

Sefam S.Box

BY
STARCK®

A new approach to sleep apnea treatment

T R E A T M E N T





- ▷ Design
- ▷ Ergonomics
- ▷ Technology
- ▷ e-Health

The S.Box concept: towards a personalized medicine

Thanks to its multi-connectivity (Bluetooth®, 3G, Wi-Fi) the Sefam S.Box® integrates physiological parameters and data related to the patient's lifestyle in addition to the treatment efficacy indicators.

The S.Box concept offers healthcare professionals the opportunity to make patient treatment and follow-up more precise as part of an adapted care pathway.

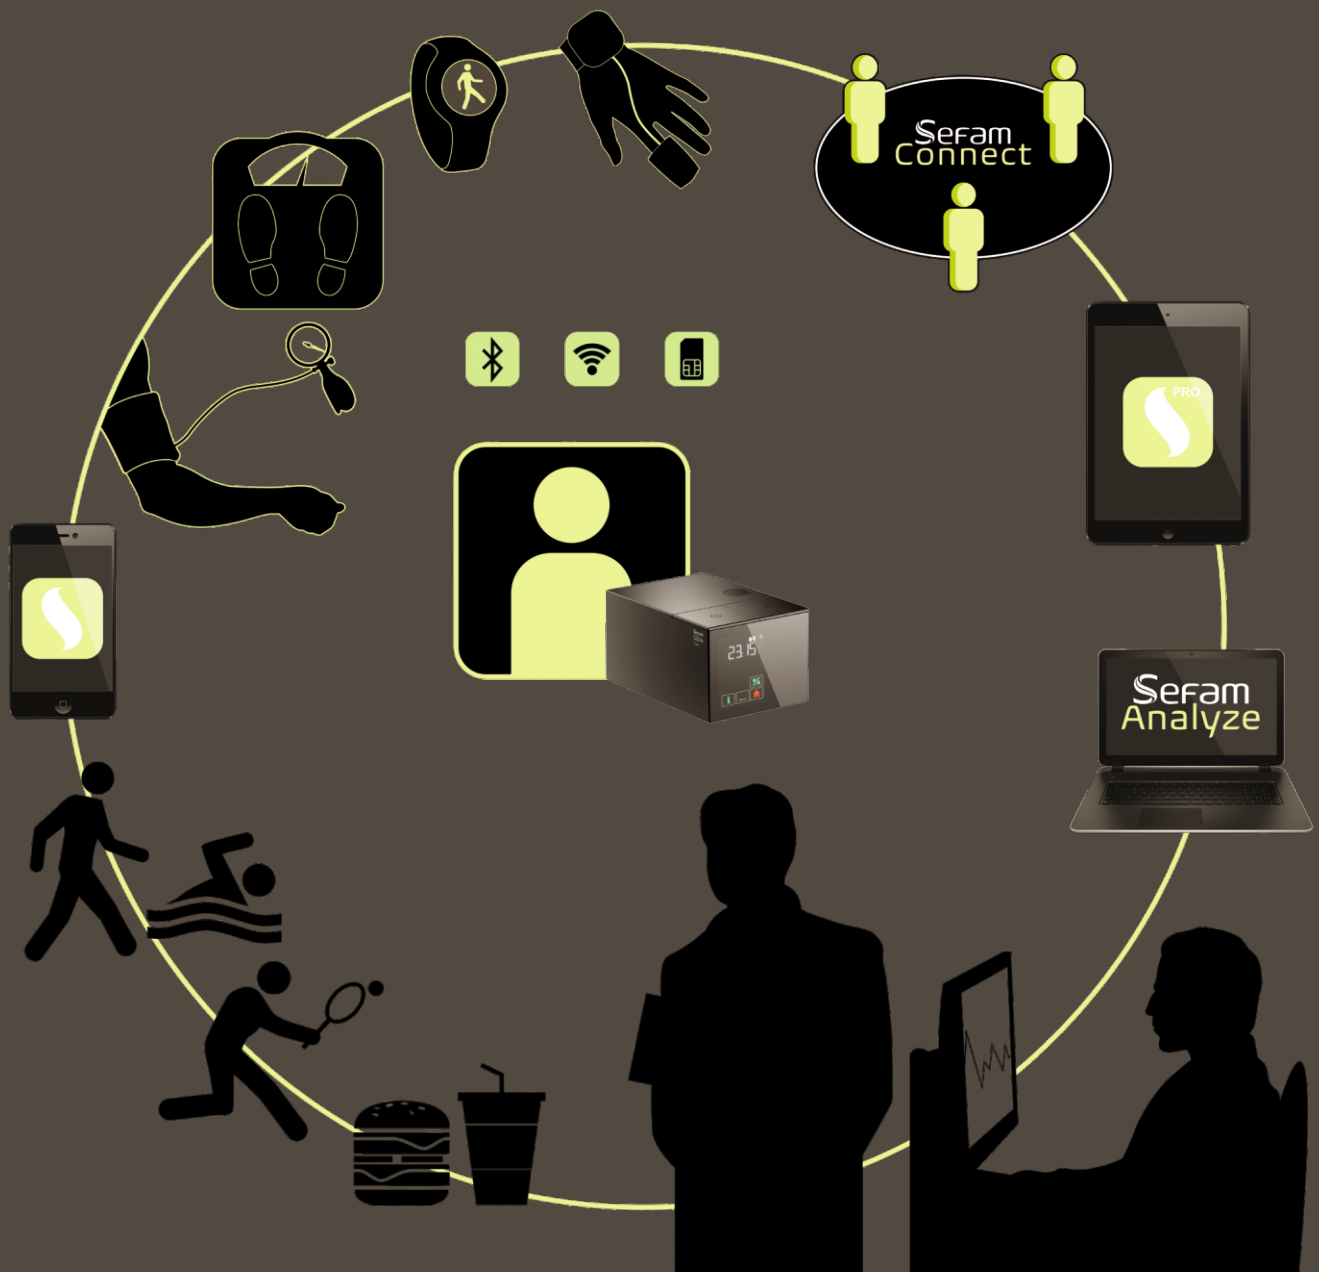

The SEFAM Connect telemonitoring platform assures the security and integration of all information transmitted by the S.Box® and other compatible connected devices.

The mobile apps SEFAM Access (for the patient) and SEFAM Access Pro (for the home care provider) provide access to this information as well as wireless communication with the S.Box®.

The SEFAM Analyze software provides precise and detailed treatment analysis to the healthcare professional.

S.Box[®]: an aggregate of technologies and innovations



iRamp*

Intelligent ramp detects the moment when the patient is falling asleep



Intelligent Start

Starts treatment automatically upon breathing in the mask



Wave & Go

Activates the display upon waving in front of the screen



Mask Fit & Go*

Easy check of the mask fit and leakage indication



CC+ mode*

Comfort Control Plus
3 levels of comfort mode



Circuit Select*

Automatically calculates the resistance/pressure drop of the entire patient circuit



Mask Select*

Calculates precisely the unintentional leak of any mask



Auto-CPAP mode*

Reacts to all respiratory events, including flow limitations and snoring



Adaptive Thermo Control

Automatically adapts the heating of the heated tube to the setting of the heated humidifier



Humid Control +*

Enables humidification without condensation



BT Oximetry

Full SpO2 data acquisition and synchronization with machine



SEFAM Analyze

New treatment analysis software

(*) Sefam Patent

The **patient** at the center of treatment

Sefam Access mobile app (for patients)

- Day-to-day follow up of treatment efficacy
- Integration of other health data from peripheral devices
- Communication with healthcare professionals
- Remote control of **S.Box®**

Sefam Access Pro mobile app (for home care providers)

- Very close follow up of patient treatment indicators
- **In app patient population management tools**
- **Preparation of patient (home) visits**
- **Access to SEFAM Connect telemonitoring platform**
- Remote settings of **S.Box®** treatment parameters
- Communication with the patient

Download the free Sefam Access and Sefam Access Pro apps on your Smartphone or tablet:



The S.Box® design, very low noise level, ergonomics and well-studied packaging make its use and transportation very easy and convenient.



For more information:



Customer Service

T. +33 (0) 3 83 44 77 40
F. +33 (0) 3 83 44 99 87
customerservice@sefam-medical.com

www.sefam-medical.com



Head Office: SEFAM - 144 avenue Charles de Gaulle - 92200 Neuilly-sur-Seine - FRANCE
Factory and offices: SEFAM - 10 allée Pelletier Doisy - 54600 Villers-Lès-Nancy - FRANCE

BRO155-03/03-2020

Sefam

Sefam S.Box

BY
STARCK®


Technical Information

T R E A T M E N T



Functionalities

- ▷ Mode: CPAP, Auto-CPAP*
- ▷ Respiratory events detection, including central hypopneas
- ▷ Ramp: Time Ramp, Intelligent Ramp*
- ▷ Comfort mode (Comfort Control +*)
- ▷ Mask unintentional leak calculation (Mask Select*)
- ▷ Control of tightness of the mask (Mask Fit & Go*)
- ▷ Resistance/pressure drop compensation (Circuit Select* (CS))
- ▷ Mask disconnection function (Mask off*)
- ▷ Automatic start upon breathing (Intelligent Start* (IS))
- ▷ Optional Heated Humidification (Humid Control +*)
- ▷ Optional heated tube with ATC (Adaptive Thermo Control*)
- ▷ Touchless display activation (Wave & Go*)
- ▷ Altitude compensation automatic
- ▷ Leaks compensation automatic
- ▷ Optional connectivity: 3G Modem, Wi-Fi
- ▷ Telemonitoring with SEFAM Connect
- ▷ Treatment analysis software: SEFAM Analyze
- ▷ Optional Bluetooth oximetry
- ▷ Compatibility with SEFAM Access application (for patient and for health professionals)
- ▷ Display: Symbols

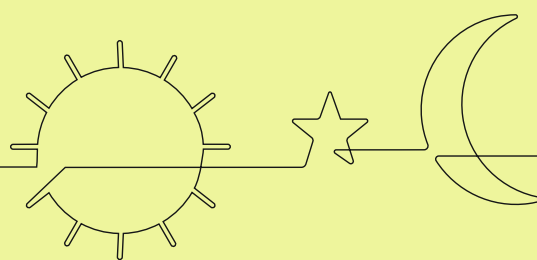

Settings and technicals characteristics

- ▷ Pressure range: 4-20 cm H₂O in steps of 0.5 cm H₂O
- ▷ Dimension : 24,4 x 14 x 11 (+4,5 cm with humidifier)
- ▷ Weight: 1.4 kg (1.7 kg with humidifier)
- ▷ Sound level: 26 dBA
- ▷ Maximum Flow: 180 l/mn at 20 cm H₂O
- ▷ Patient tubing: 15mm, 22 mm (1,8 m long)
- ▷ Data Collection: SD Card, serial Bluetooth, USB

Electrical characteristics

- ▷ Input tension: 24V
- ▷ Electrical supply (class II): Input range: 85-264 VAC, 47-63 Hz
- ▷ Maximum electrical power: 25 W (without humidifier), 75 W (With humidifier and heated tube)
- ▷ 93/42/EC Classification: Class IIa
- ▷ RF Emission (Bluetooth version 2.1+EDR): Frequency 2,400 à 2,483.5 MHz (ISM band).

Environmental requirements

- ▷ Temperature: +5°C to +40°C with cover, +5°C to +35°C with humidifier
- ▷ Humidity: 15% to 90% relative humidity without condensation
- ▷ Storage: -25°C to +70°C, ≤ 90% relative humidity without condensation
- ▷ Altitude: From the sea level to about 2,500 meters

Sefam S.Box

BY
STARCK®

Ordering Information

SEFAM S.Box®

M-116412

S.Box® heated humidifier
S.Box® humidifier chamber
Oximeter 3150

M-216430-06
M-216430-15
3150-0201

Travel accessories:

S.Box® carrying bag
S.Box® by Starck carrying case
S.Box® cigarette cable (24 VDC-5 m)

M-816405-00
M-816405-01
M-216430-08

Connectivity:

Modem S.Box®
Module WIFI S.Box®

M-116500
M-116900

Machine data analysis:

SEFAM Analyze Software
S.Box® SD card
S.Box® USB cable

M-215630-04
M-216430-05
M-216430-09

Tubing:

S.Box® heated tube
S.Box® Ø 15 mm standard tube
S.Box® Ø 22 mm standard tube

M-216430-07
M-261000-05
M-261000-06


Divers:

Inlet air filters (50 pcs)
S.Box Power supply


M-315940-01
M-416410-00



Heated tube symbol and direct access to settings

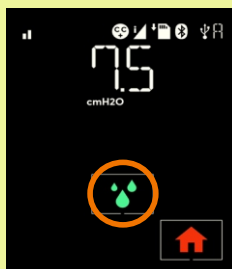

Humidifier symbol and direct access to settings



Sefam S.Box® by Starck

For more information:



Customer Service

T. +33 (0) 3 83 44 77 40
F. +33 (0) 3 83 44 99 87
customerservice@sefam-medical.com

www.sefam-medical.com



Factory and offices: SEFAM - 144 avenue Charles de Gaulle - 92200 Neuilly-sur-Seine - FRANCE
Head Office: SEFAM - 10 allée Pelletier Doisy - 54600 Villers-Lès-Nancy - FRANCE

CE 0459
BR0158-04/03-2020

Sefam