



Alternator Fleet RUL Degradation -- Failed vs In-Service (real per-VIN windows, shared RUL scaling) | V11.1_ALT | NO_IMPROVEMENT

FAILED alternators (n=10) -- real data window, X at realised failure

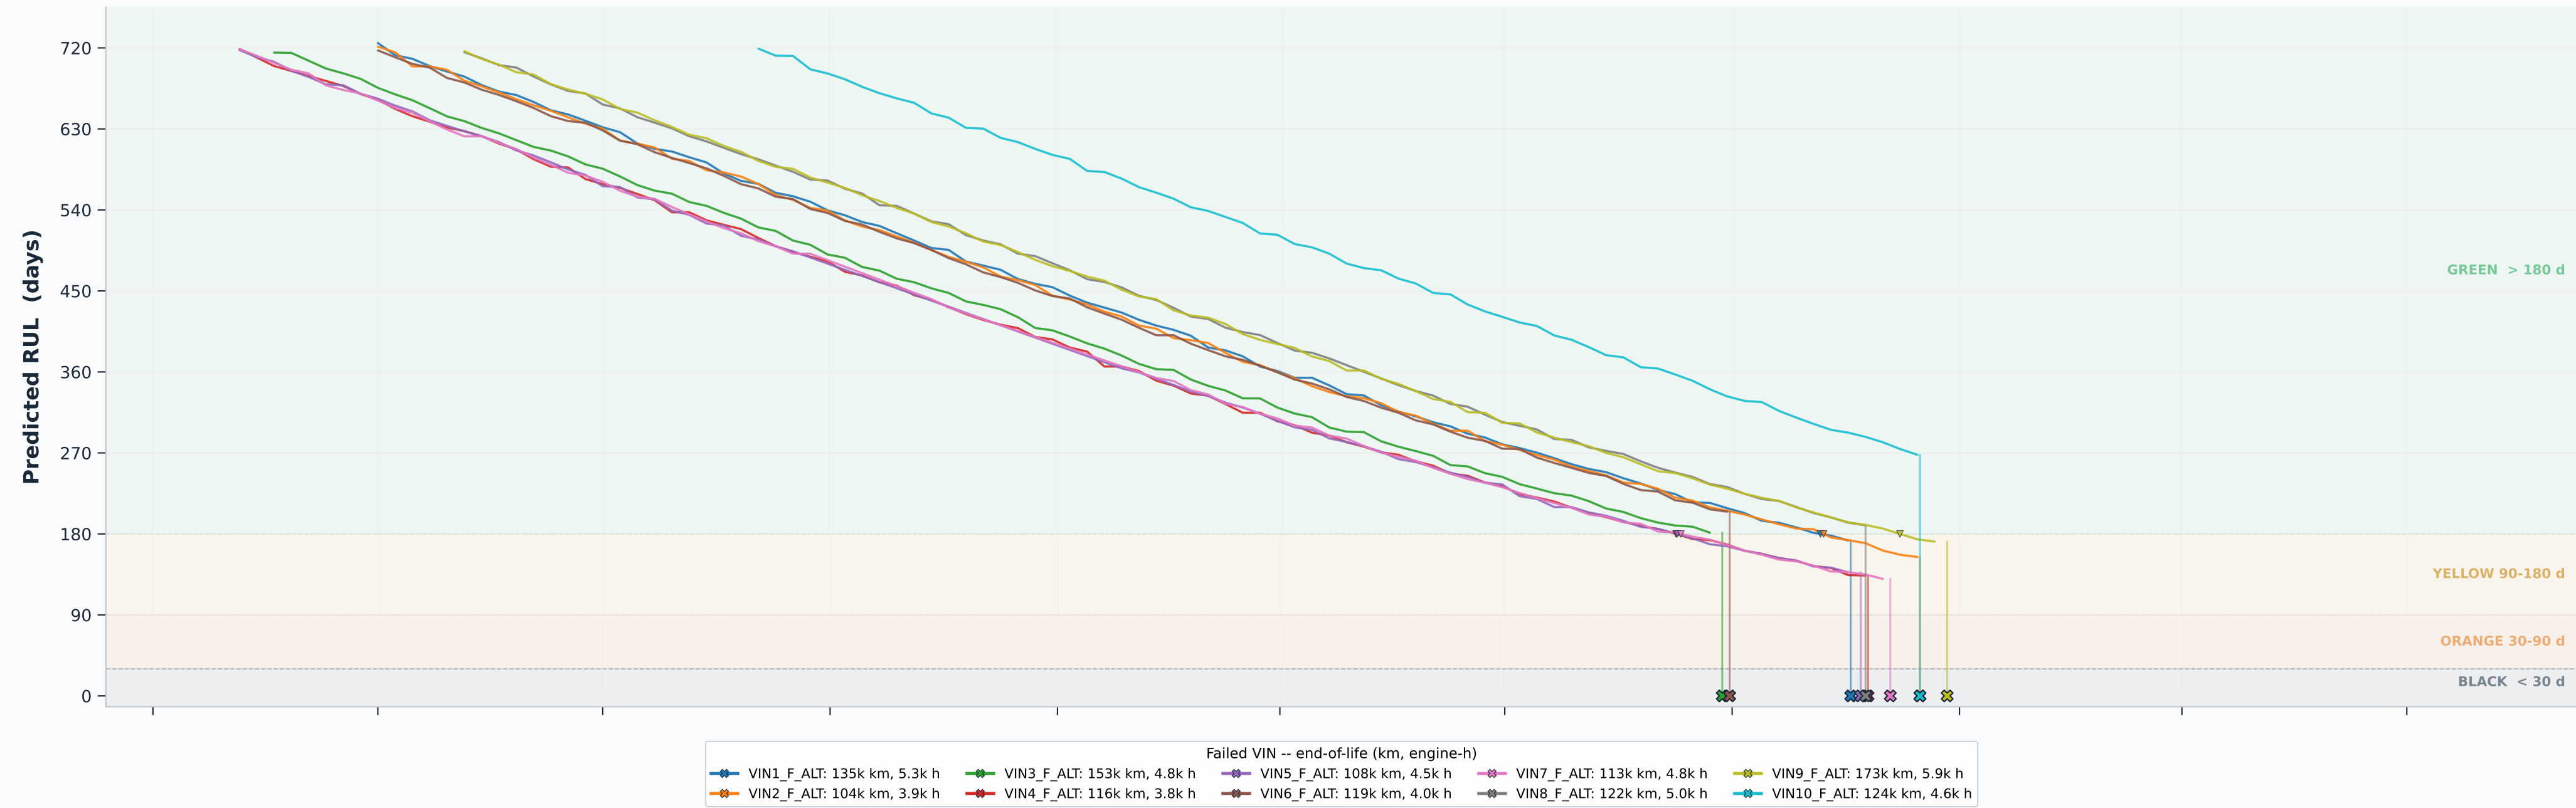

IN-SERVICE alternators (n=15) -- observed (solid) + forecast (dotted)

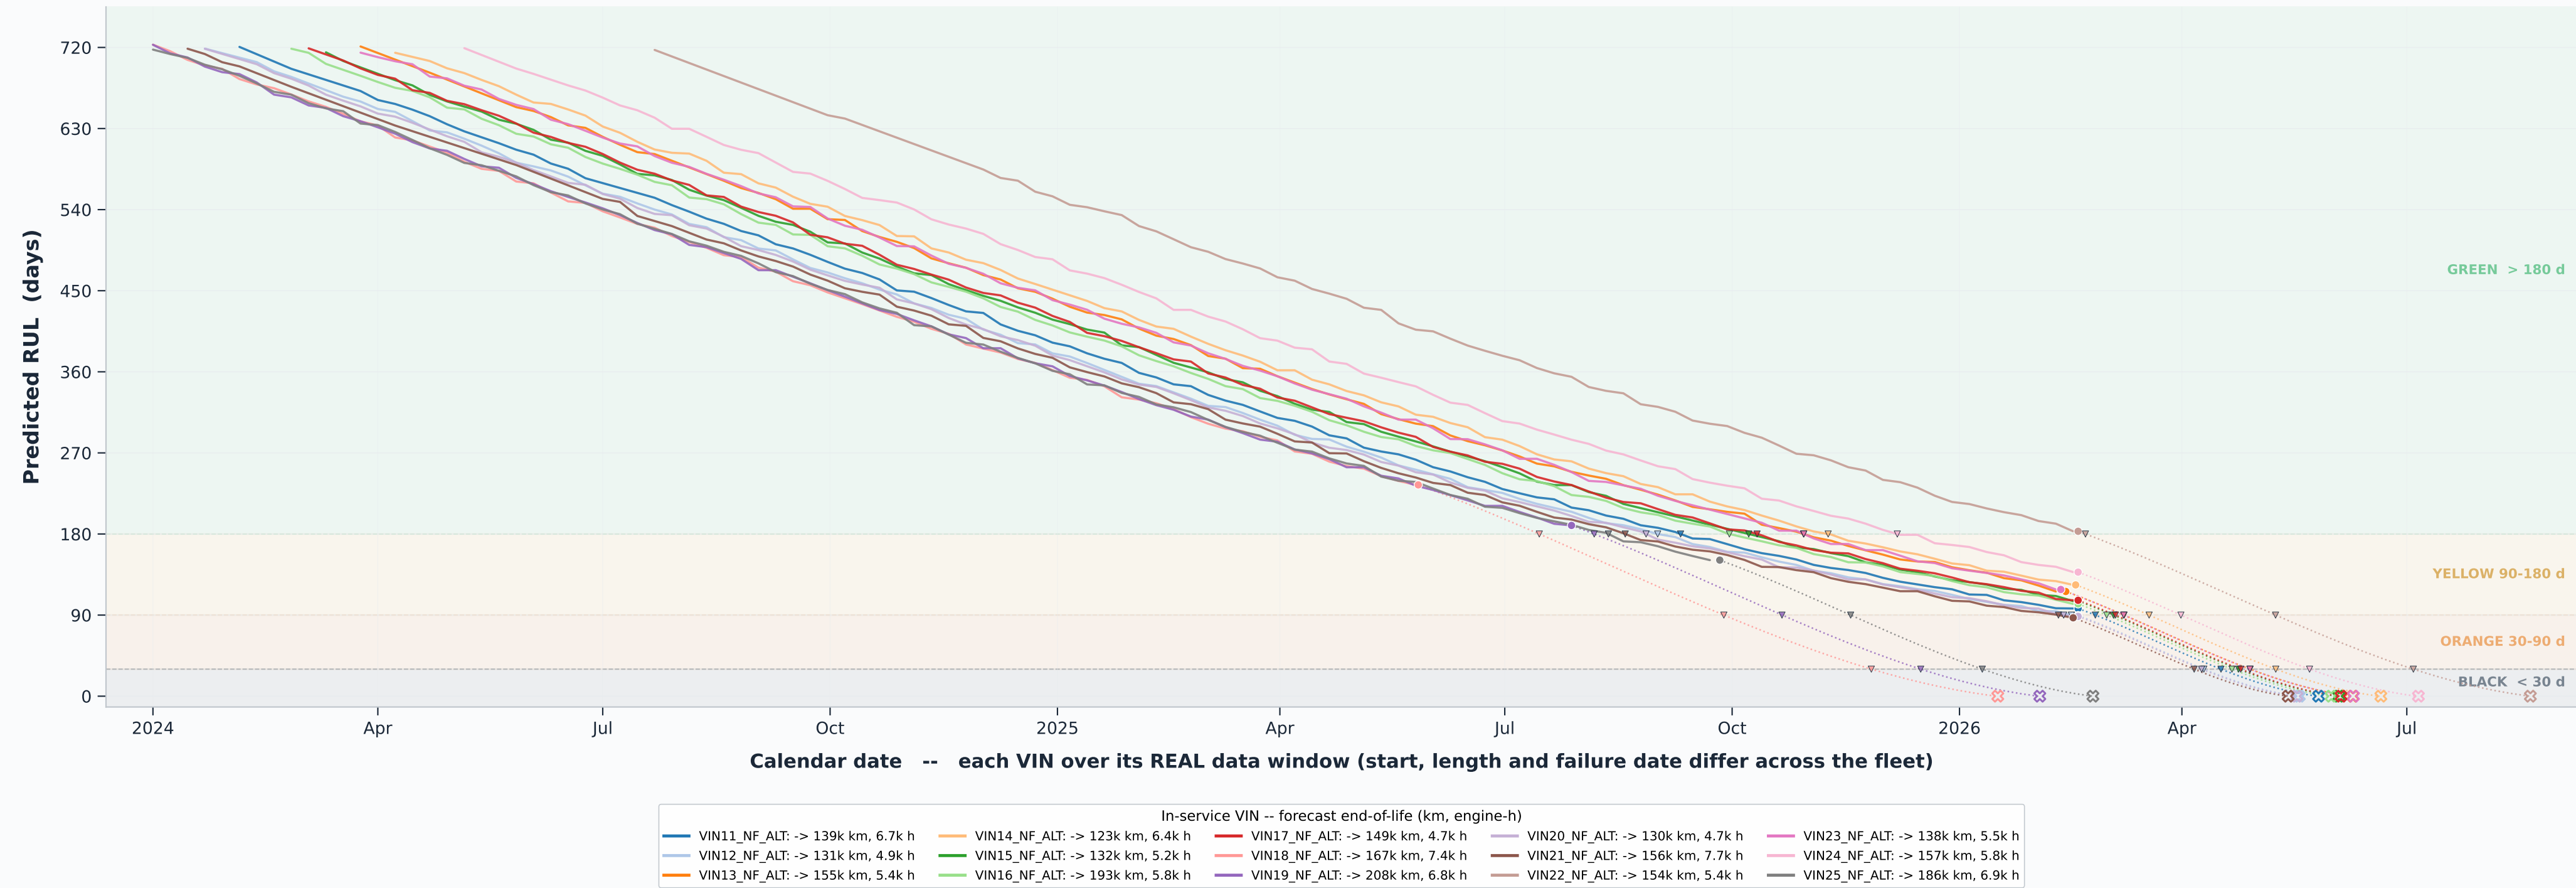

Each VIN on its REAL calendar window (no common day-0; start/length/failure date differ). RUL = fleet Weibull posterior M_0 ($n=10$ events, covariates NO_IMPROVEMENT); per-truck timing not predictable (backtest 140.4d > 49.7d fleet clock). Legend shows each truck's real end-of-life est. km + engine-hours. Risk tier = STATIC classifier (AUROC 0.927 = which, not when).