


Alternator Fleet RUL Degradation -- FAILED Vehicles (n=10)

Each line = one failed alternator over its real data window; X = realised failure (RUL=0). Fleet wear-out window = 578-652 d (median 601 d); legend gives each truck's end-of-life km + engine-h.

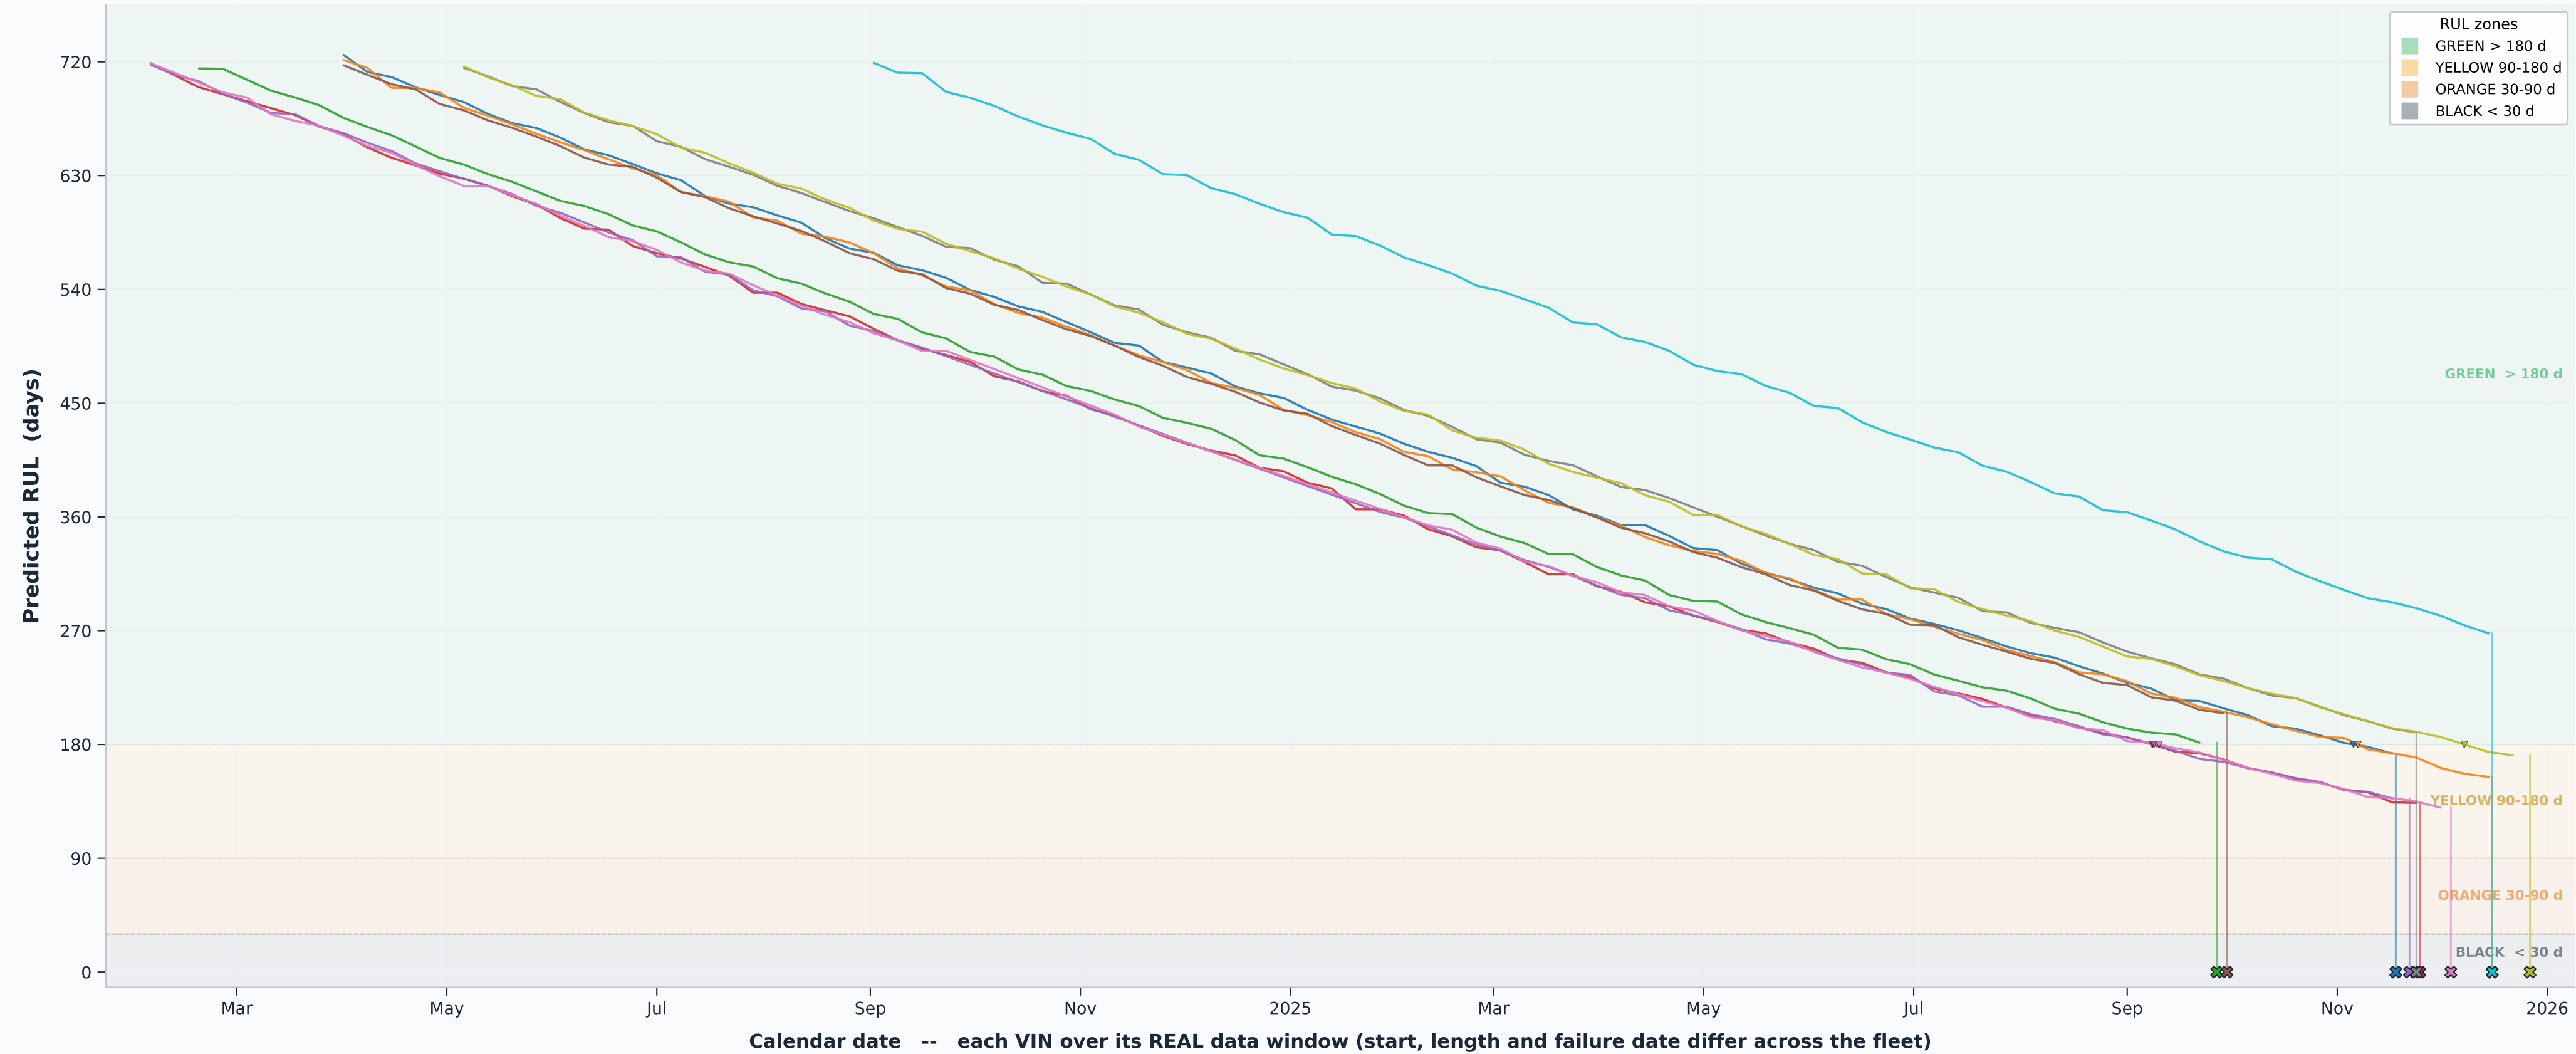

Each VIN on its REAL calendar window (no common day-0; start/length/failure date differ). RUL = fleet Weibull posterior median (n=10 events); per-truck timing not predictable (backtest 142d > 50d fleet clock). Legend shows each truck's real end-of-life est. km + engine-hours. Risk tier = STATIC classifier (AUROC 0.927 = which, not when).