

OCTane - Firmware for steering of galvanometer-scanners in OCT-Systems

Florian Hinterleitner



MASTERARBEIT

eingereicht am
Fachhochschul-Masterstudiengang

embedded systems design

in Hagenberg

im Juni 2022

Advisor:
Langer, Rankl, Zorin

© Copyright 2022 Florian Hinterleitner

This work is published under the conditions of the Creative Commons License *Attribution-NonCommercial-NoDerivatives 4.0 International* (CC BY-NC-ND 4.0)—see <https://creativecommons.org/licenses/by-nc-nd/4.0/>.

Declaration

I hereby declare and confirm that this thesis is entirely the result of my own original work. Where other sources of information have been used, they have been indicated as such and properly acknowledged. I further declare that this or similar work has not been submitted for credit elsewhere. This printed copy is identical to the submitted electronic version.

Hagenberg, June 15, 2022

Florian Hinterleitner

Contents

Declaration	iv
Preface	vii
Abstract	viii
Kurzfassung	ix
1 Introduction	1
1.1 Motivation	1
1.2 Optical coherence tomography	1
1.3 Galvanometer-Scanners	2
1.4 Control of Galvanometer-Scanners	3
1.4.1 optional: adapted steering curves	4
2 Theory	5
2.1 Code Quality	5
2.1.1 Coverage metrics	5
2.1.2 Reviews	5
2.1.3 Load/Fault tests	5
2.1.4 PM and ReqEng	5
2.2 Theory - CI/CD	5
2.2.1 CI/CD with open source on BareMetal	5
2.2.2 reliable USB-Connectivity	5
2.3 Theory - Galvos	5
2.3.1 sensitive steering of Galvos	5
3 Hardware	6
3.1 STM32F4	6
3.2 Wandler, Level-Shifter, HighSider	6
4 Software tools	7
4.1 CubeIDE	7
4.2 gcov	7
4.3 valgrind	7
4.4 gitlab	7

Contents	vi
4.5 runner	7
4.6 HiL-Setup	7
5 Requirements	8
5.1 FW-REQ	8
5.2 TCs	8
6 Implementation	9
6.1 Konzepte	9
6.2 FSM und Trigger-Diagramme	9
7 Results	10
7.1 Test-Res	10
7.2 Coverages	10
7.3 Review-remakrs	10
7.4 Gavlo-Performance	10
A Technical Details	11
B Supplementary Materials	12
B.1 PDF Files	12
B.2 Media Files	12
B.3 Online Sources (PDF Captures)	12
C Questionnaire	13
D LaTeX Source Code	14
References	15

Preface

This document uses the APA citation and reference style (see Ch. ?? for details).

Abstract

To-Do: detuschen abstract ubersetzen

Kurzfassung

Die Firma RECENDT GmbH entwickelt und baut OCT-Systeme (optical coherence tomography), für die im Rahmen dieser Diplomarbeit ein Teil der Steuerung entworfen werden soll. Zur 2-dimensionalen Messung mit OCT-Systemen kommen Galvanometer-Scanner im X/Y-Betrieb zum Einsatz. Das sind hochdynamische Drehantriebe für optische Anwendungen, die mit einer Rate von rund 500Hz etwa 20° vor- und rückwärts rotieren können. Sie tragen mitrotierende Spiegel um den optischen Pfad in 2 Dimensionen auszulenken und somit flächige Scans zu ermöglichen.

Die ausgewählten Galvo-Modelle benötigen Steuersignale zur Erzeugung der Scan-Muster. Typischerweise sind dies zwei synchrone Rampen-Signale, eines schnell, eines langsam. Aufgabe ist es nun, auf bestehender Mikrocontroller-Hardware einen Signalgenerator zu programmieren. Dieser soll sowohl Rampen-Signale als auch arbiträr gewählte Signalformen erzeugen können. Dies beinhaltet FW-Module für die Digital-Analog-Wandler, Trigger-Einheit für das Timing sowie Synchronisation der Kanäle. Weiters ist die USB-Kommunikation per SCPI-Protokoll zu programmieren. Die Anbindung an eine übergeordnete Steuerung des OCT-Systems erfolgt per USB. Die handelsüblichen Galvo-Scanner besitzen mechanische Trägheiten, die bei Scan-Raten ab 800Hz keine maximale Auslenkung mehr erlauben. Deshalb würde bei hohen Geschwindigkeiten der optische Messbereich eingeschränkt werden. Um auch bei höheren Scan-Raten volle Auslenkungen zu erreichen, soll versucht werden, mit adaptierten Steuersignalen die Trägheiten auszugleichen.

Chapter 1

Introduction

1.1 Motivation

The RECENDT GmbH researches, develops and produces, among other technology areas, measurement systems employing optical coherence tomography. A key element of such OCT-systems are galvanometer-scanners. These allow for analyzation of areas, instead of only point-wise measurements, by manipulating a laser-beam. This manipulation again, has to be controlled via two separate steering-voltages, one for manipulation in x- and y-axis. An existing mikrocontroller-board, providing sufficient precise and fast DACs, is to be programmed, to form the 'OCTane', a signal-generator for mentioned steering-voltages, controllable via USB. The resulting Firmware shall also incorporate a HAL, utilizing several other functionalities, the microcontroller has to offer. Optionally, adapted curves for the steering voltages shall be investigated to allow linear control over galvanometer-scanners in higher frequency ranges.

1.2 Optical coherence tomography

Optical coherence tomography (OCT) is an imaging measurement method for the analyzation of transparent and semi-opaque materials and shows similarities to the measurement processes via ultrasound or radar. The sample to be measured is subjected to an electromagnetic wave, the resulting 'echoes' are analysed with regard to their times of flight. From these run-times again, the geometric structure is determined, including the layer structure of the sample and also the maximum penetration depth of the applied wave. This creates measured point with an in-depth resolution. Usually this EM wave is of a coherent broadband light source in the visible up to the near infrared spectrum. Coherent means, that several wave-bundles of a light source must have a fixed phase relationship to eachother. This is necessary to obtain stable interference patterns. For the Detection of the echoes, however, conventional opto-detectors or cameras do not suffice, on the one hand due to the propagation speed of light, on the other hand due to the low reflected light intensities. Therefore Interferometry is used to determine the depth of penetration of a photon, being reflected from the sample. In interferometry, a laser beam is split into two waves of half the initial optical power. One wave is sent on an optical reference path of known length, the other to the surface of the sample. The

reflections, the returning waves are superimposed and, depending on the nature of the sample material, result in constructive or destructive Interference. This interference can be detected using an opto-detector[1], or a spectrometer[2] and used for further processing. A single measured point and its depth information about the material under test is called an A-scan. Aggregates a lot of A-scans along a line (X-direction) across the sample material, forms a B-scan and the aggregation of B-scans along a line in the Y direction a volume scan, i.e. a spatial, three-dimensional image of the sample material. Relevant parameters of OCT systems are the penetration depth, the axial and lateral measurement range, axial and lateral resolution and the measurement speed. While the penetration depth of ultrasound typically reaches a few centimeters and a resolution in the millimeter range, OCT allows only to look a few millimeters below the surface, but with micron resolutions. Measurable areas, or field-of-view, in ultrasound is in the order of centimeters, with OCT in the order of millimeters[1]. achievable speed al results from A-scan rates up to 100kHz. The term 'optical coherence tomography' results on the one hand from the coherent light source. The other two parts of the name, 'tomos' means slice or section, and 'graphein' stand for writing or drawing, and both come from Greek. They reflect that the resulting image is assembled from individual slices or sectional images. The manipulation of the light beam along the mentioned lines takes place with rotatably mounted mirrors, one for the X one for the Y direction. The faster this rotation is possible, the faster OCT-images can be created. One widespread technical realization, allowing very fast rotation of the mirrors called a galvanometer-mirror or -scanner.

1.3 Galvanometer-Scanners

To-Do: 'scanner' statt 'mirror'

Galvanometer scanners (colloquial: galvos) are highly dynamic opto-mechanical components, based on the classic galvanometer according to Hans Christian Oersted: A rotatable, magnetizable object, e.g. a magnetic needle, that will be deflected from its position in the proximity of a current-carrying conductor. The low sensitivity of the effect on the current is improved by a high number of windings of the electric conductor around the deflectable object, creating an electrical Inductance, a coil. The non-linear connection between current and deflection angle can be linearized to a first-order approximation, by placing the coil between a rigidly potitioned iron-cylinder inside and a permanent-magnet, which is arranged outside the coil[2]. If this classic Galvanometer is equipped with a mirror as a rotatable object, optical paths, specifically: the beam-path of a point light source, can be manipulated in one space dimension. Feaseable for technical applications is, that this manipulation can be controlled reasonably linear by the current or voltage at the galvo coil. With the galvanometer-scanner employed for this master-thesis, power-electronics for the conversion of control signals to the required coil-currents and -voltages were already included. Therefore, furthermore, only 'control signals' will be discussed, instead of currents and voltages. A combination of two galvanometer scanners in a suitable geometric arrangement, irradiated with a point laser, allows to manipulate this point 2 dimensions. Such an arrangement is shown in fig. []. At sufficient speed with which the laser point is deflected, 2-dimensional contours can be projected, resulting in a 'stationary' image for the human eye. It shall be noted,

that only closed geometric figures are possible, as long as the light source itself cannot be turned off. These components are commercially available as laser scanner and used for light effects at music events, art installations and in discotheques. Applied to OCT-systems, on the other hand, galvanometer scanners are used to expand measurement from a single point of interest. Deflecting mentioned coherent light source of an area of an examined sample, allows for two-dimensional analysis of the sample. If a dedicated x- and a y-galvo are to be steered with a slow and a fast ramp, respectively, this results in a rectangle on the sample, which is the desired 'image shape' of the laser dot for OCT systems. In this way, samples can be scanned in a grid pattern.

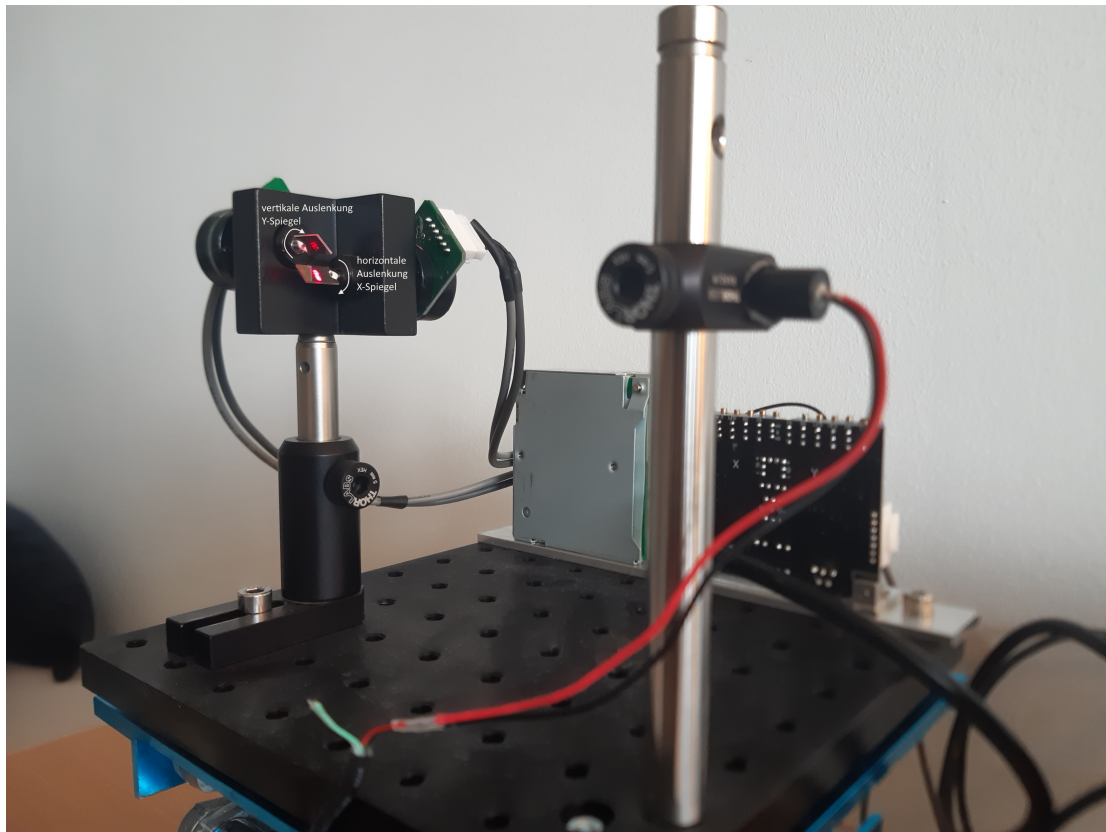


Figure 1.1: DetailGalvoOn

1.4 Control of Galvanometer-Scanners

OCTane is a mikrocontroller-board with 16bit-analog-outs to steer galvos and needs a FirmWare

block-schematic: PC -> OCTane -> 2xDAC -> Galvo-Driver

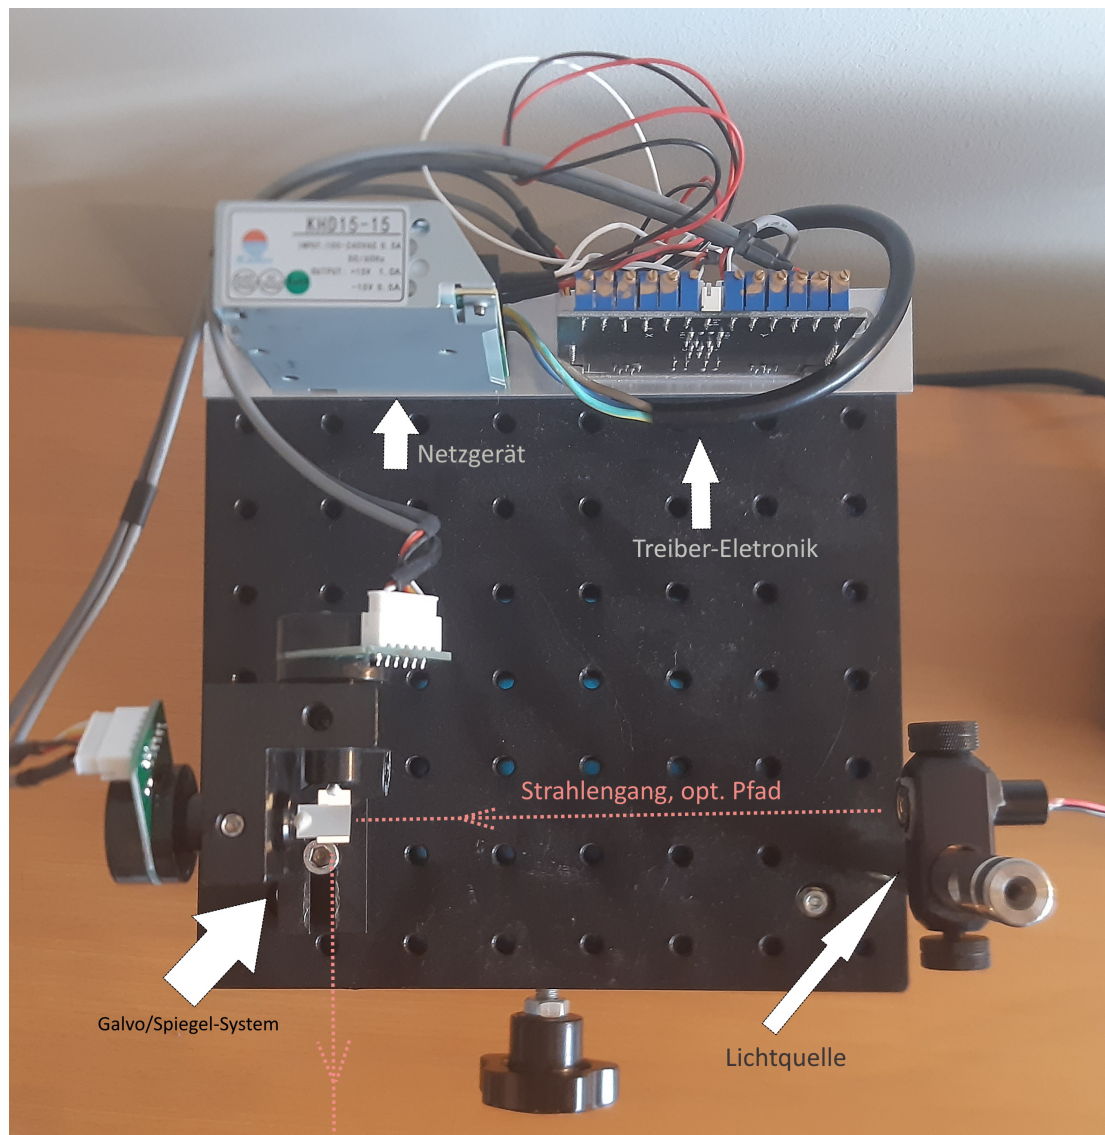


Figure 1.2: DutTop02

1.4.1 optional: adapted steering curves

To-Do: Modell ausm Paper per flachheitsbasierter Regelung auf Steuer-rampen draufrechnen

Chapter 2

Theory

2.1 Code Quality

2.1.1 Coverage metrics

2.1.2 Reviews

2.1.3 Load/Fault tests

2.1.4 PM and ReqEng

2.2 Theory - CI/CD

2.2.1 CI/CD with open source on BareMetal

2.2.2 reliable USB-Connectivity

2.3 Theory - Galvos

2.3.1 sensitive steering of Galvos

Chapter 3

Hardware

3.1 STM32F4

3.2 Wandler, Level-Shifter, HighSider

Chapter 4

Software tools

4.1 CubelDE

4.2 gcov

4.3 valgrind

4.4 gitlab

4.5 runner

4.6 HIL-Setup

Chapter 5

Requirements

5.1 FW-REQ

5.2 TCs

Chapter 6

Implementation

6.1 Konzepte

6.2 FSM und Trigger-Diagramme

Chapter 7

Results

7.1 Test-Res

7.2 Coverages

7.3 Review-remakrs

7.4 Gavlo-Performance

Appendix A

Technical Details

Appendix B

Supplementary Materials

List of supplementary data submitted to the degree-granting institution for archival storage (in ZIP format).

B.1 PDF Files

Path: /

thesis.pdf Master/Bachelor thesis (complete document)

B.2 Media Files

Path: /media

*.ai, *.pdf Adobe Illustrator files
*.jpg, *.png raster images
*.mp3 audio files
*.mp4 video files

B.3 Online Sources (PDF Captures)

Path: /online-sources

Reliquienschrein-Wikipedia.pdf (**WikiReliquienschrein2020**)

Appendix C

Questionnaire

Appendix D

LaTeX Source Code

References