

SELECT MODEL

1 Series	400 DGC			
2 Type	G	Gauge	S	Switch
	GS	Gauge + Switch		
3 Body material	A	Aluminum		
	S	SS-316		
4 Dial size	2.5	2.5" (63 mm)	4.5	4.5" (115 mm)
	3.5	3.5" (80 mm)	6.0	6.0" (150 mm)
	4.0	4.0" (100mm)		
5 Connection	4N	1/4" NPT (F) (Std.)	4B	1/4" BSP (F)
	ZZ	Special connection sizes using adaptor		
6 Porting	1	In-line (Std.)	5	In-line & vent
	2	Rear / Back	6	In-line & bottom
	3	Bottom	8	In-line & back
	4	Bottom & vent		
7 Case	S4	SS 304 (Std.)	S6	SS 316
	F4	SS 304 flange		
	EP	Engineering polymer (available in 2.5", 4.5", 6.0" only)		
	BF	Bayonet (available in 4.0" safety glass only)		
8 Window	F	Glass (Std.)	A	Acrylic
	T	Toughened glass	L	Safety glass
9 Seals/Diaphragm	B	Buna-N (Std.)	E	EPDM
	V	Viton		

Advantages :

Instrument automatically resets after line surges and cold start.
This eliminates balancing of differential pressure instrument after such events.

Notes

- 1.6% accuracy available on request.
- For SS 316 case, please contact factory (MOQ applies).
- Liquid filling + Follower pointer available.
- Switch adjustment range between 20-80% of full scale deflection (FSD). For specific details, please contact factory.
- Mounting bracket: Aluminum (Standard) ; SS (Optional)

10 Switch

0	None
1	One SPST, with a DIN plug †
2	One SPST, with a terminal strip
2A	One SPST, with built in relay
3	Two SPSTs, with a DIN plug †
4	Two SPSTs, with a terminal strip
4A	Two SPSTs. with built in relay

+

SPST Specifications (AC/DC max)

1 Standard	2	3	4
10 VA	40 VA	100 VA	60 VA
100 V	230 V	300 V	240 V
0.5 Amp	1 Amp	1 Amp	3 Amp
Adjustable	Adjustable	Adjustable	Adjustable

5	One SPDT, with a DIN plug †
6	One SPDT, with a terminal strip
7	Two SPDTs, with two DIN plugs
8	Two SPDTs, with a terminal strip

+

SPDT Specifications (AC/DC max)

1 Standard	2	3
3 VA	5 VA	5 VA
30 V	125 V	175 V
0.3 Amp	0.25 Amp	0.25 Amp
Adjustable	Adjustable	Adjustable

Example: Switch selection 21 is 1 SPST with terminal strip
with switch specifications 10VA, 100V, 0.5Amp

† DIN plug mounted on the top.

11 Range

Standard ranges : (Other ranges & units on request)

mm H2O	25	50	125	250	600
In. H2O	1	2	5	10	25
mbar	-	5	-	25	60
kPa	0.25	0.5	1.25	2.5	6


12 Options

0	None
A	Glycerine*
B	Red follower pointer on acrylic window *
C	Customer Logo
D	Dual scale
E	Colour band
F	Filter mesh in (+) connection
G	Reverse Port**
H	Descending calibration (long delivery time)
N	NACE
S	Silicone oil*
I	Oxygen service (Contact factory)
M1	2" horizontal pipe mounting bracket
M2	Surface mounting bracket
M3	2" vertical pipe mounting bracket

* Affects accuracy

** Pointer moves from right to left

Ordering code sequence

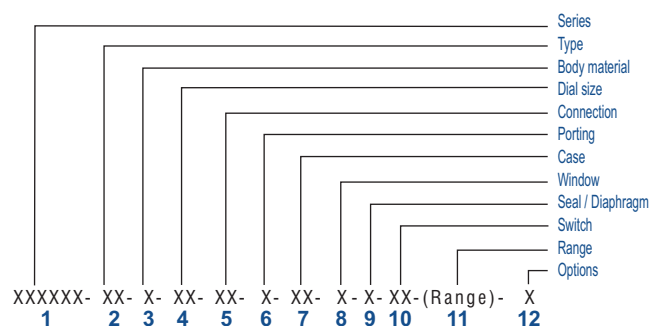

Contact factory for special execution.