STANDARD DIMENSIONS (MODEL 700 DGC) (WITH SS CASE AND FLANGE CASE)

100 (4")

9.0


23.0

19

69.7

85.2

112

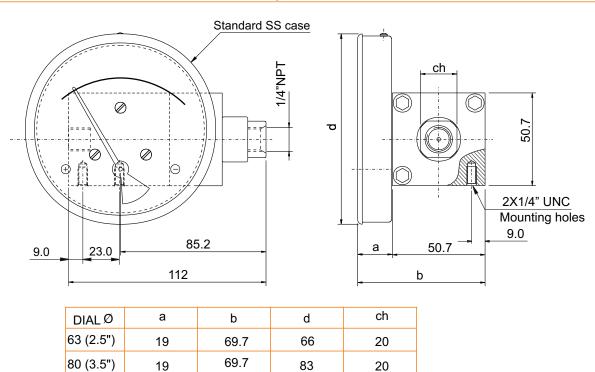

115(4.5")	19	69.7	119.7	20	
150(6")	19	69.7	154.3	20	
	_	04.2 PLACES		d2	<u>2</u>
		FLANGE	ECASE	f	
1209	1,000		do C.D.	P	ch

104.3

20

DIALØ	а	b	d1	d2	ch	p.c.d.	d *
63(2.5")	19	69.7	93	65	20	83	66
80(3.5")	19	69.7	109	82	20	99	83
100(4")	19	69.7	131	102	20	121	104.3
115(4.5")	19	69.7	146	117	20	136	119.7
150(6")	19	69.7	181	152.5	20	171	154.3

50.7

b


а

Mounting holes


9.0

STANDARD DIMENSIONS (MODEL 700 DGC) WITH ENGINEERING POLYMER CASE


(SD) 2-1/2" DIAL SIZE

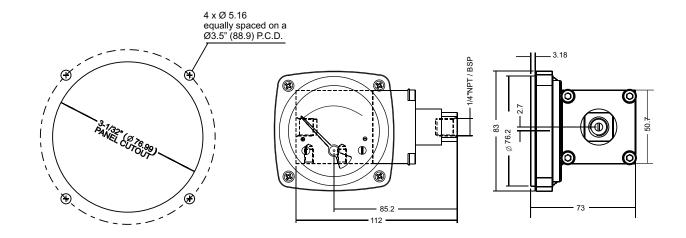


(RD) 4-1/2" DIAL SIZE

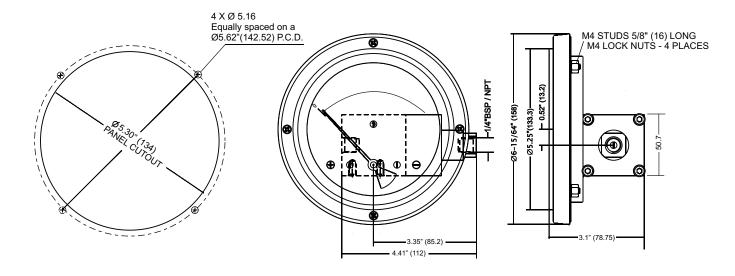

(LD) 6.0" DIAL SIZE

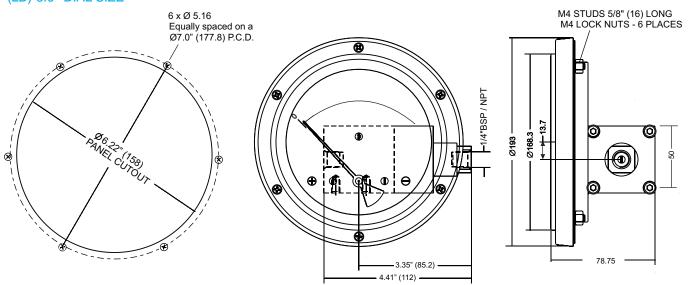

GAUGE + SWITCH WITH REED CONTACTS WITH DIN PLUG AND TERMINAL STRIP (MODEL 700 DGC)

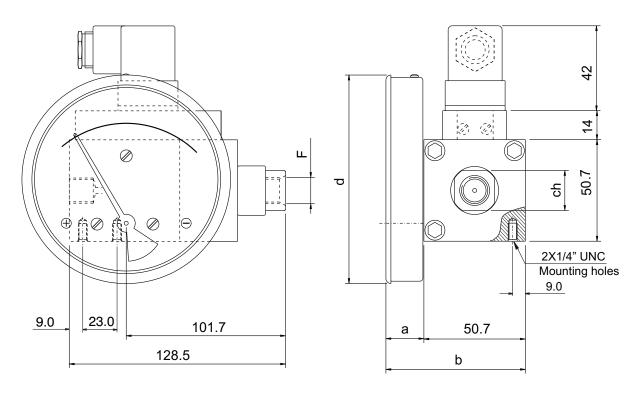

DIAL Ø	F	а	b	d	ch
63	1/4"BSP - 1/4"NPT	19	69.7	66	20
80	1/4"BSP - 1/4"NPT	19	69.7	83	20
100	1/4"BSP - 1/4"NPT	19	69.7	104.3	20
115	1/4"BSP - 1/4"NPT	19	69.7	119.7	20
150	1/4"BSP - 1/4"NPT	19	69.7	154.3	20

