



COMBINATIONS

VISUAL




VISUAL + ELECTRICAL (DIN PLUG)



SINGLE WIRE SWITCH



INDICATOR PORT DETAIL

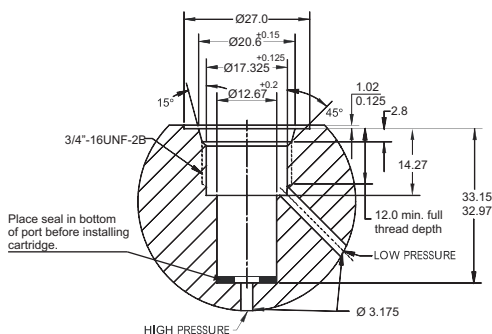

Note : Top portion of indicator port parallel to SAE-8


SALIENT FEATURES

- Visual (Snap action)
- Visual (Gradual / sliding)
- Visual + Electrical (DIN plug)
- Single wire switch


DP INDICATORS

Specifications


Body	Aluminium
Seals	Buna-N, Viton (optional)
Thread connection	3/4"UNF(M)
Δ P setting	5 psi, 15 psi, 25 psi, 50 psi
Electrical	For DP indicator standard DIN appliance plug with screwed cable gland Pg9. Both NO and NC contacts are available.
Electrical rating	DP Indicator DIN plug : 3 poles + Earth, 230V AC, 10 Amps. Micro switch : SPDT 250V AC / 24V DC, 5Amps (resistive)
Max. pressure	Single wire switch 36V DC, 200m Amps
Max. temperature	6000 PSI 120°C / 250°F




Visual



Single wire switch



Visual + Electrical
(DIN plug)

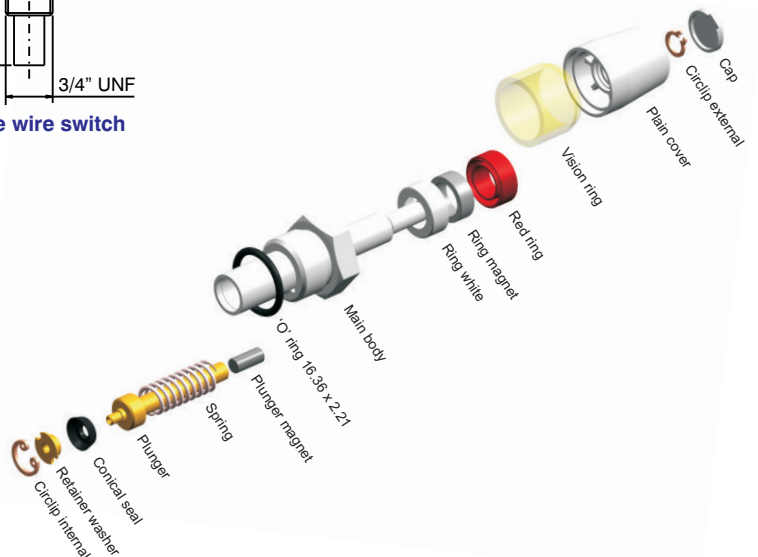

Note : Exclusively manufactured for a U.S. customer