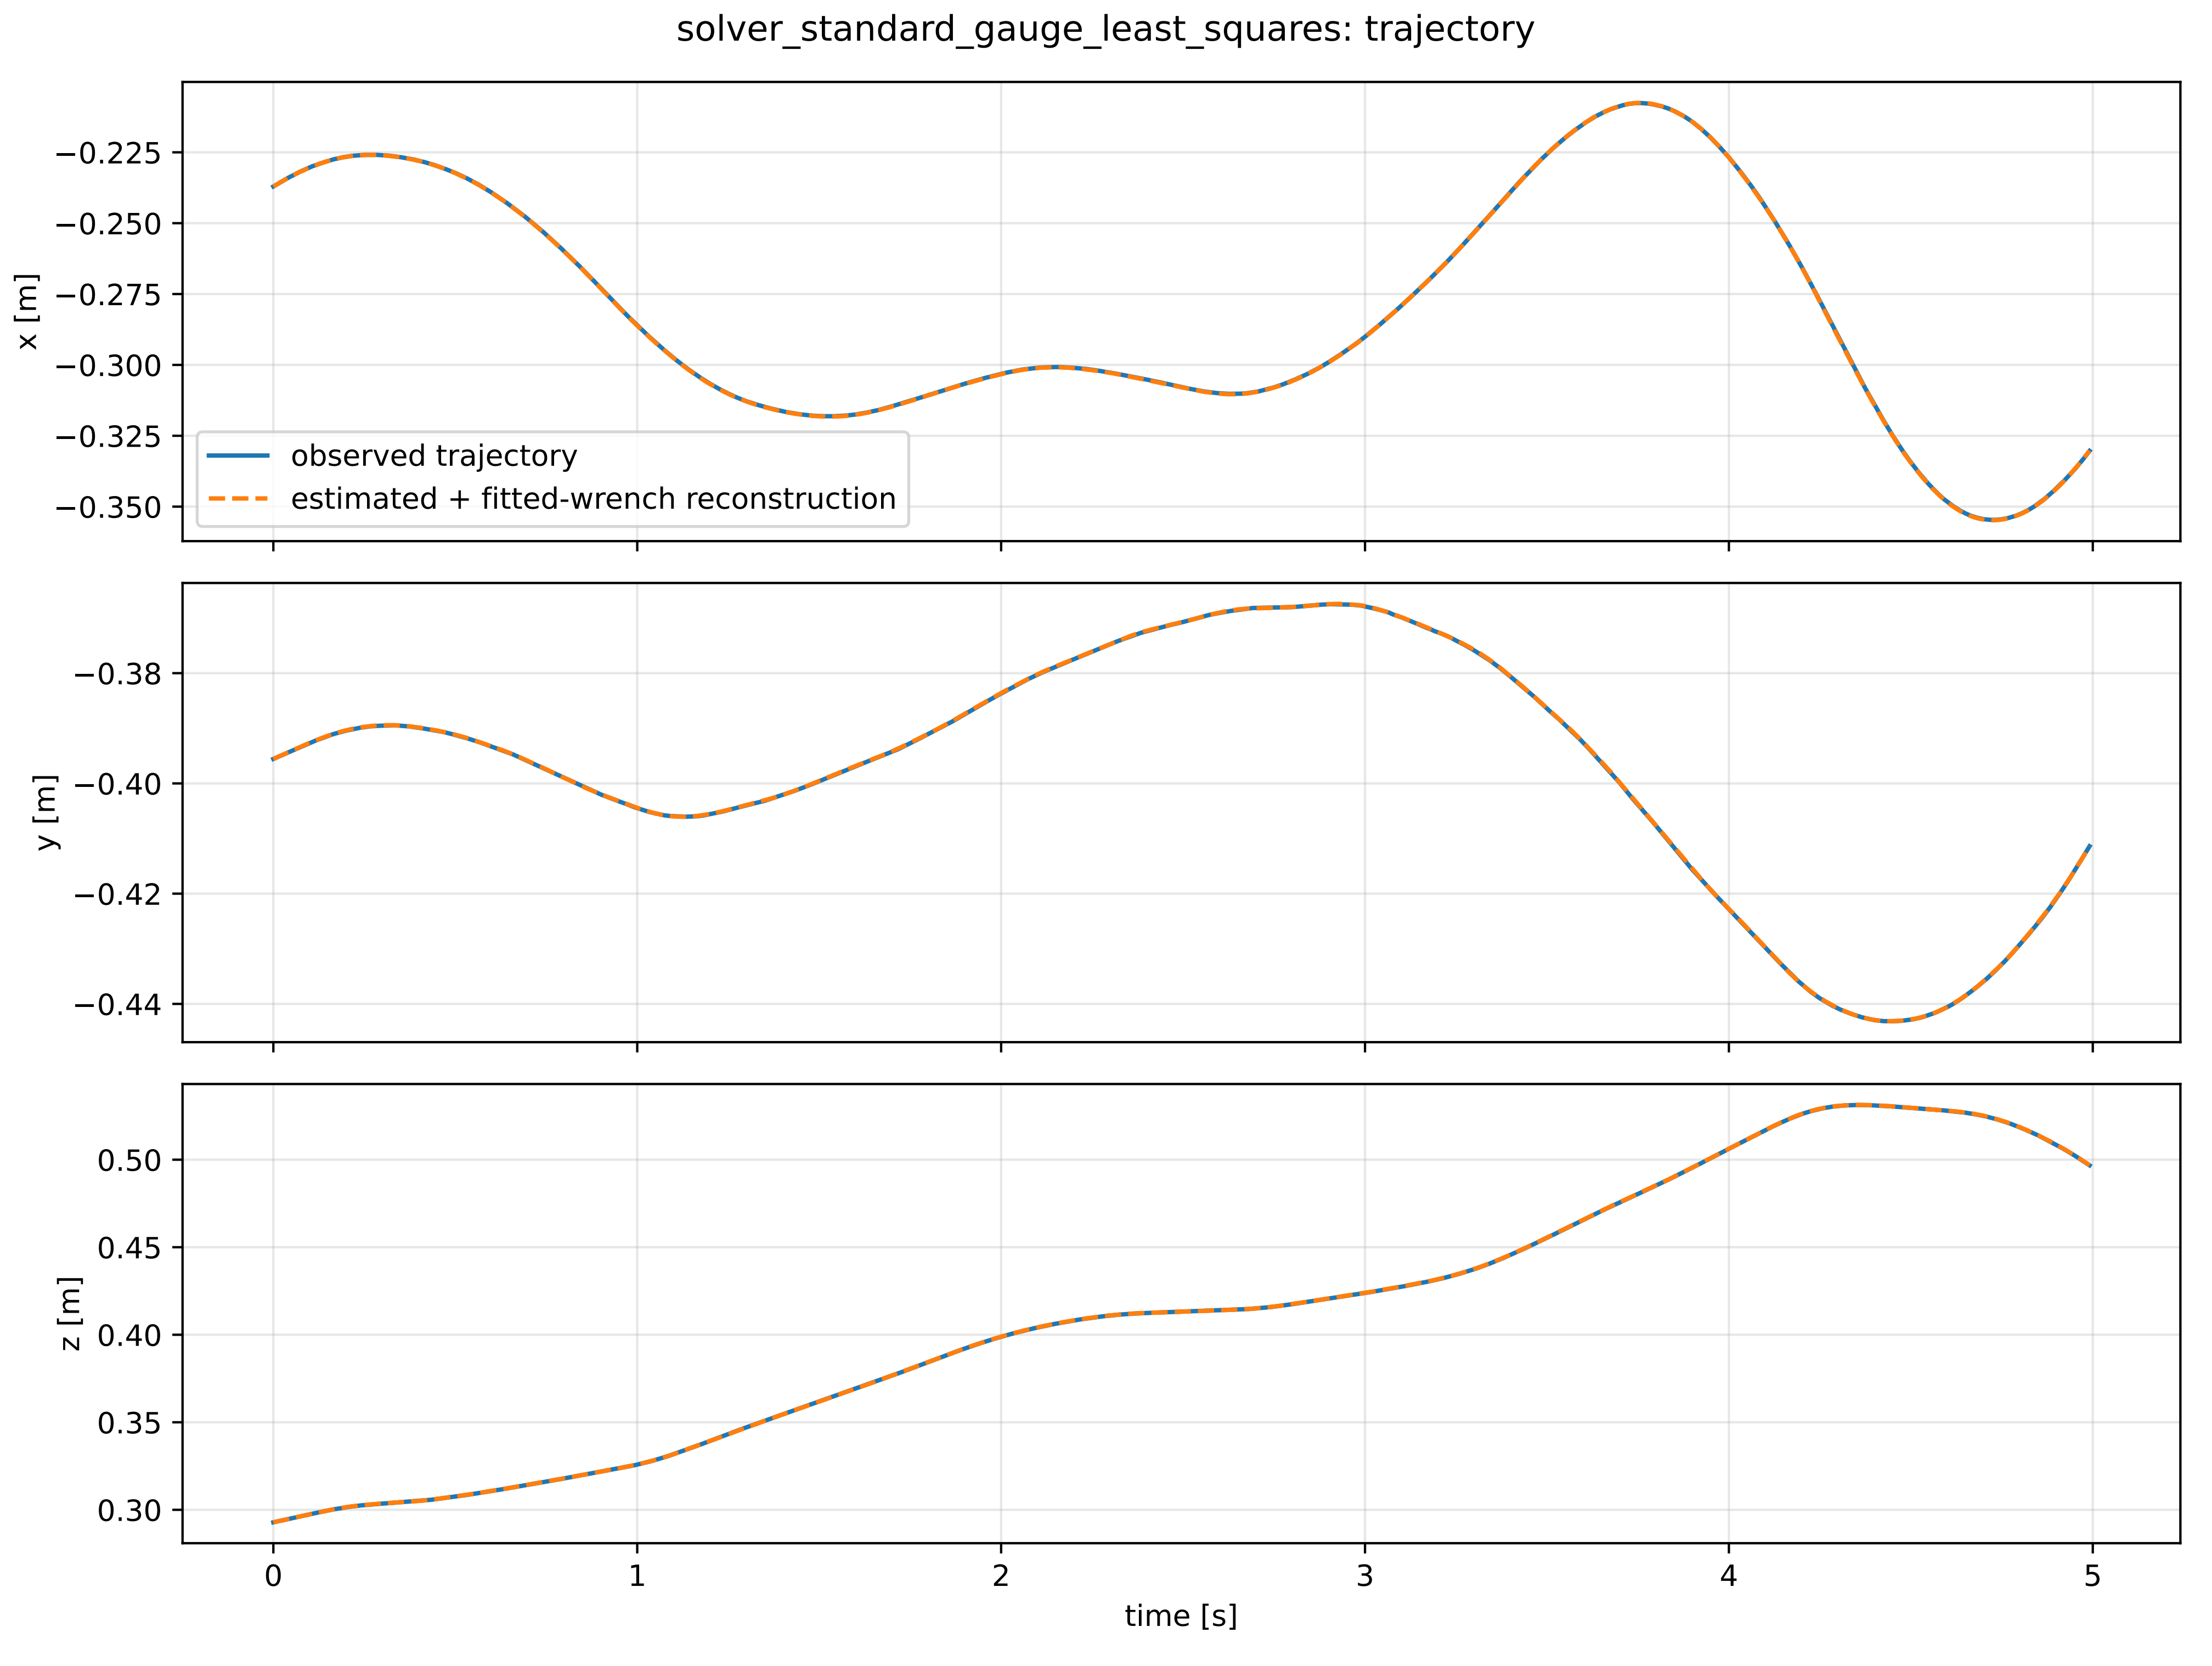
solver_standard_gauge_least_squares: trajectory
x [m]
−0.225
−0.250
−0.275
−0.300
−0.325
−0.350
observed trajectory
estimated + fitted-wrench reconstruction
y [m]
−0.38
−0.40
−0.42
−0.44
z [m]
0.50
0.45
0.40
0.35
0.30
0
1
2
3
4
5
time [s]

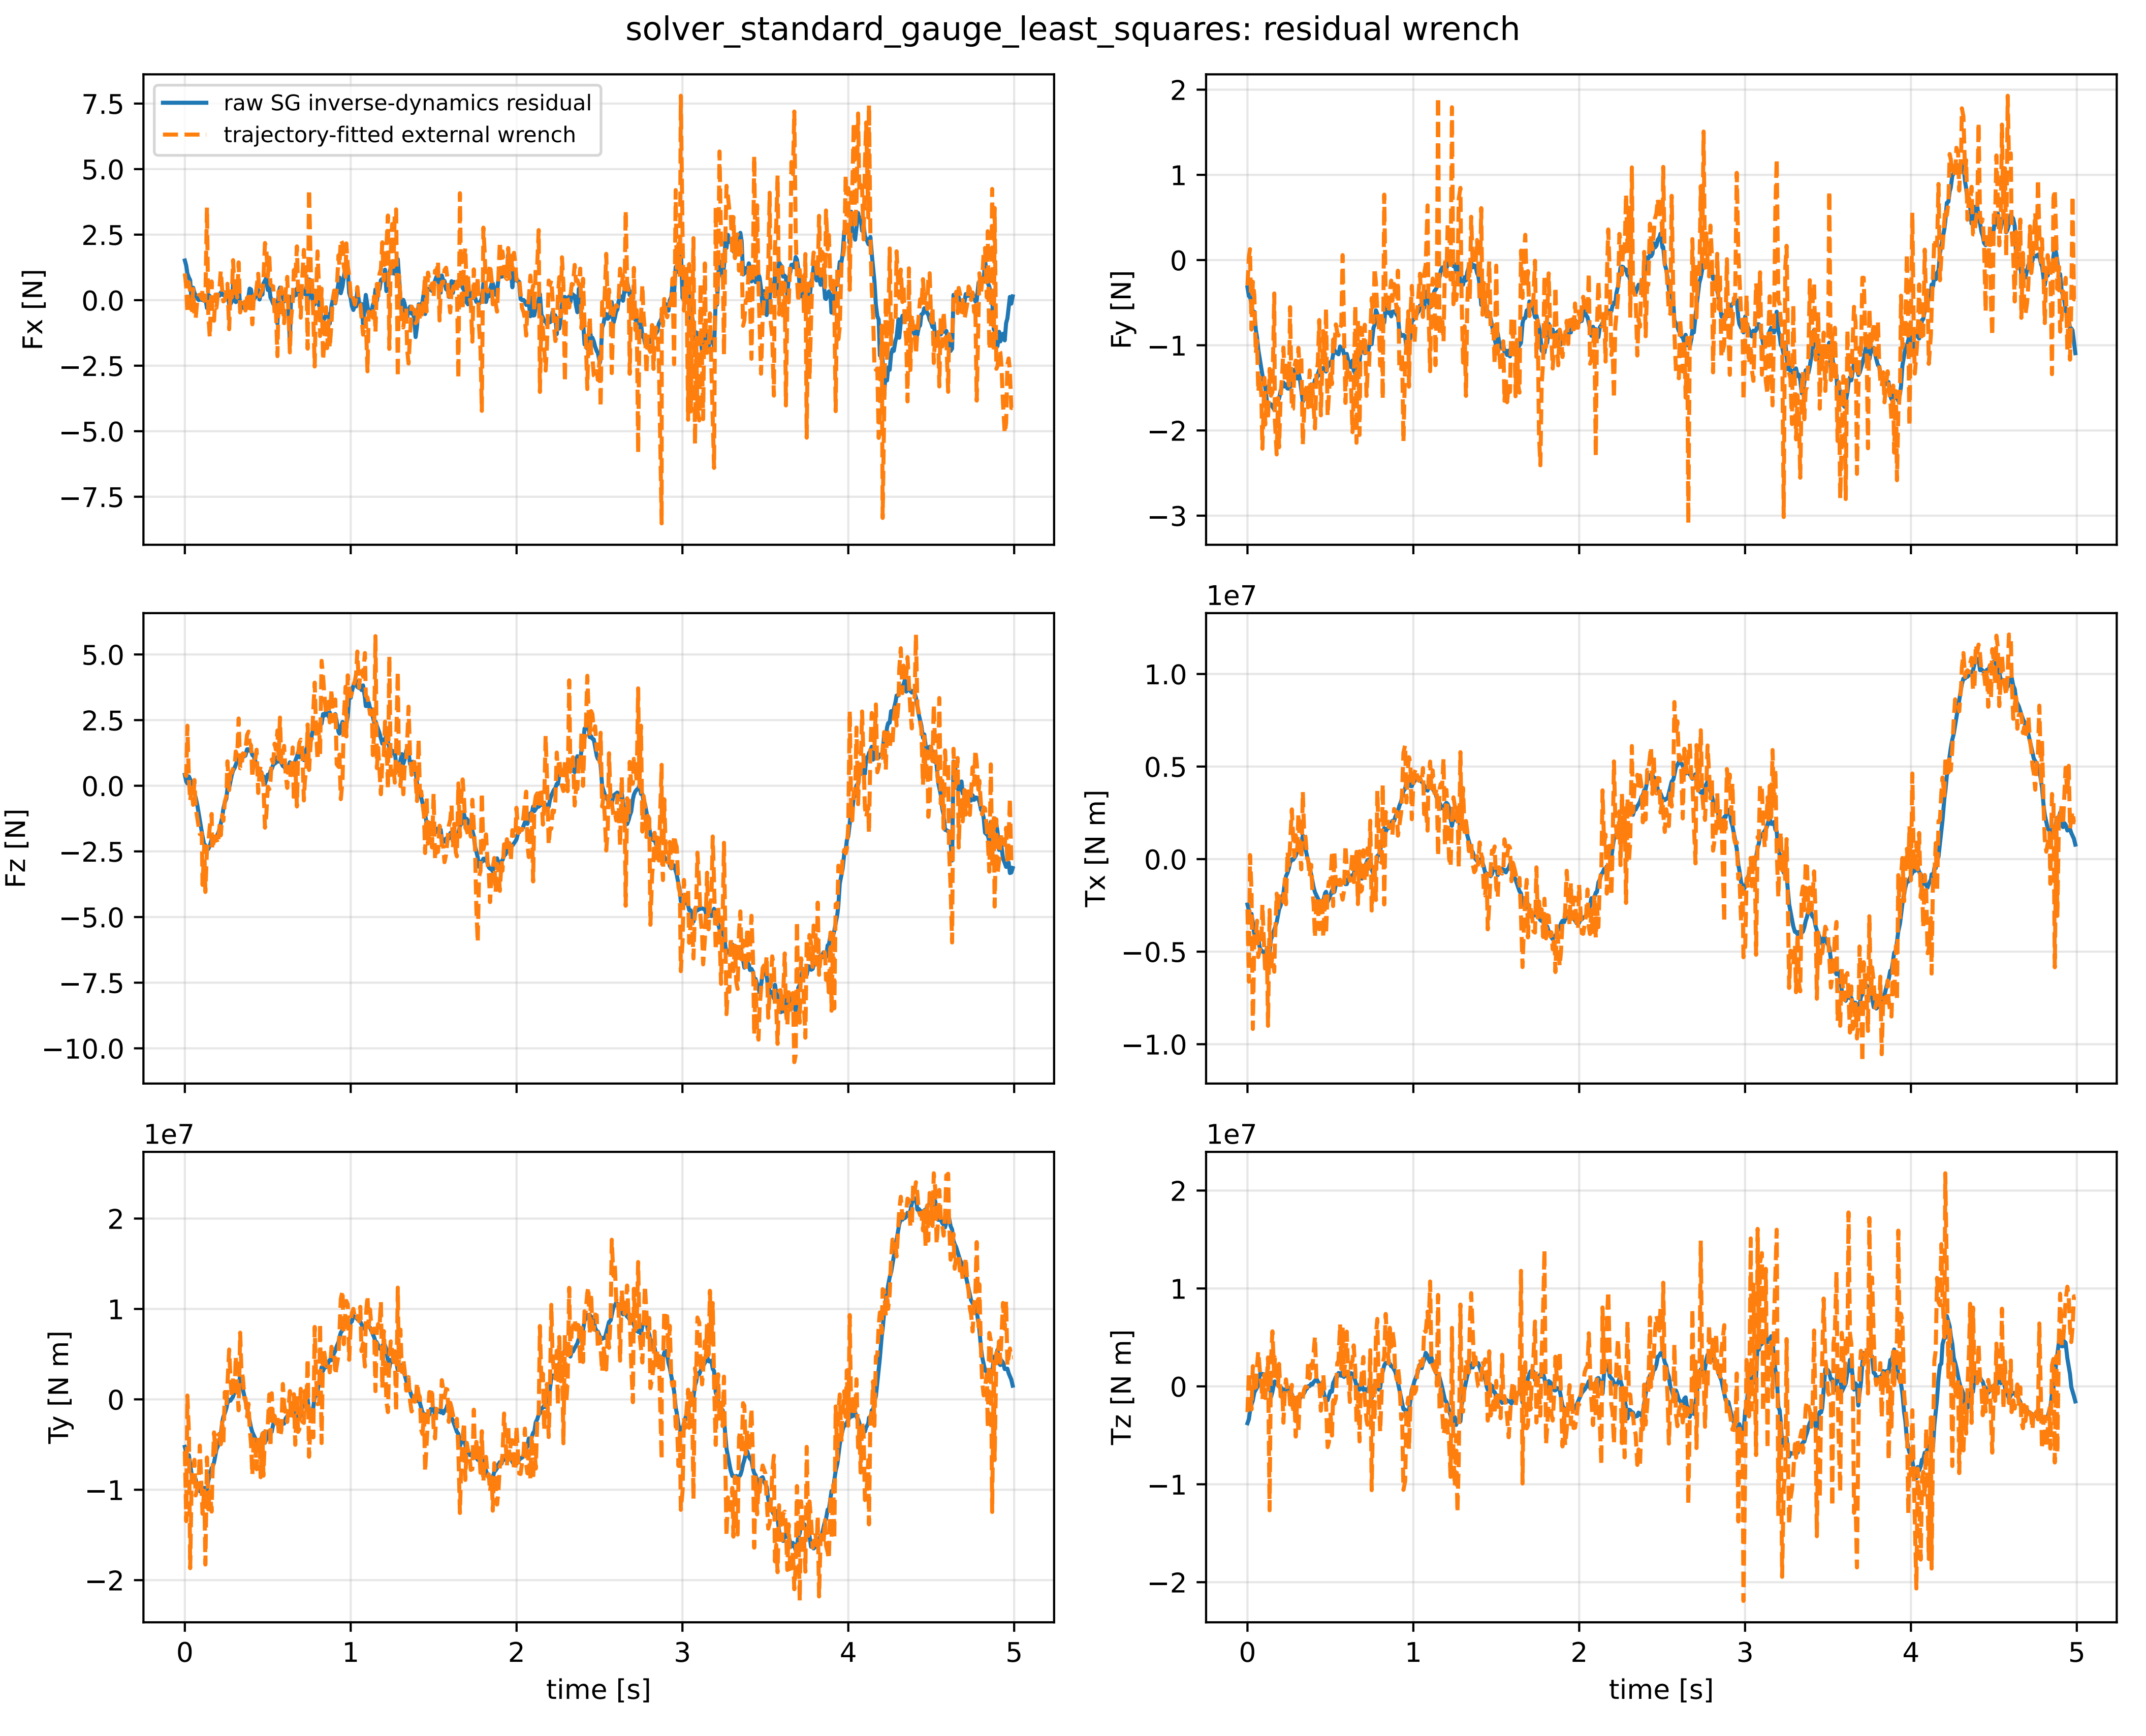

solver_standard_gauge_least_squares: residual wrench
raw SG inverse-dynamics residual
trajectory-fitted external wrench
Fx [N]
Fy [N]
Fz [N]
Tx [N m]
Ty [N m]
Tz [N m]
1e7
time [s]

solver_standard_gauge_least_squares: measured sensor comparison

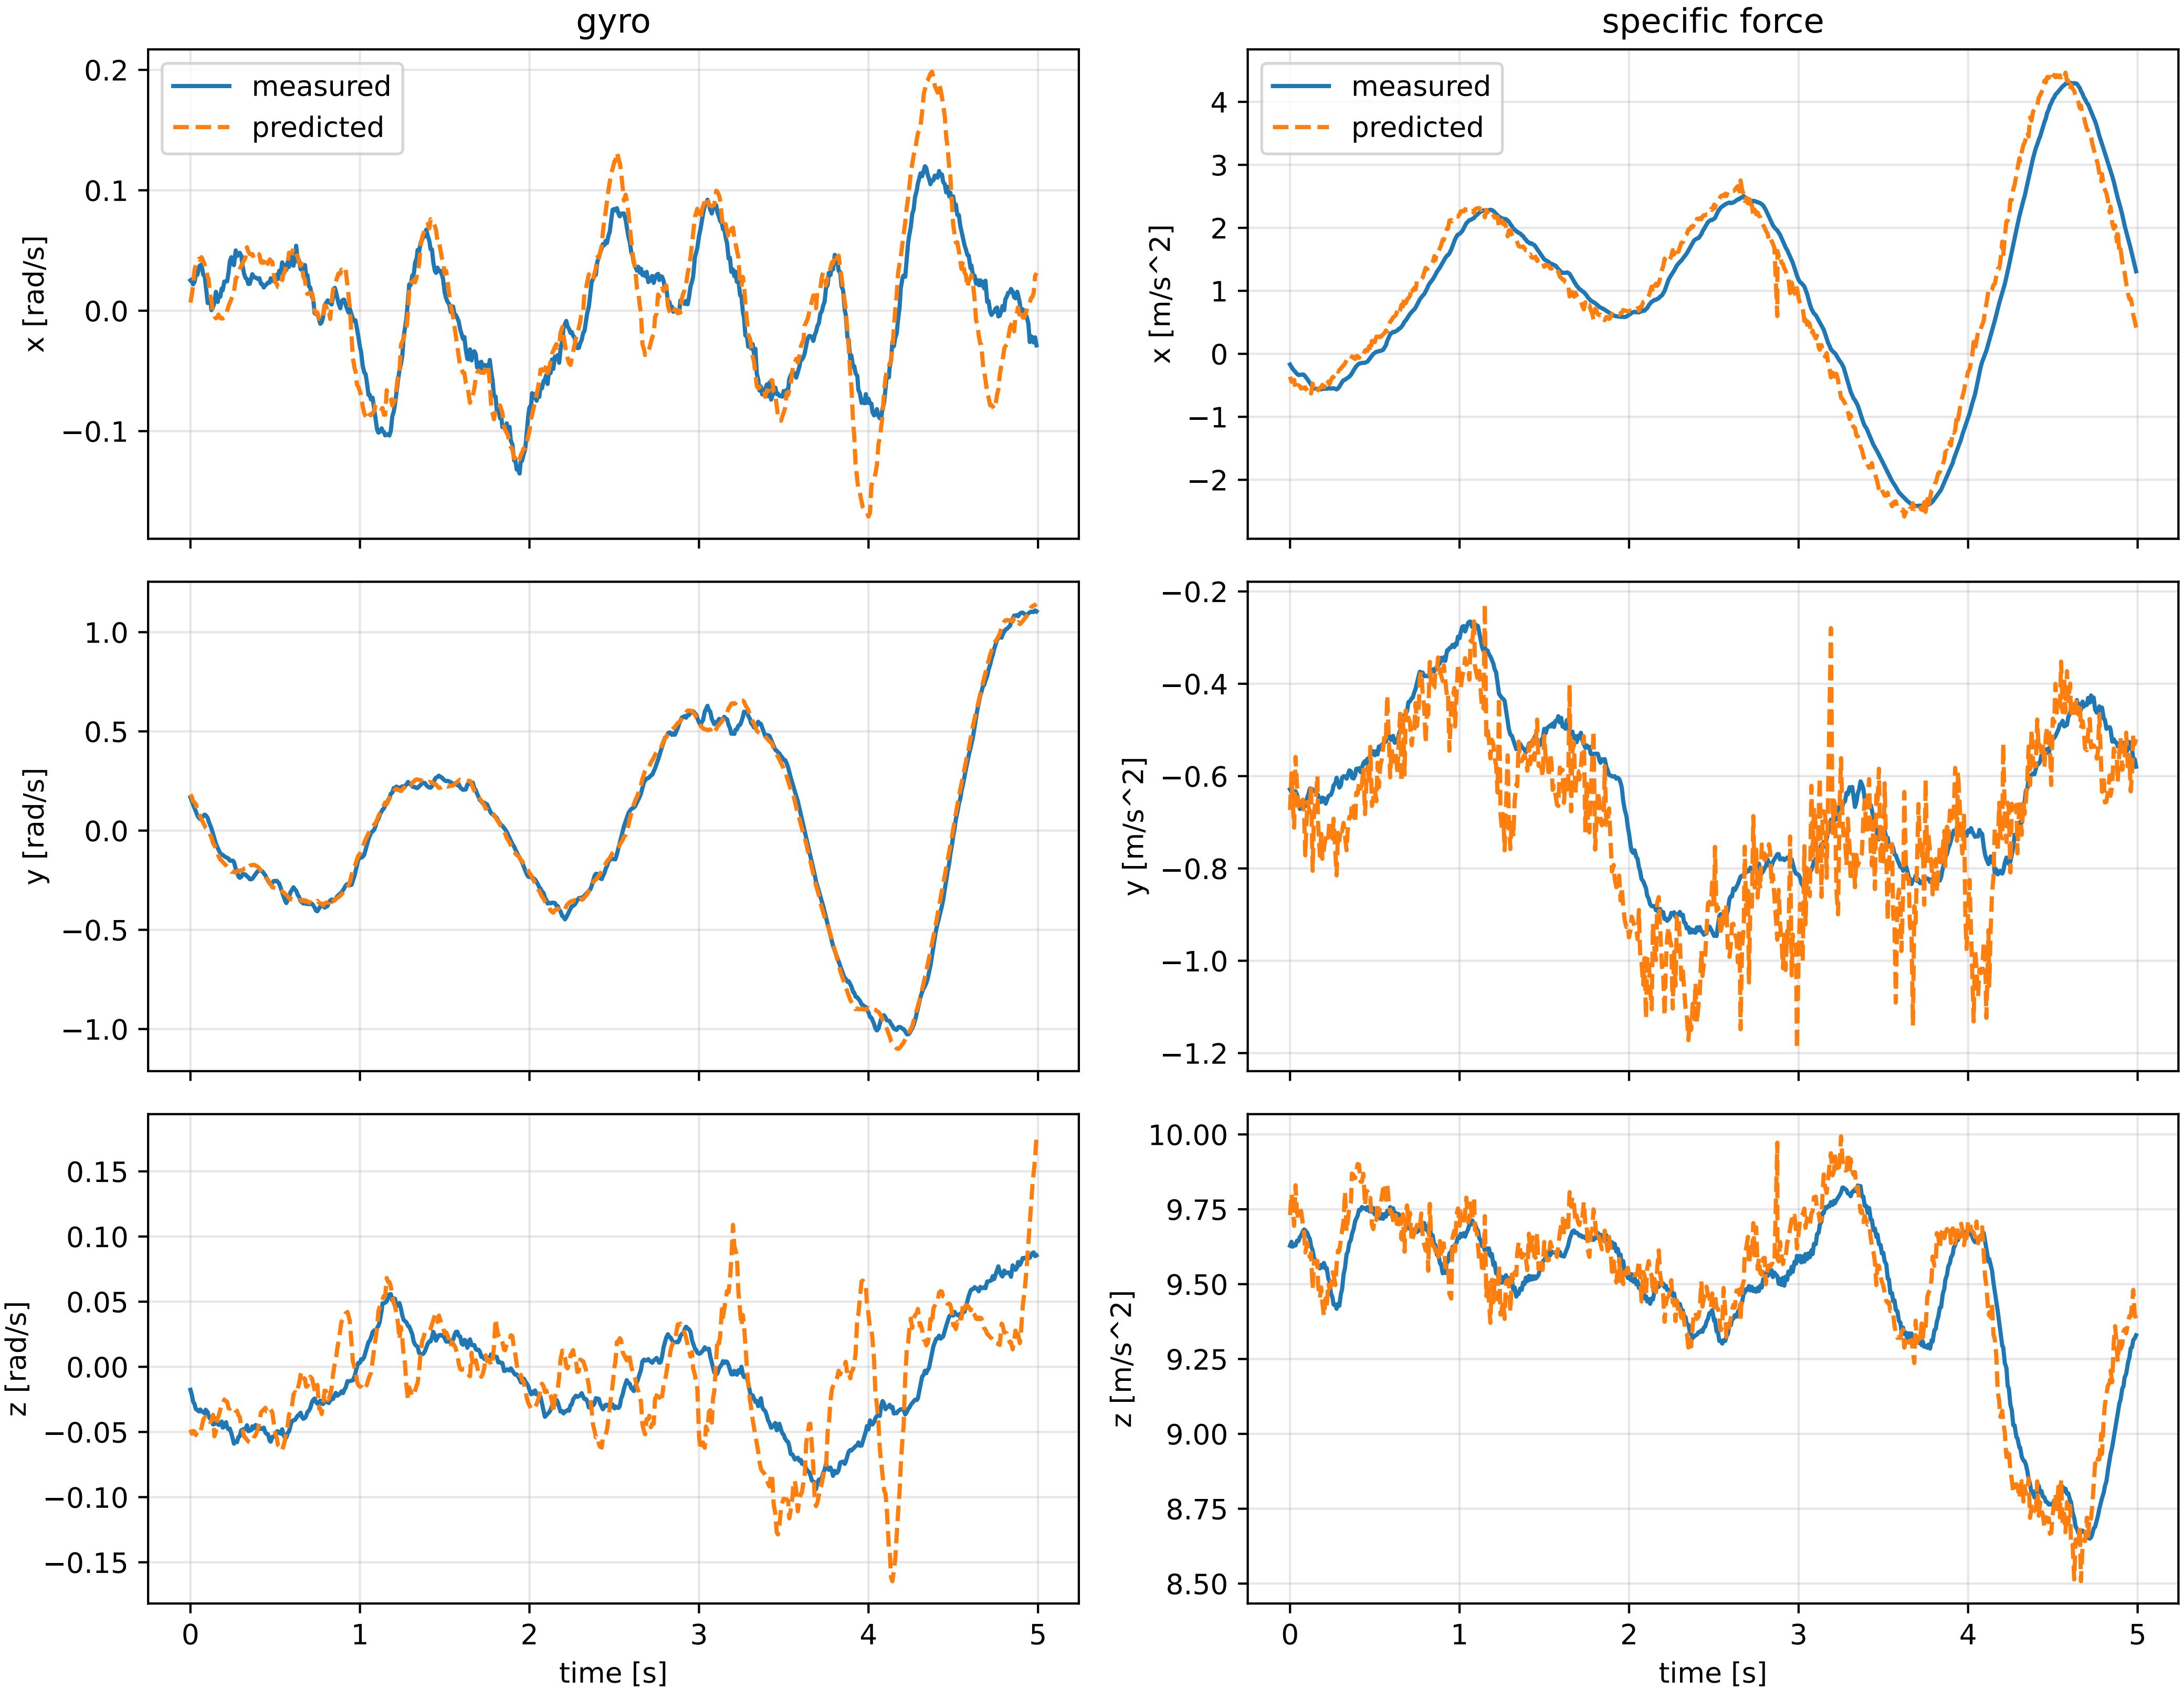

solver_standard_gauge_least_squares: nominal -> estimated parameters

```
Case: solver_standard_gauge_least_squares
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  7.63213958   delta  5.28054199

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [1197623.4536642 2445098.4196592 -151427.3509841]   d=[1197623.3886642 24
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [2445098.4196592 5015697.686501    73886.56152  ]   d=[2445098.4196599 50
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-151427.3509841   73886.56152   6204169.3319262]   d=[-151427.3510031   738

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-0.0890368  0.2010068 -0.0259751]   d=[-0.0870121  0.201037
rotor force effectiveness
  [1. 1. 1. 1.] -> [2.2878436e-07 3.3279613e+00 5.7152954e+00 2.3712013e+00]   d=[-0.9999998  2.3279613  4.7152954  1.371201

rotor lag [s]  0.103122751
gimbal lag [s]  0.040363108
```