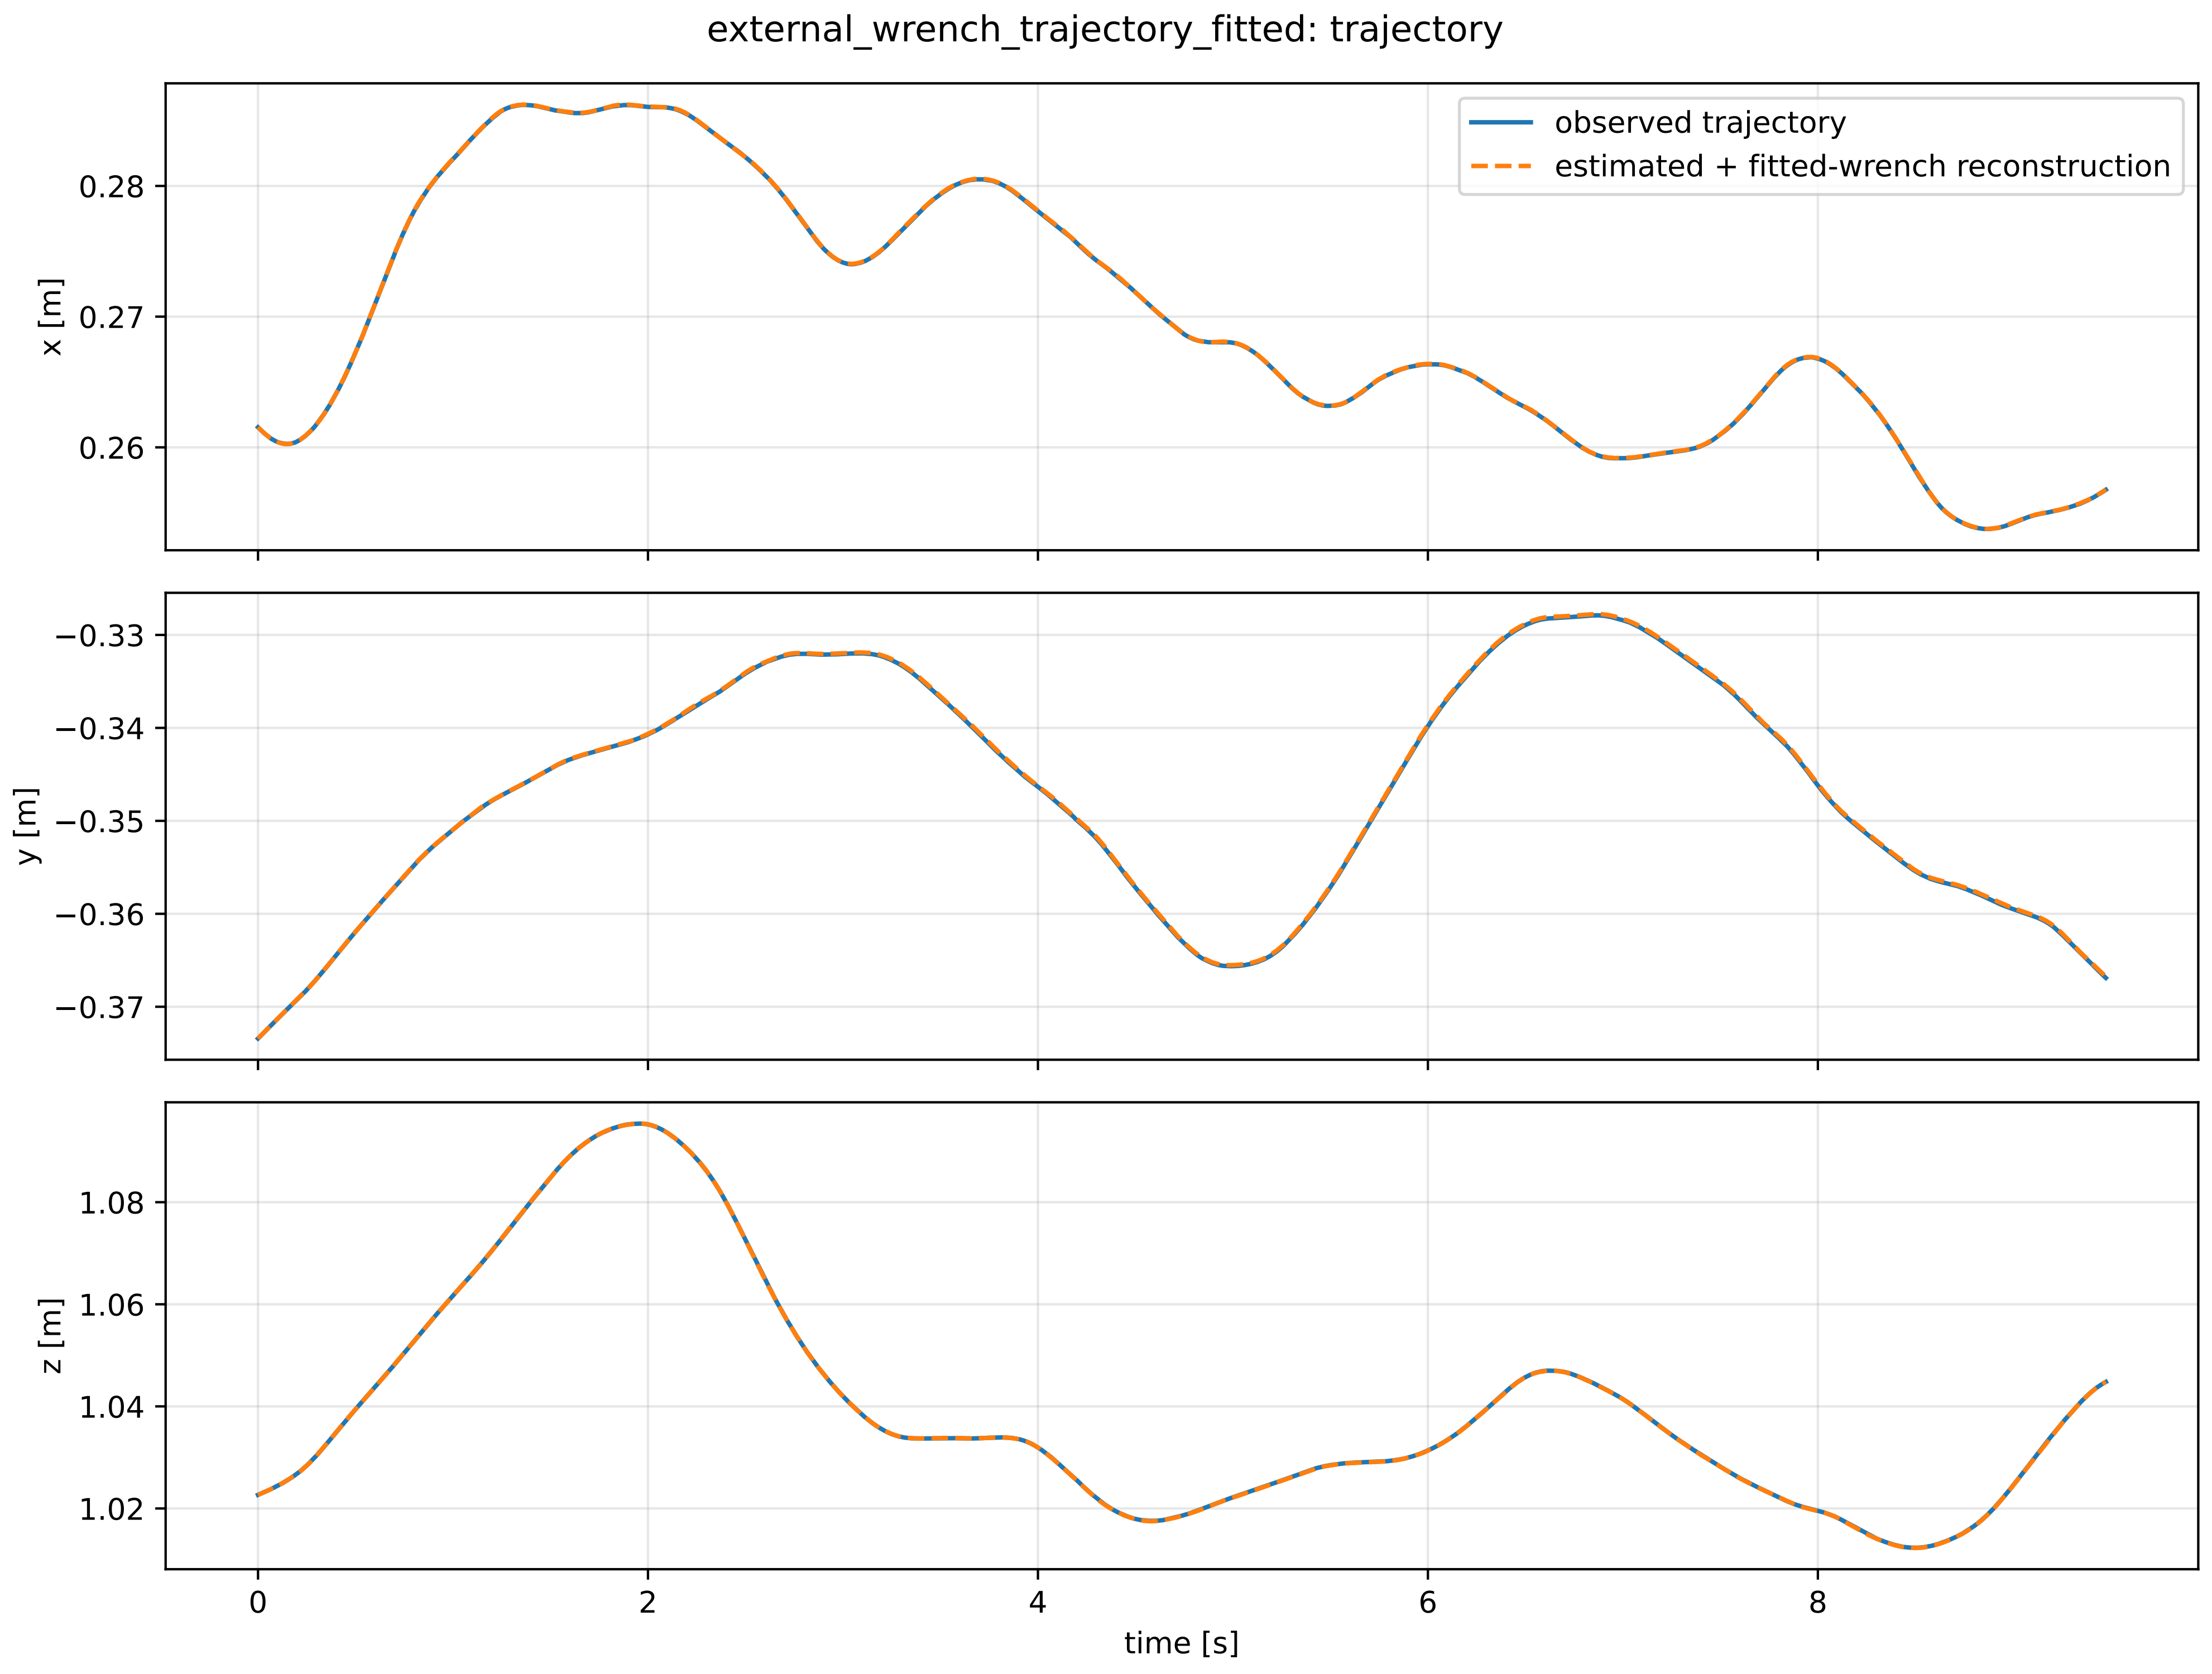
external_wrench_trajectory_fitted: trajectory
observed trajectory
estimated + fitted-wrench reconstruction
x [m]
0.28
0.27
0.26
y [m]
−0.33
−0.34
−0.35
−0.36
−0.37
z [m]
1.08
1.06
1.04
1.02
0
2
4
6
8
time [s]

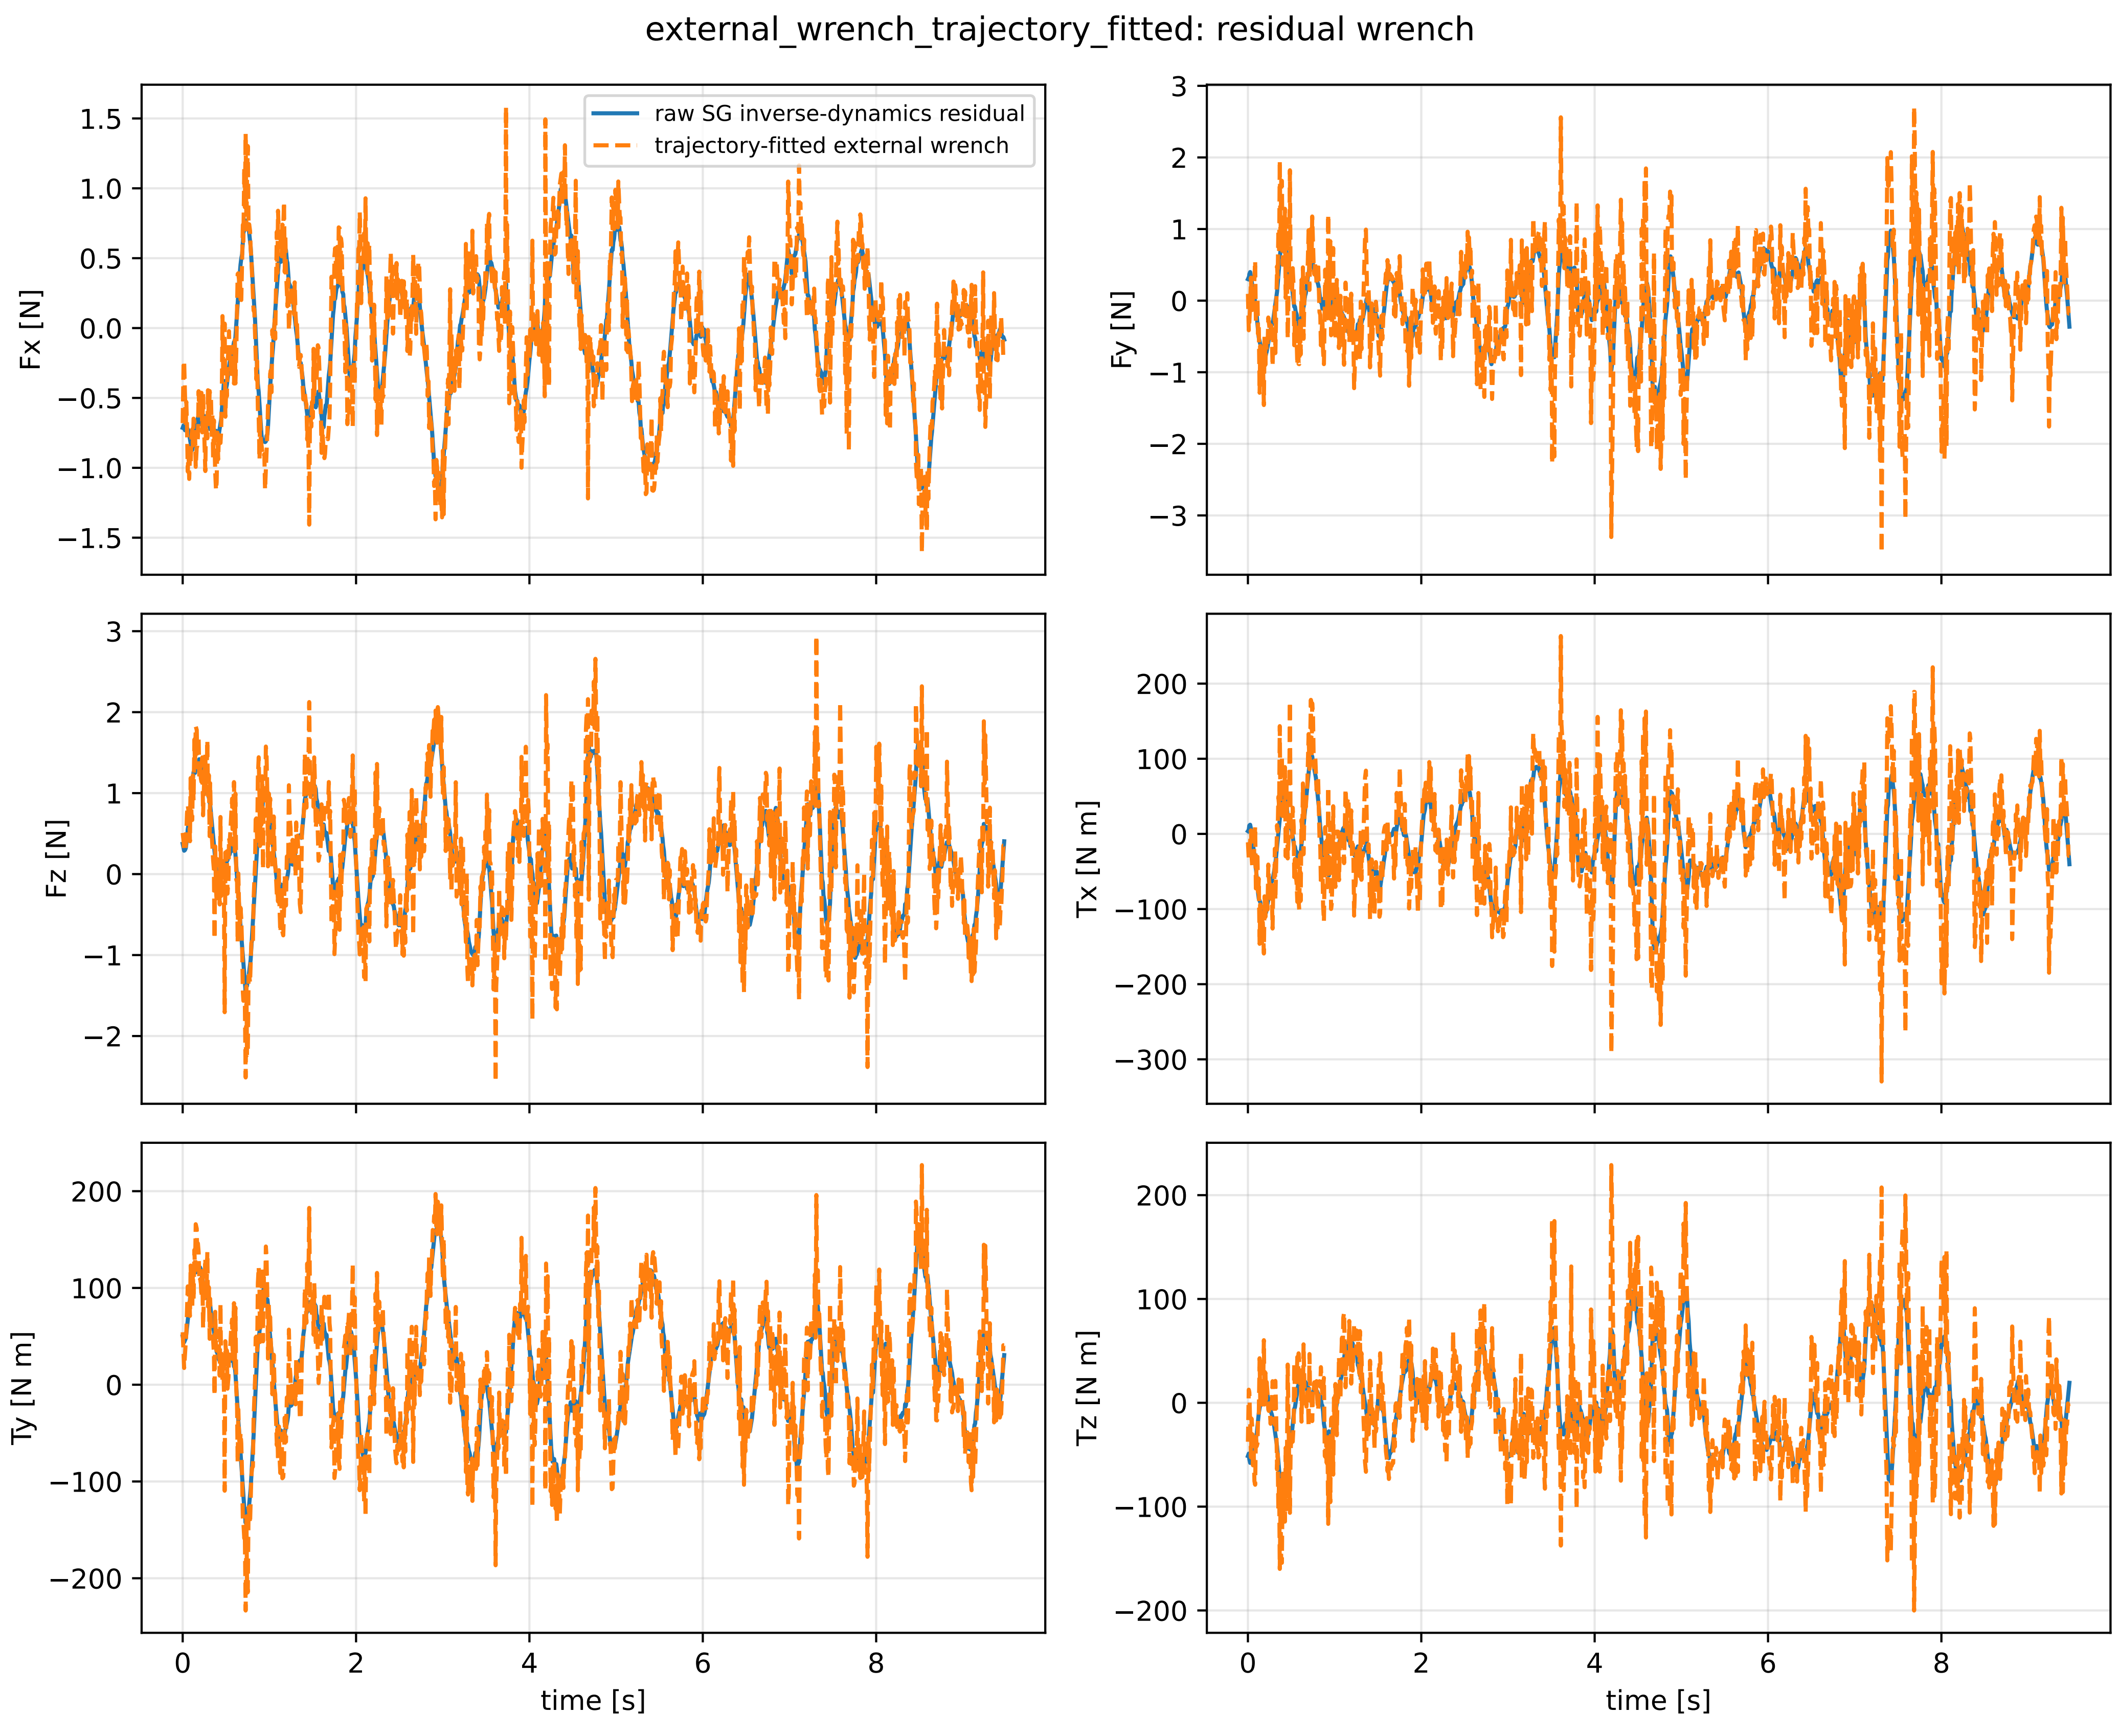
external_wrench_trajectory_fitted: residual wrench
raw SG inverse-dynamics residual
trajectory-fitted external wrench
Fx [N]
Fy [N]
Fz [N]
Tx [N m]
Ty [N m]
Tz [N m]
time [s]
time [s]

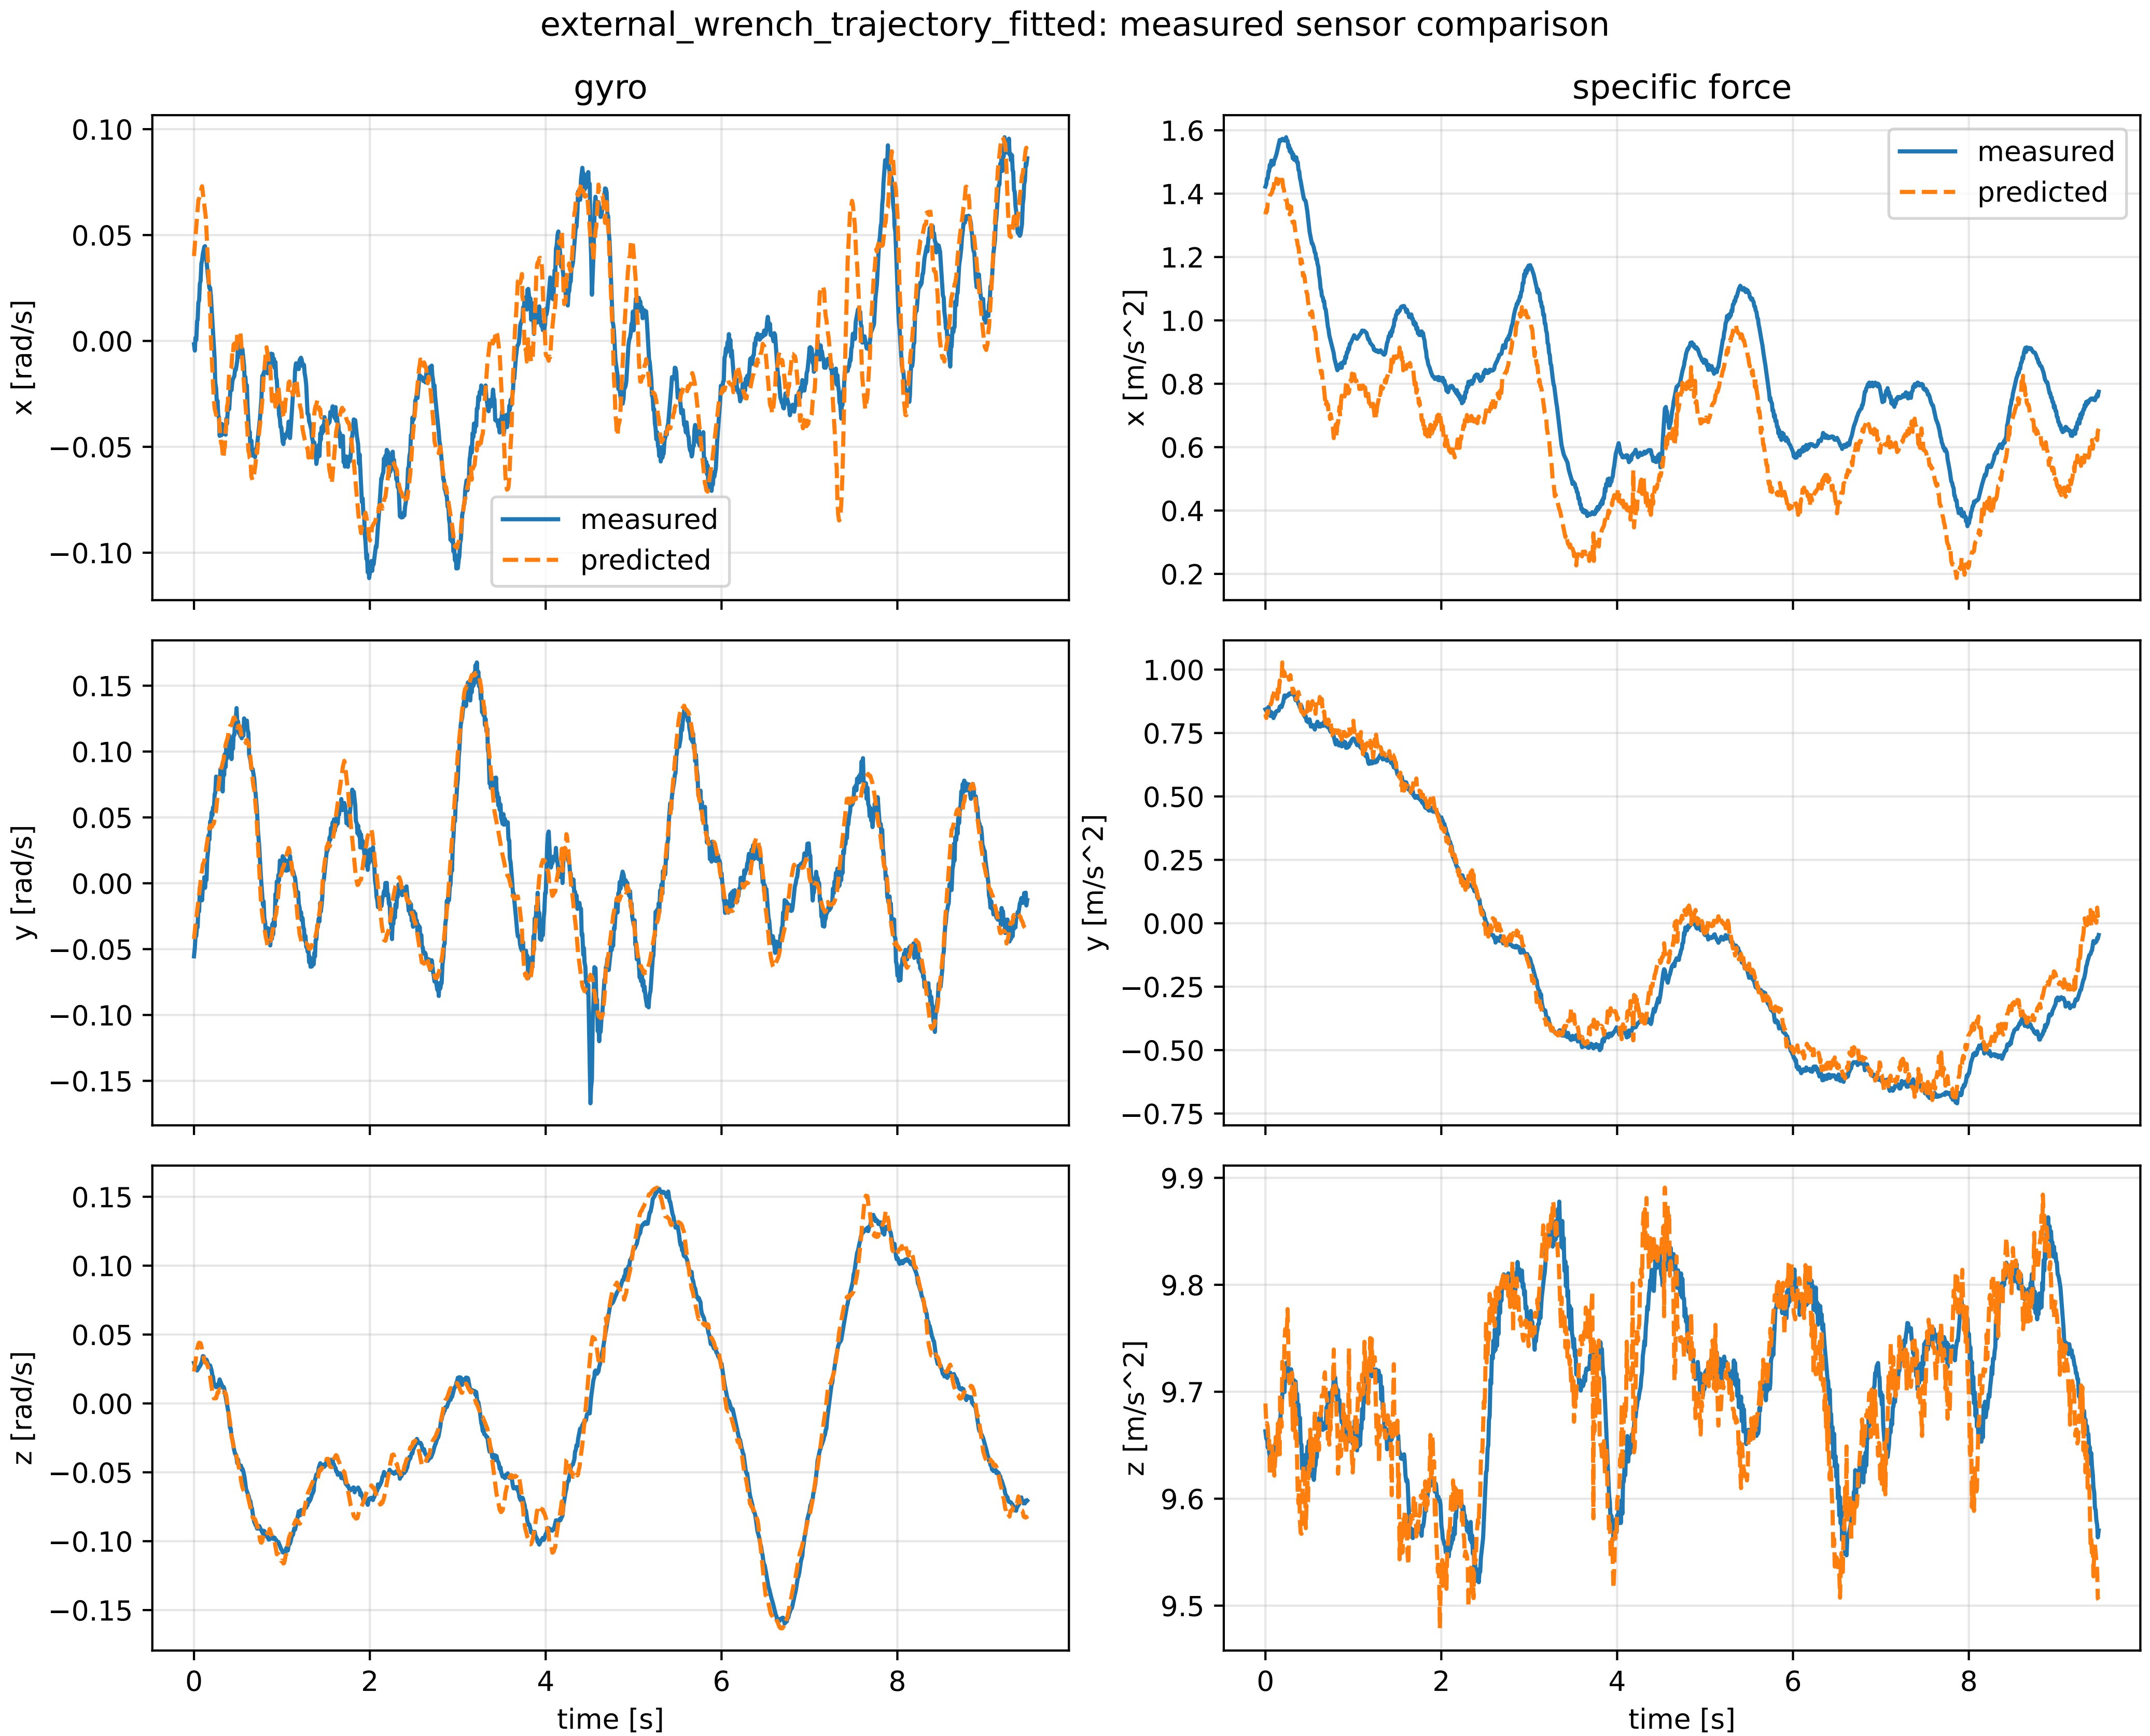

external_wrench_trajectory_fitted: measured sensor comparison
gyro
specific force
x [rad/s]
y [rad/s]
z [rad/s]
x [m/s^2]
y [m/s^2]
z [m/s^2]
measured
predicted
time [s]

external_wrench_trajectory_fitted: nominal -> estimated parameters

```
Case: external_wrench_trajectory_fitted
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  1.07795273   delta -1.27364486

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [117.1072837 -69.5380588 -73.781295 ]   d=[117.0422836 -69.5380581 -73.78
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [-69.5380588 149.8375074 -58.3750882]   d=[-69.5380581 149.7725547 -58.37
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-73.781295  -58.3750882 142.939362 ]   d=[-73.781314  -58.3750883 142.8103

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-1.3324326 -0.9585076 -1.1045125]   d=[-1.3304079 -0.958477
rotor force effectiveness
  [1. 1. 1. 1.] -> [0.232759  0.2460669 0.4124717 0.5627114]   d=[-0.767241  -0.7539331 -0.5875283 -0.4372886]

rotor lag [s]  0.199999857
gimbal lag [s]  0.0503390711
```