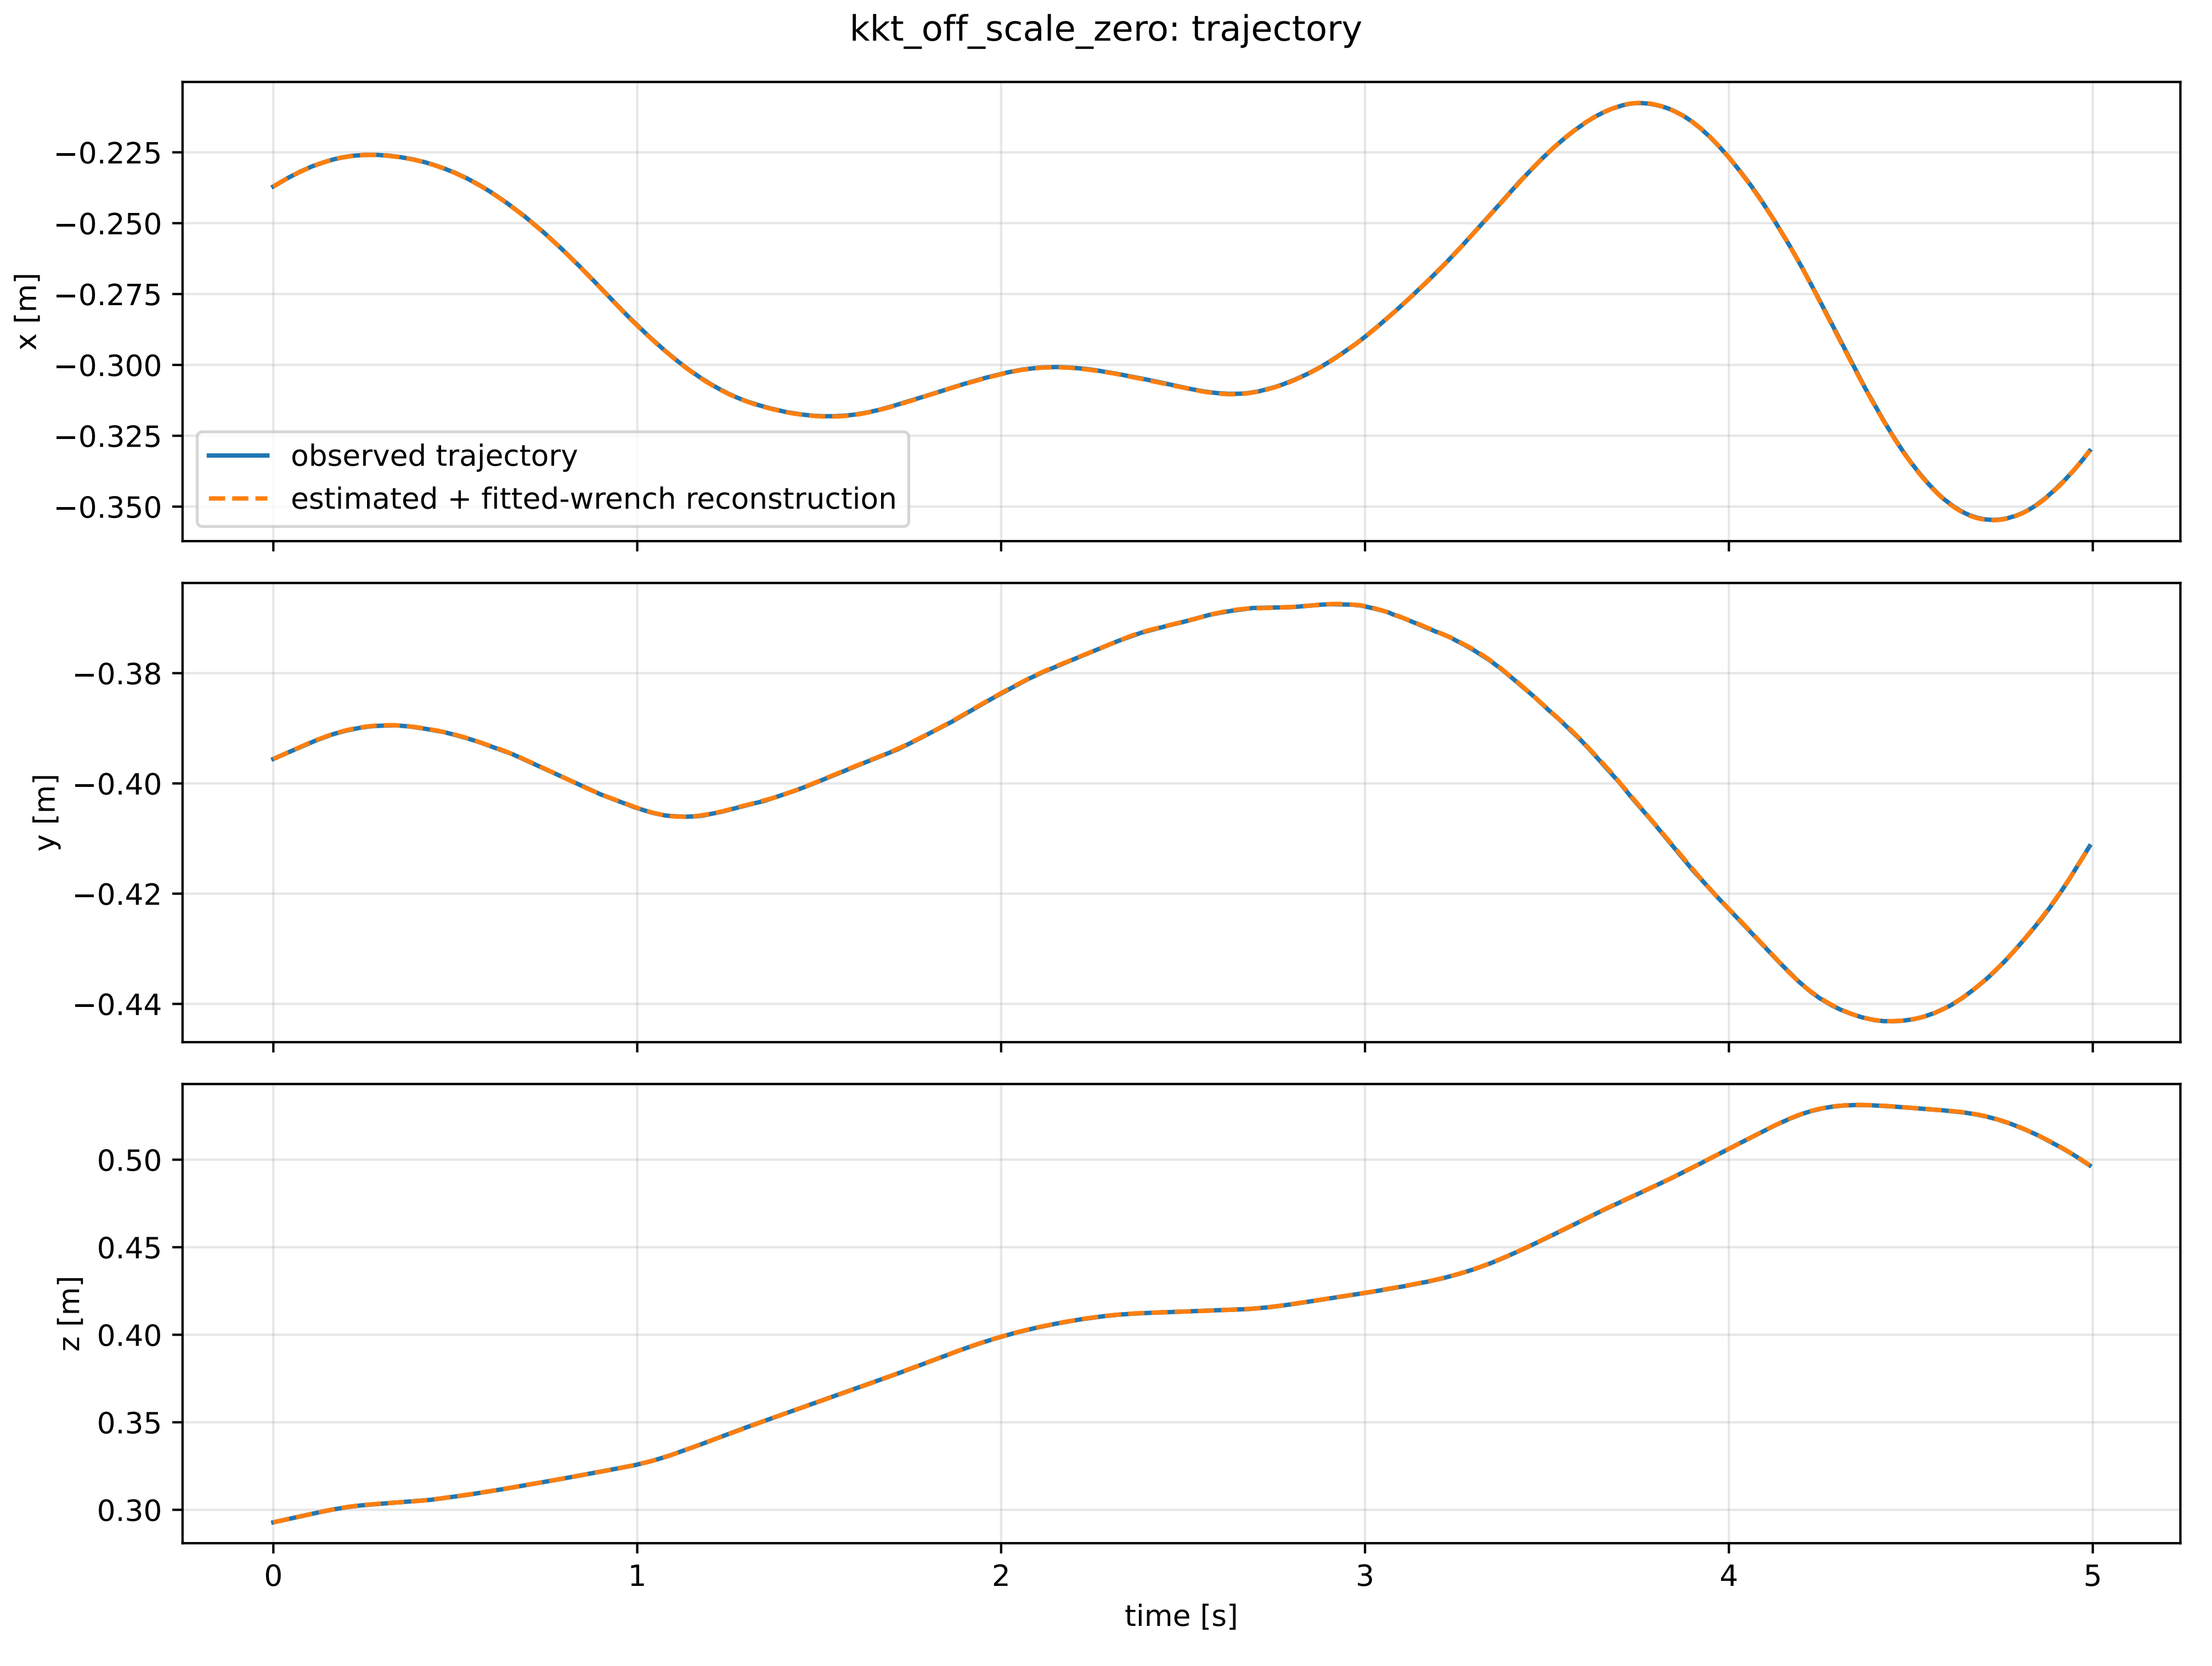

kkt_off_scale_zero: trajectory
−0.225
−0.250
−0.275
−0.300
−0.325
−0.350
x [m]
observed trajectory
estimated + fitted-wrench reconstruction
−0.38
−0.40
−0.42
−0.44
y [m]
0.50
0.45
0.40
0.35
0.30
z [m]
0
1
2
3
4
5
time [s]

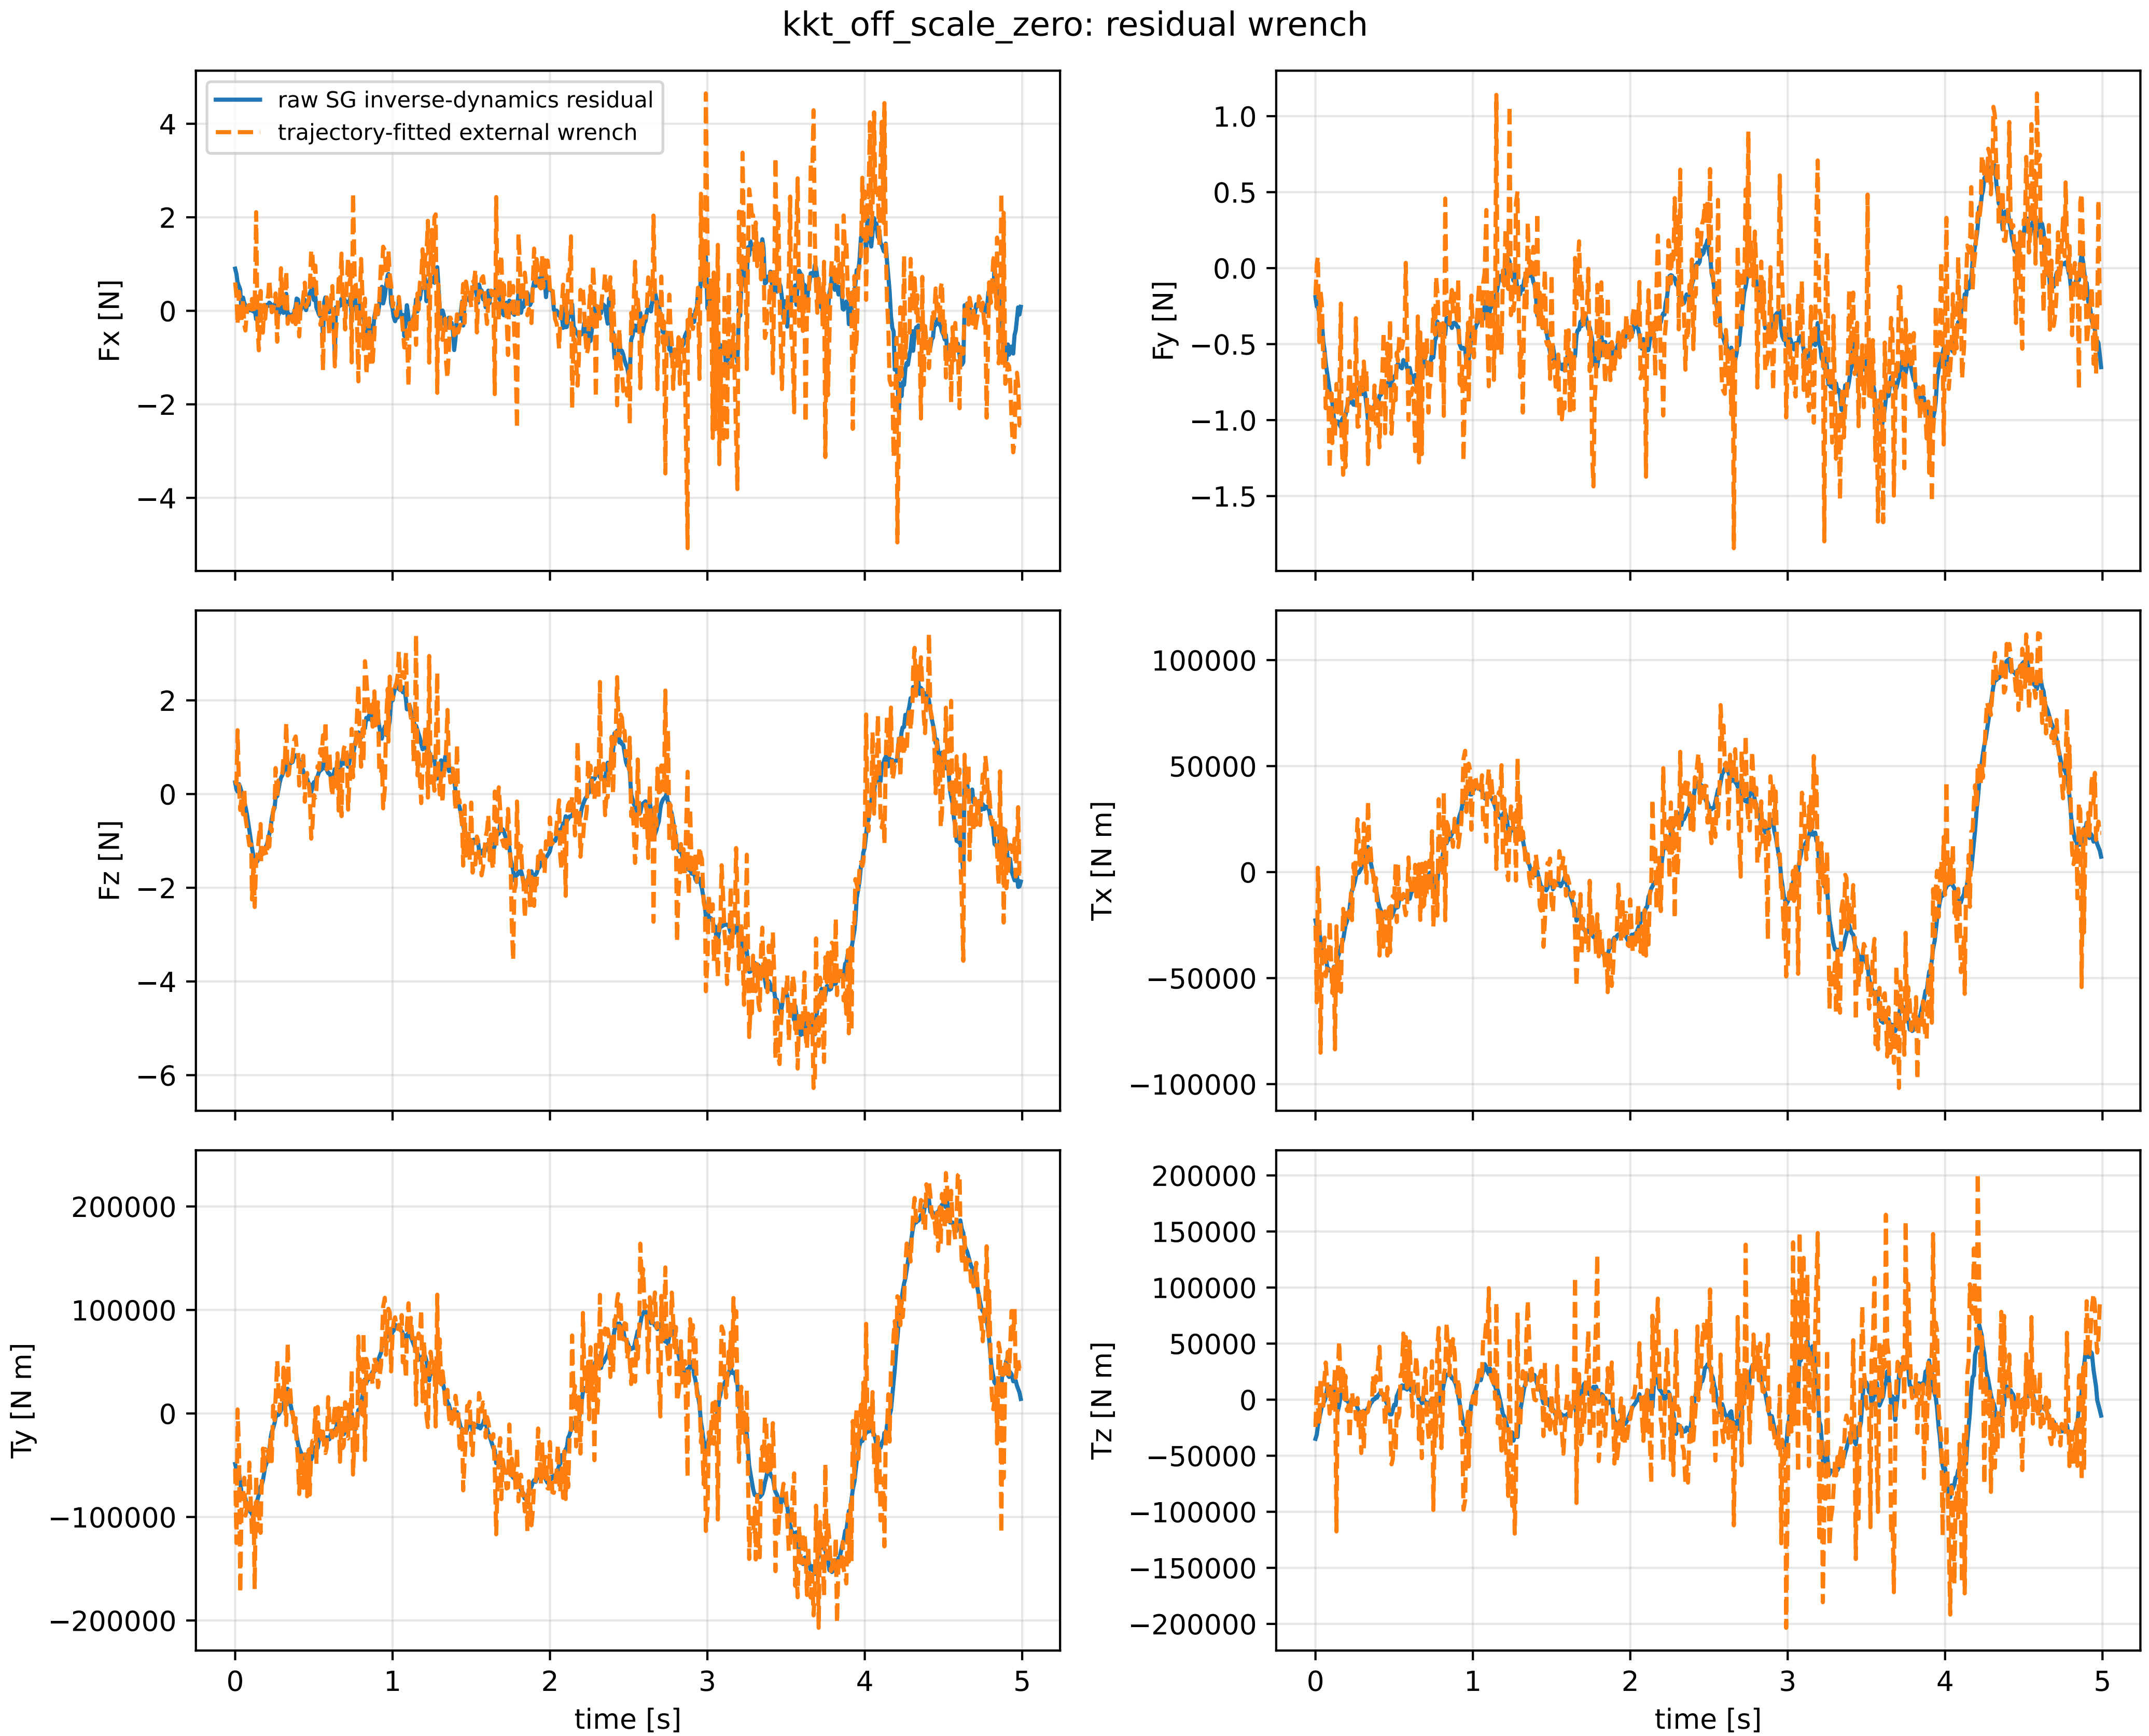
kkt_off_scale_zero: residual wrench
raw SG inverse-dynamics residual
trajectory-fitted external wrench
Fx [N]
Fy [N]
Fz [N]
Tx [N m]
Ty [N m]
Tz [N m]
time [s]
time [s]

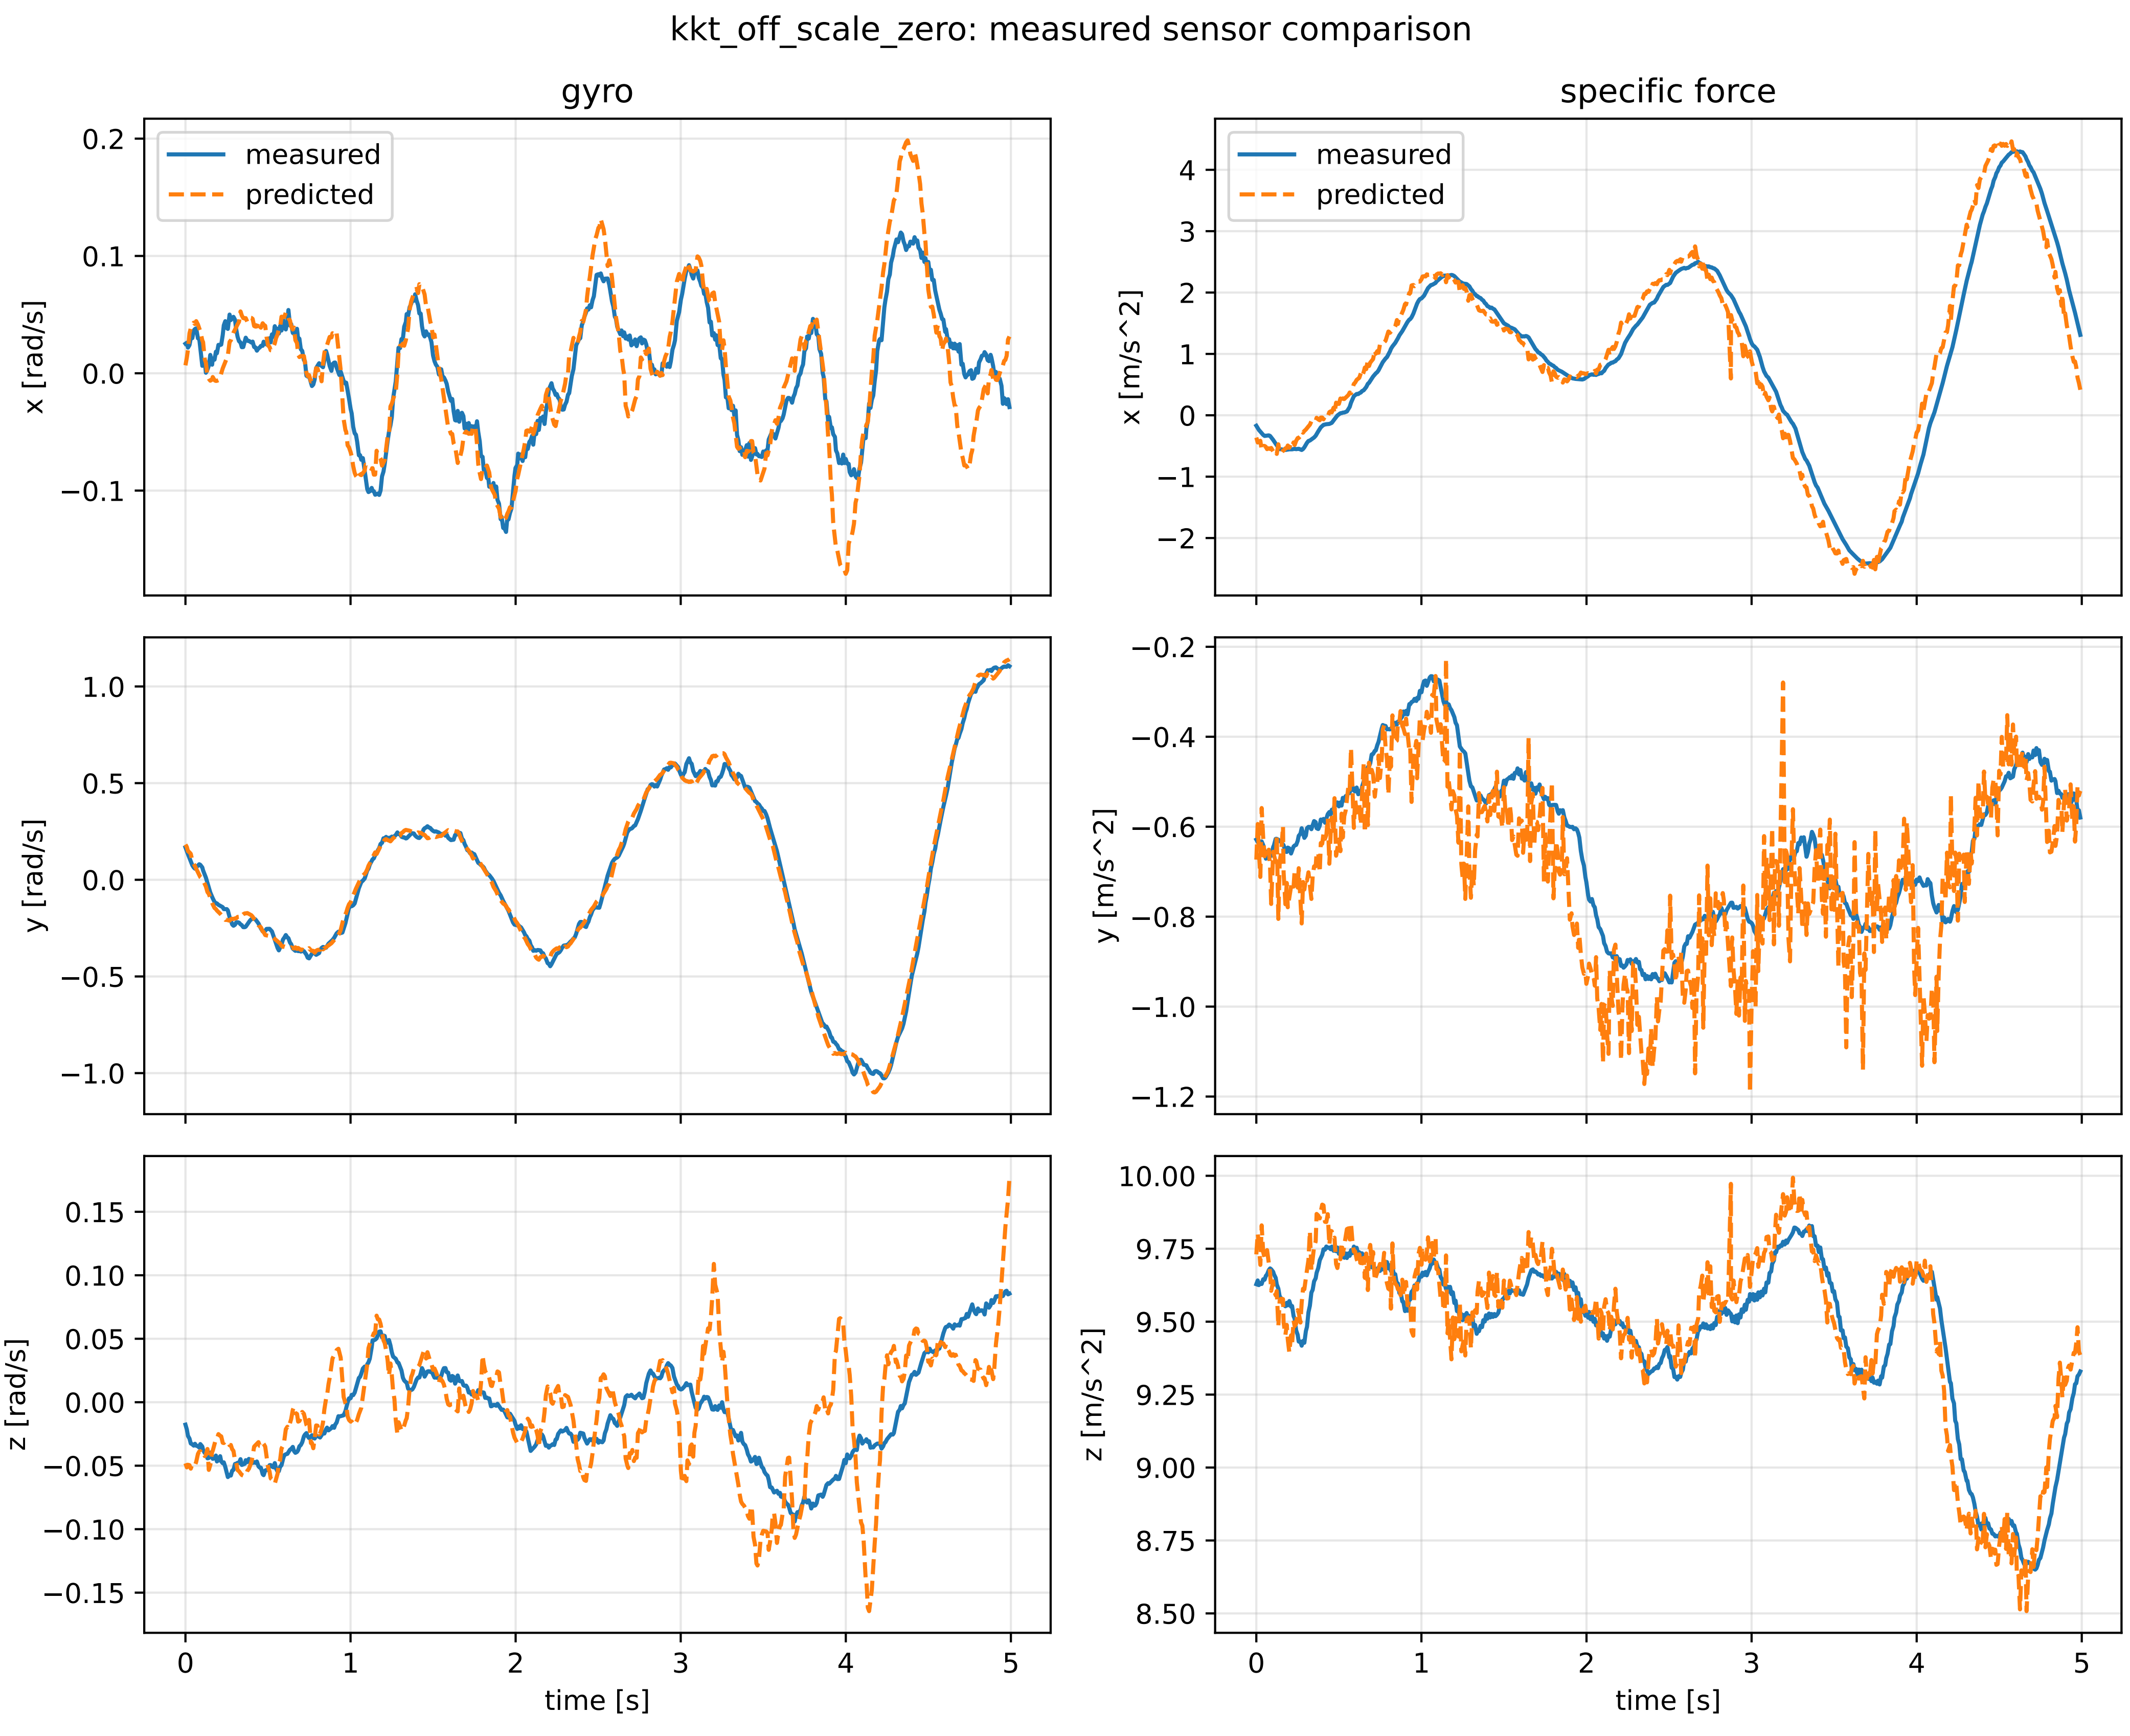

kkt_off_scale_zero: measured sensor comparison
gyro
specific force
measured
predicted
x [rad/s]
y [rad/s]
z [rad/s]
x [m/s^2]
y [m/s^2]
z [m/s^2]
time [s]

kkt_off_scale_zero: nominal -> estimated parameters

```
Case: kkt_off_scale_zero
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  4.54994368   delta  2.19834609

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [11117.0981568 22702.4361473 -1406.2160694]   d=[11117.0331567 22702.4361
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [22702.4361473 46581.6826446   685.9451451]   d=[22702.436148  46581.6176
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-1406.2160694   685.9451451 57613.7604414]   d=[-1406.2160884   685.945145

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-0.0889955  0.2009706 -0.0259699]   d=[-0.0869708  0.201001
rotor force effectiveness
  [1. 1. 1. 1.] -> [9.1074038e-06 1.9836083e+00 3.4071525e+00 1.4140041e+00]   d=[-0.9999909  0.9836083  2.4071525  0.414004

rotor lag [s]  0.103122845
gimbal lag [s]  0.0403628742
```