kkt_off_scale_positive: trajectory

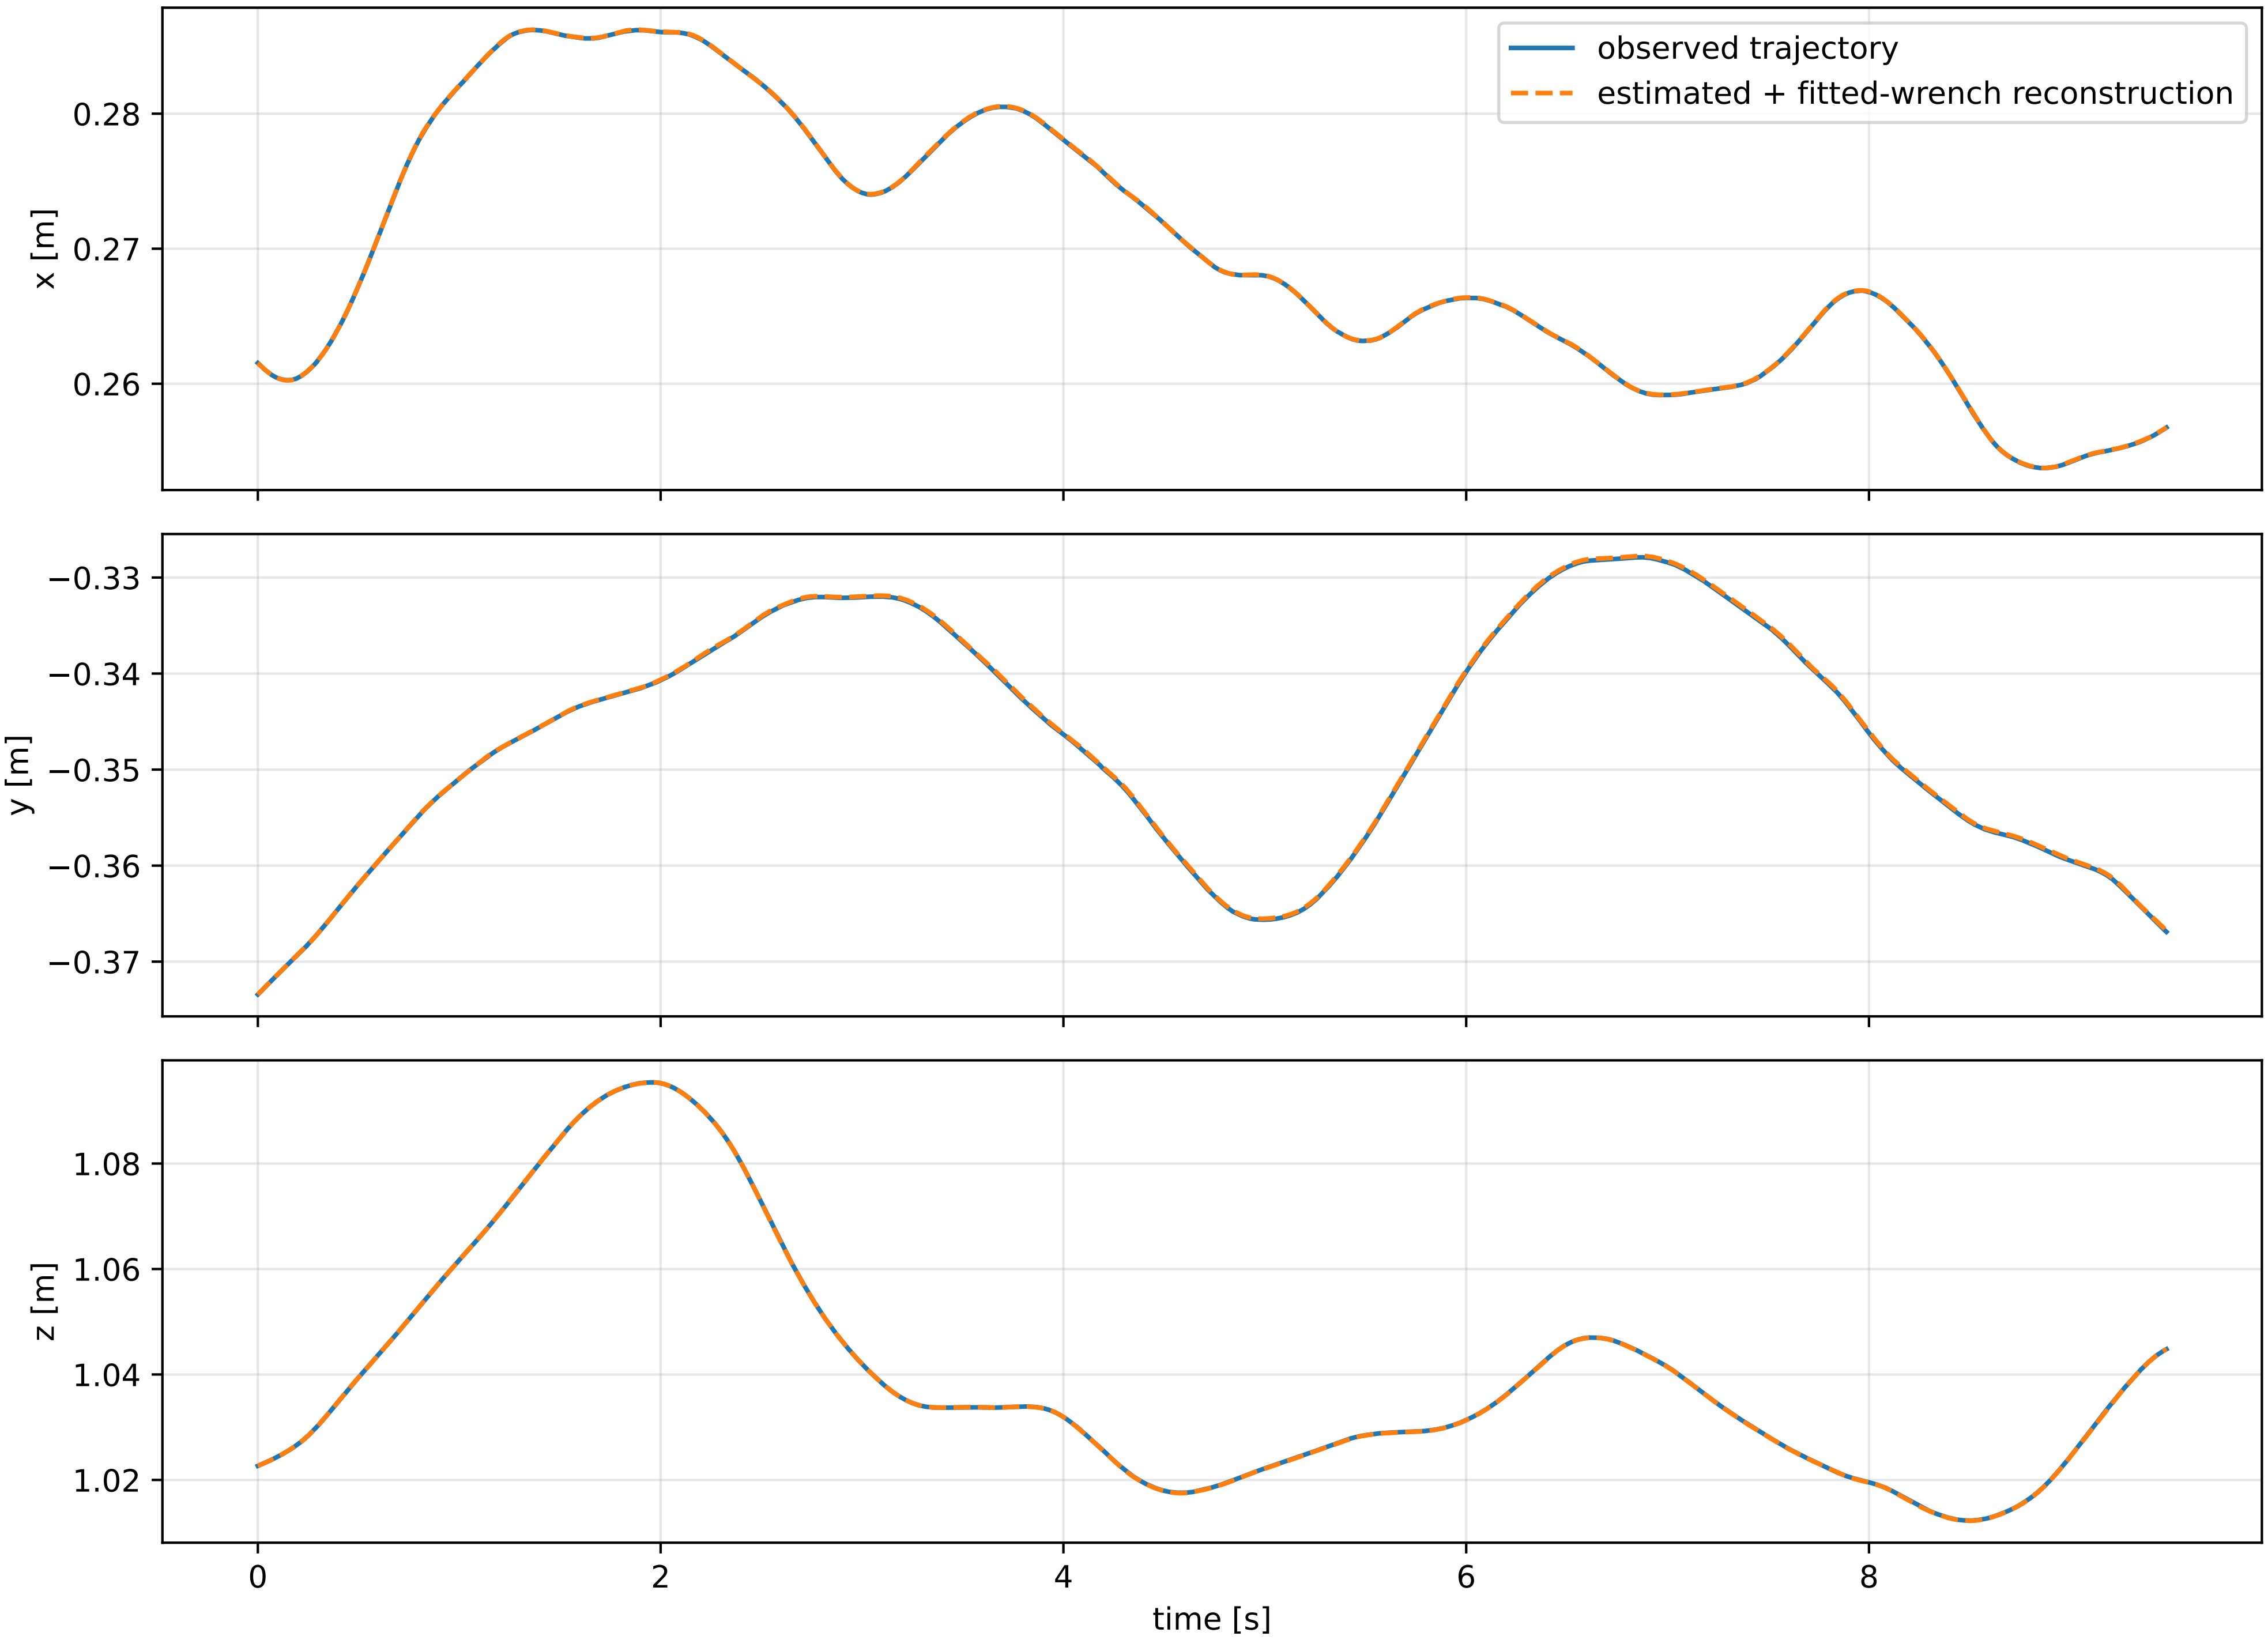

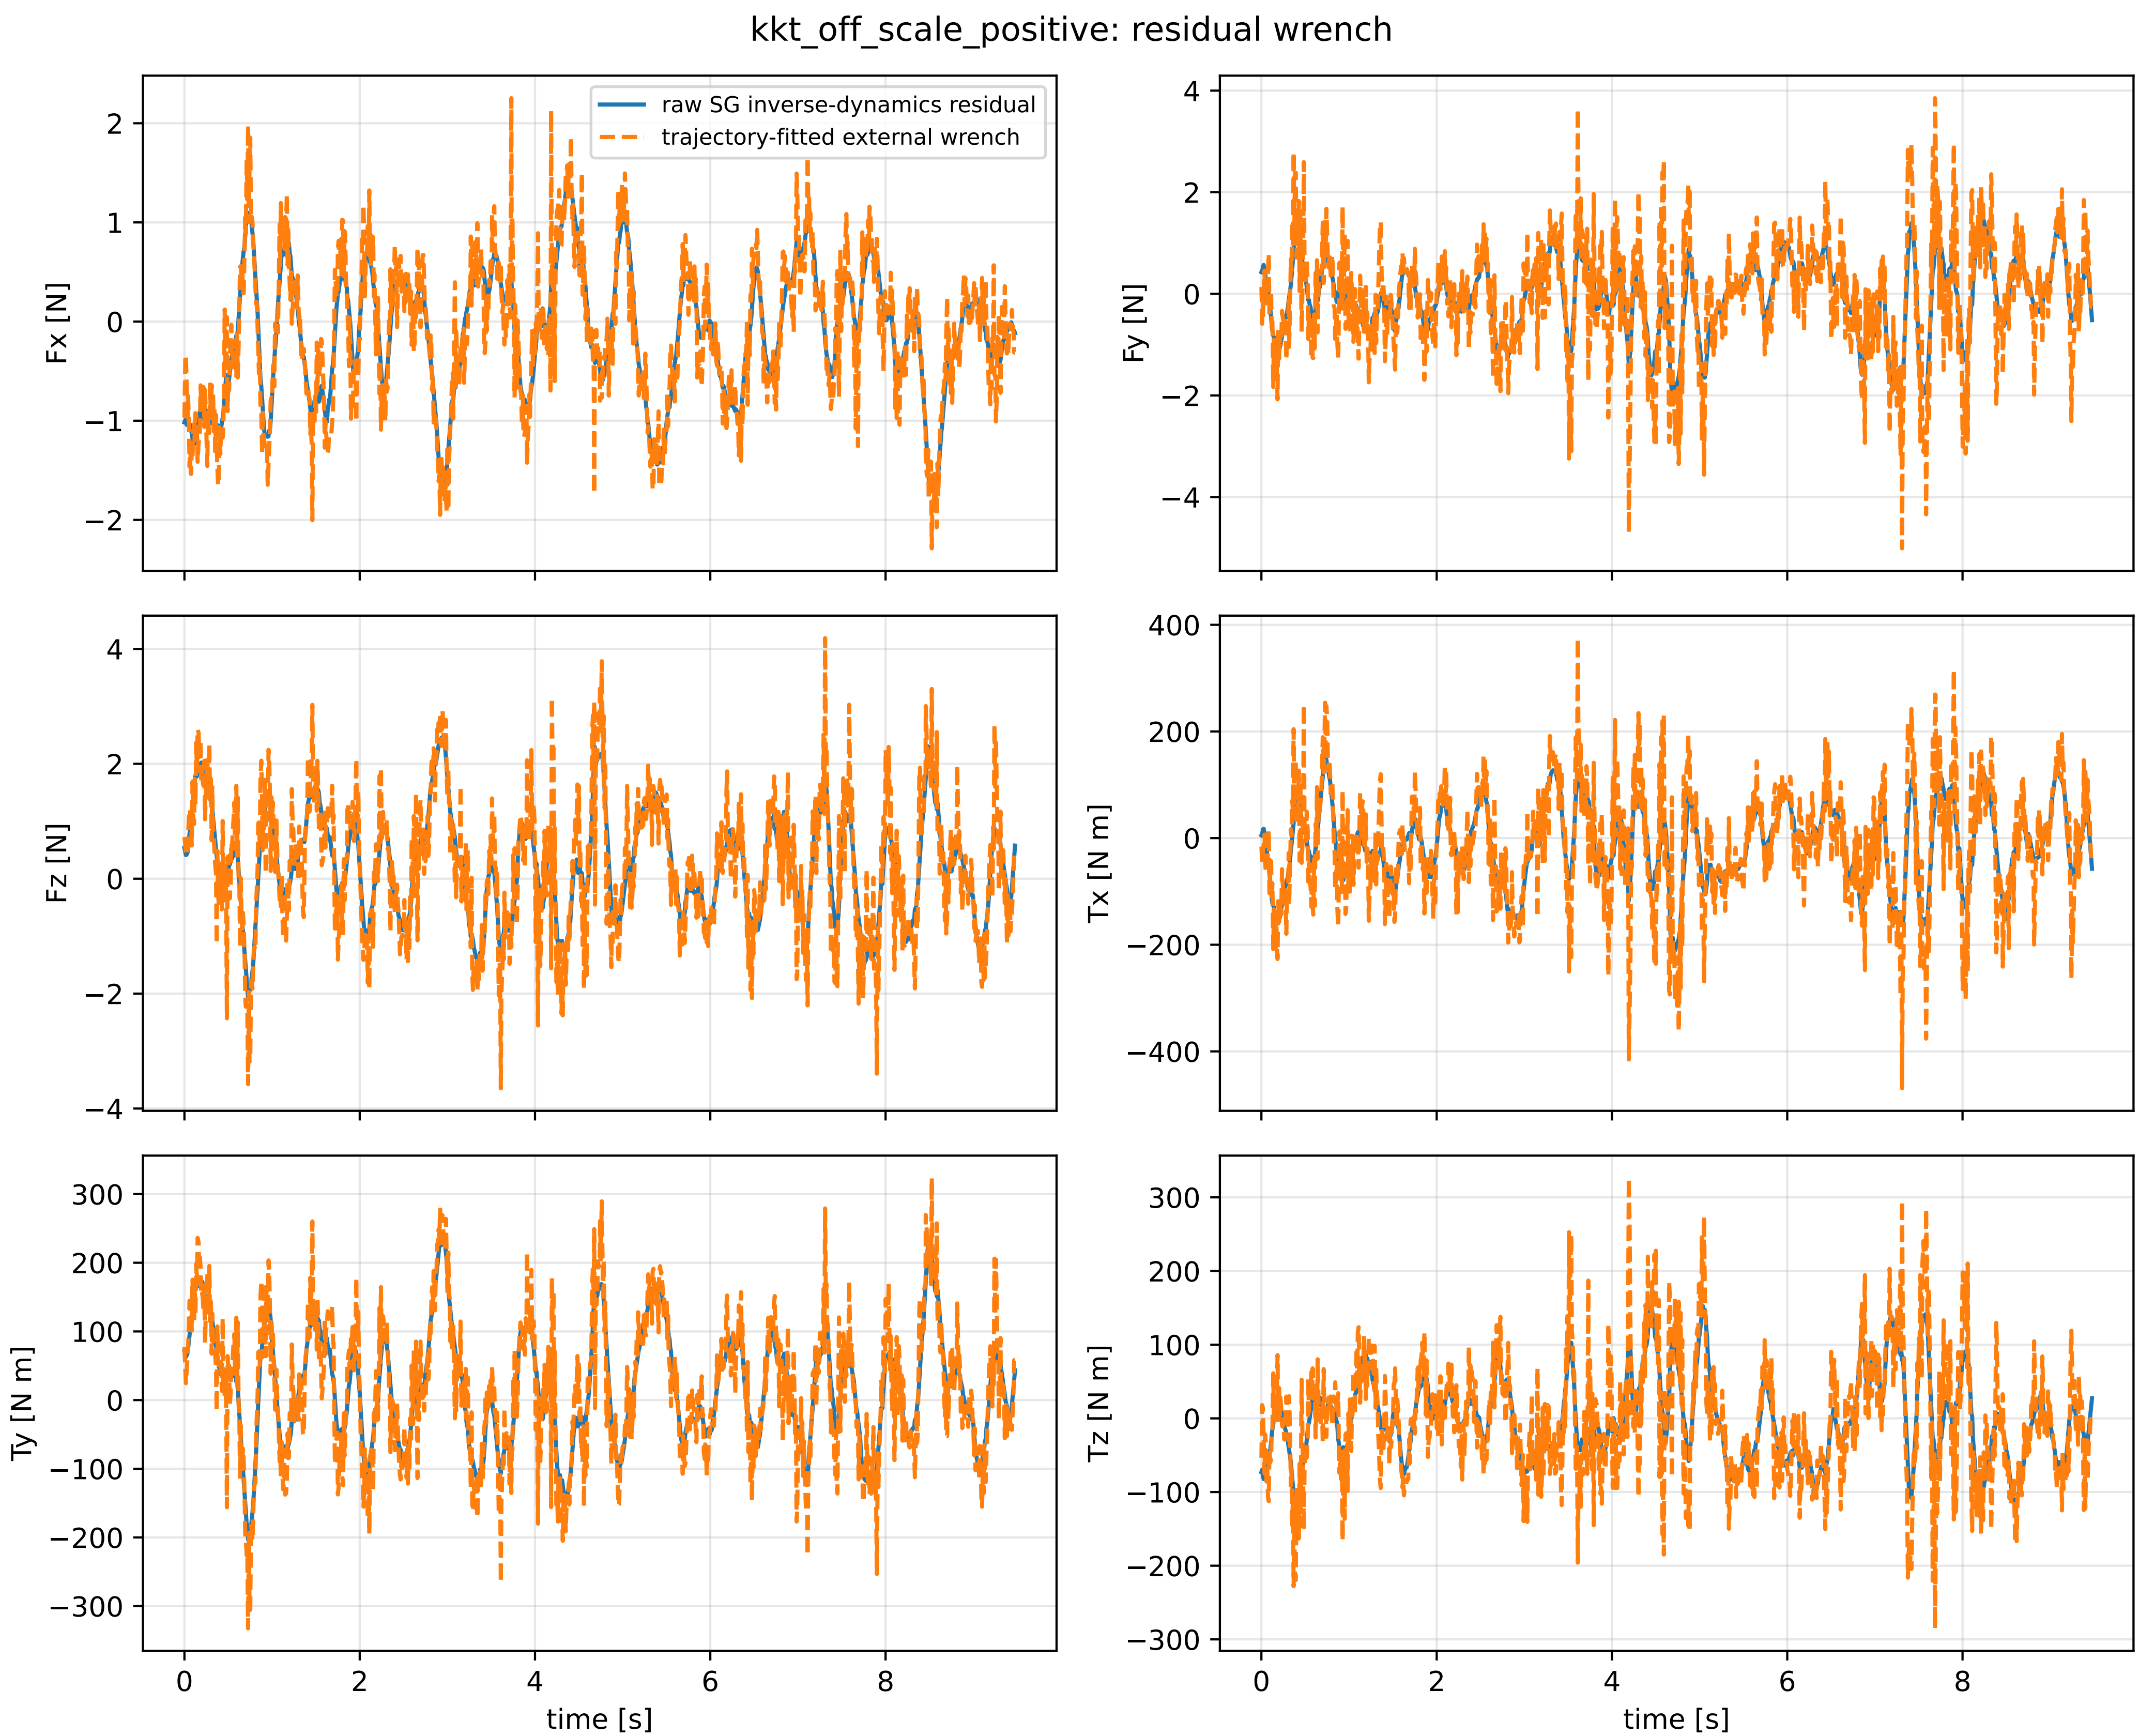

kkt_off_scale_positive: residual wrench
raw SG inverse-dynamics residual
trajectory-fitted external wrench
Fx [N]
Fy [N]
Fz [N]
Tx [N m]
Ty [N m]
Tz [N m]
time [s]
time [s]

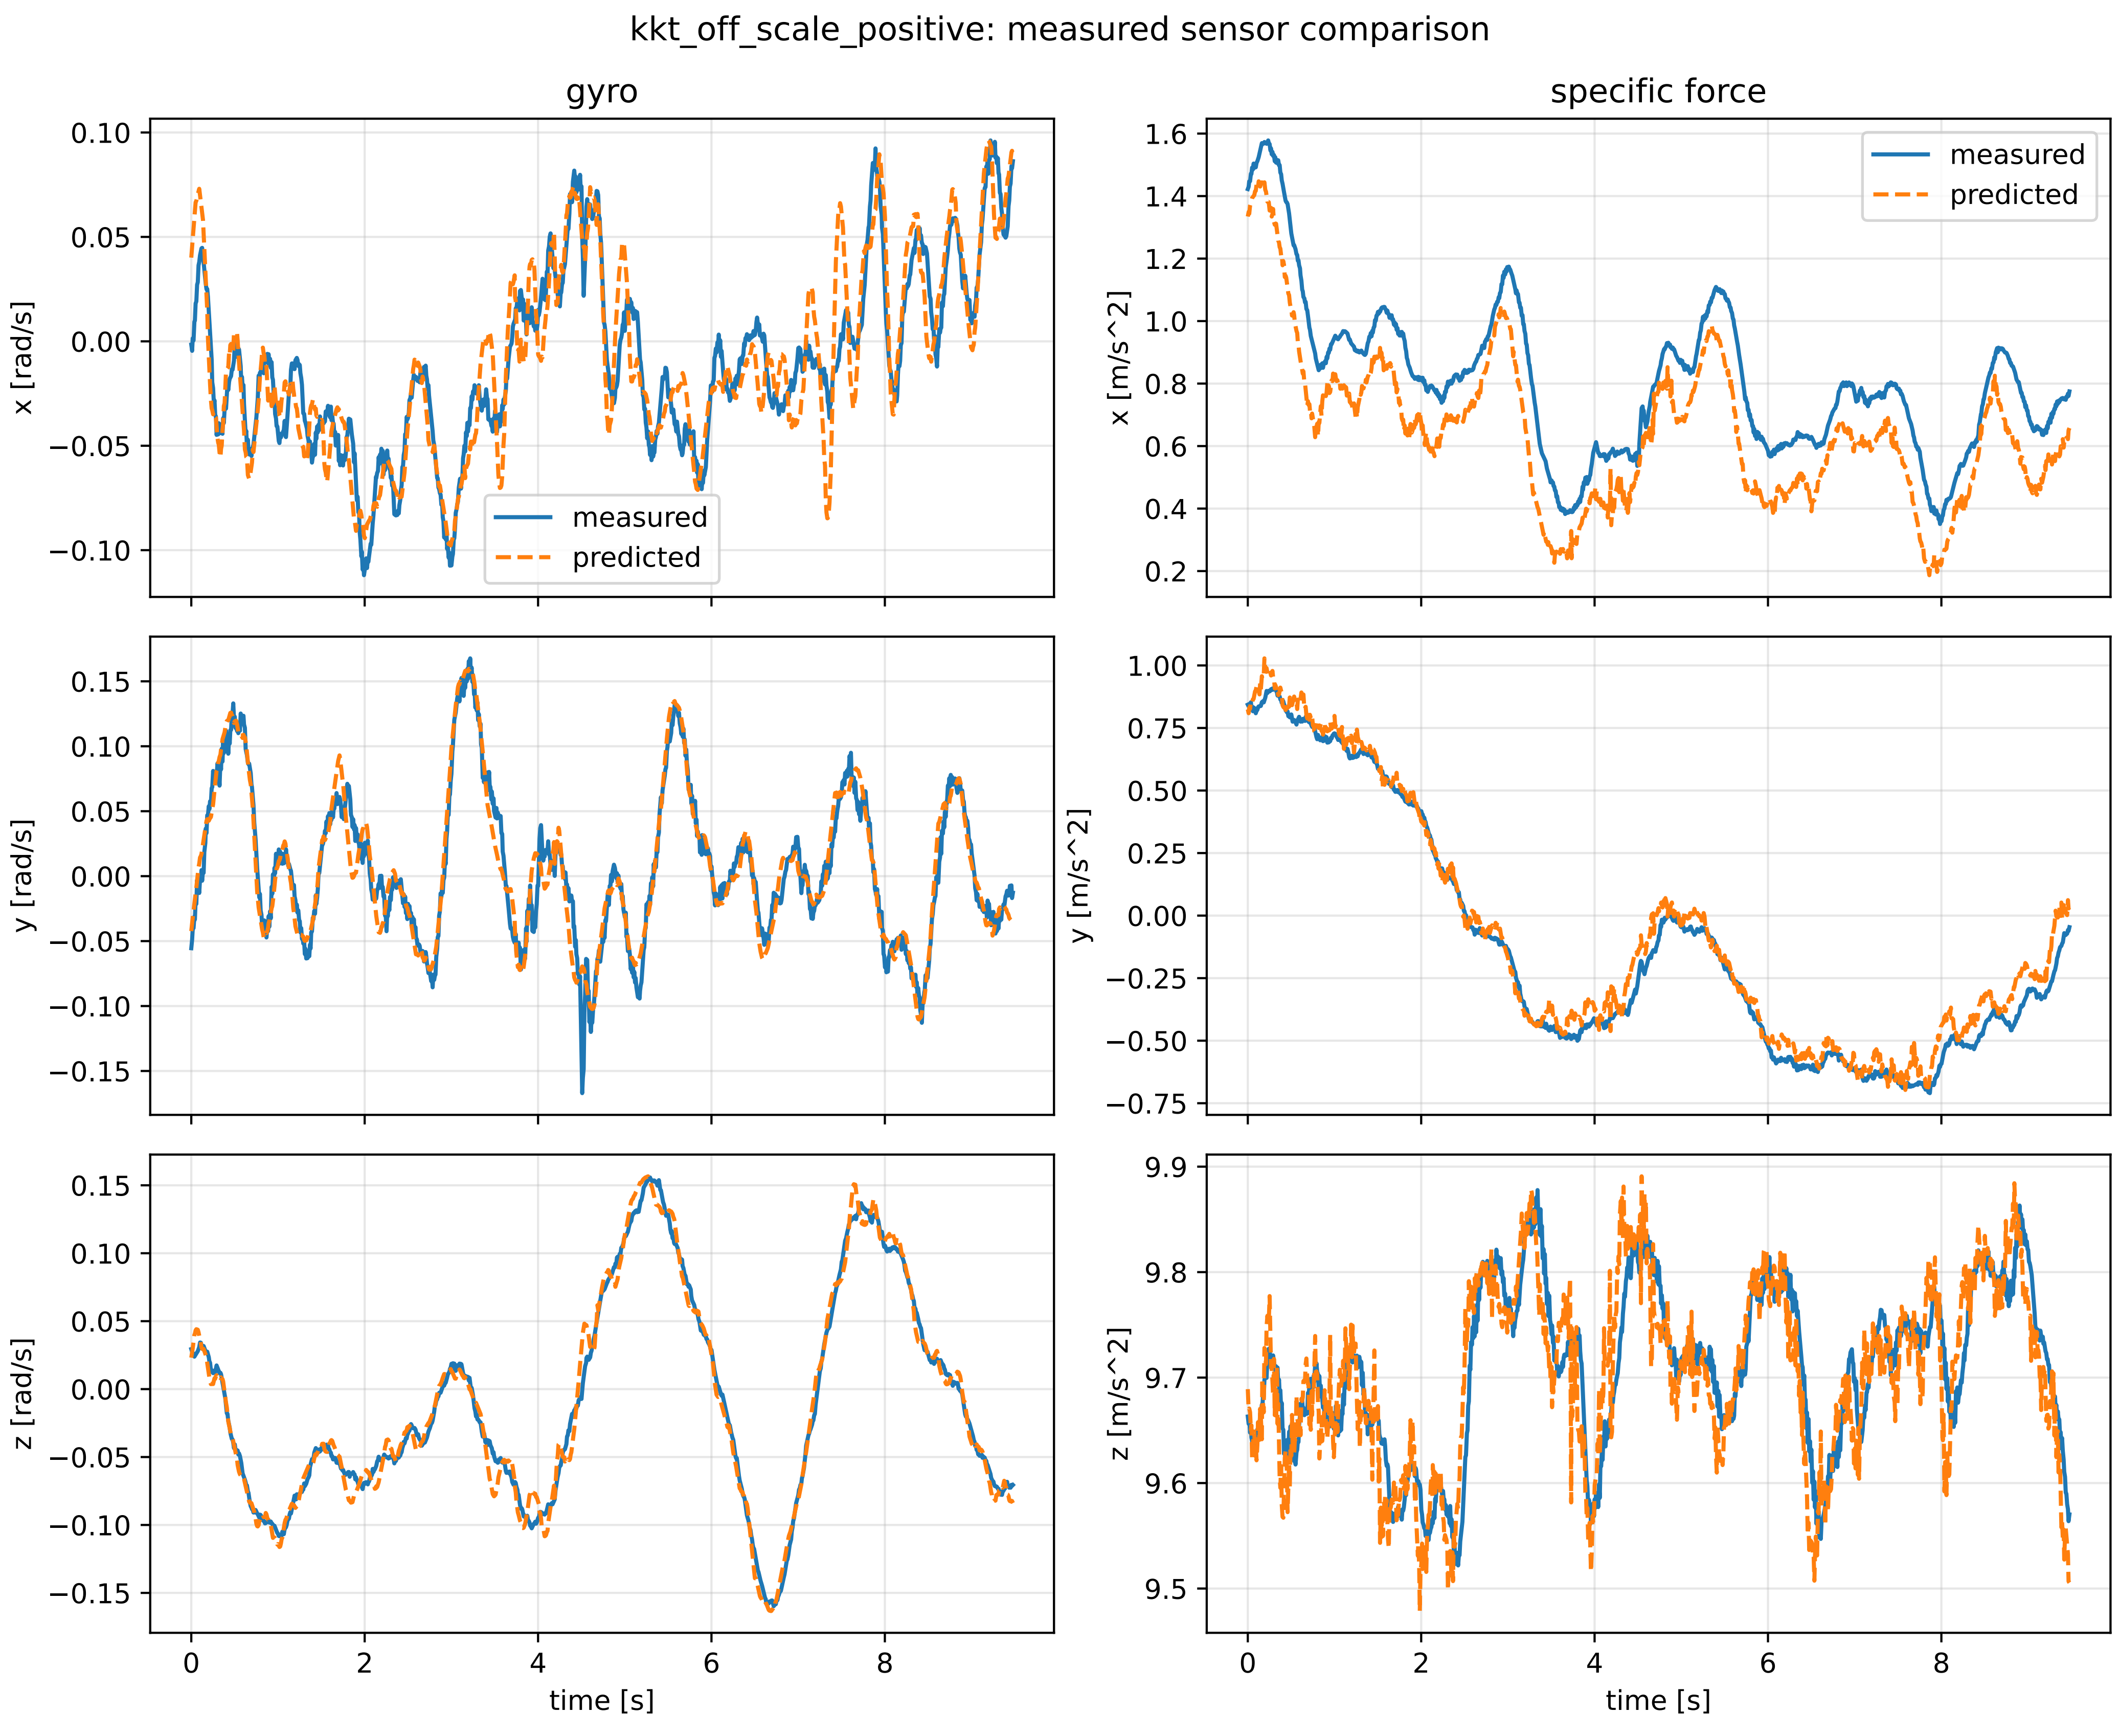

kkt_off_scale_positive: measured sensor comparison
gyro
specific force
measured
predicted
x [rad/s]
y [rad/s]
z [rad/s]
x [m/s^2]
y [m/s^2]
z [m/s^2]
time [s]
time [s]

kkt_off_scale_positive: nominal -> estimated parameters

```
Case: kkt_off_scale_positive
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  1.535133   delta -0.816464589

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [ 166.7747124  -99.0304736 -105.073347 ]   d=[ 166.7097123  -99.0304728 -
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [-99.0304736 213.3864472 -83.1330746]   d=[-99.0304728 213.3214945 -83.13
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-105.073347   -83.1330746  203.562667 ]   d=[-105.073366   -83.1330746  203

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-1.3324326 -0.9585076 -1.1045125]   d=[-1.3304079 -0.958477
rotor force effectiveness
  [1. 1. 1. 1.] -> [0.3314766 0.3504285 0.5874088 0.8013681]   d=[-0.6685234 -0.6495715 -0.4125912 -0.1986319]

rotor lag [s]  0.199999857
gimbal lag [s]  0.0503390711
```