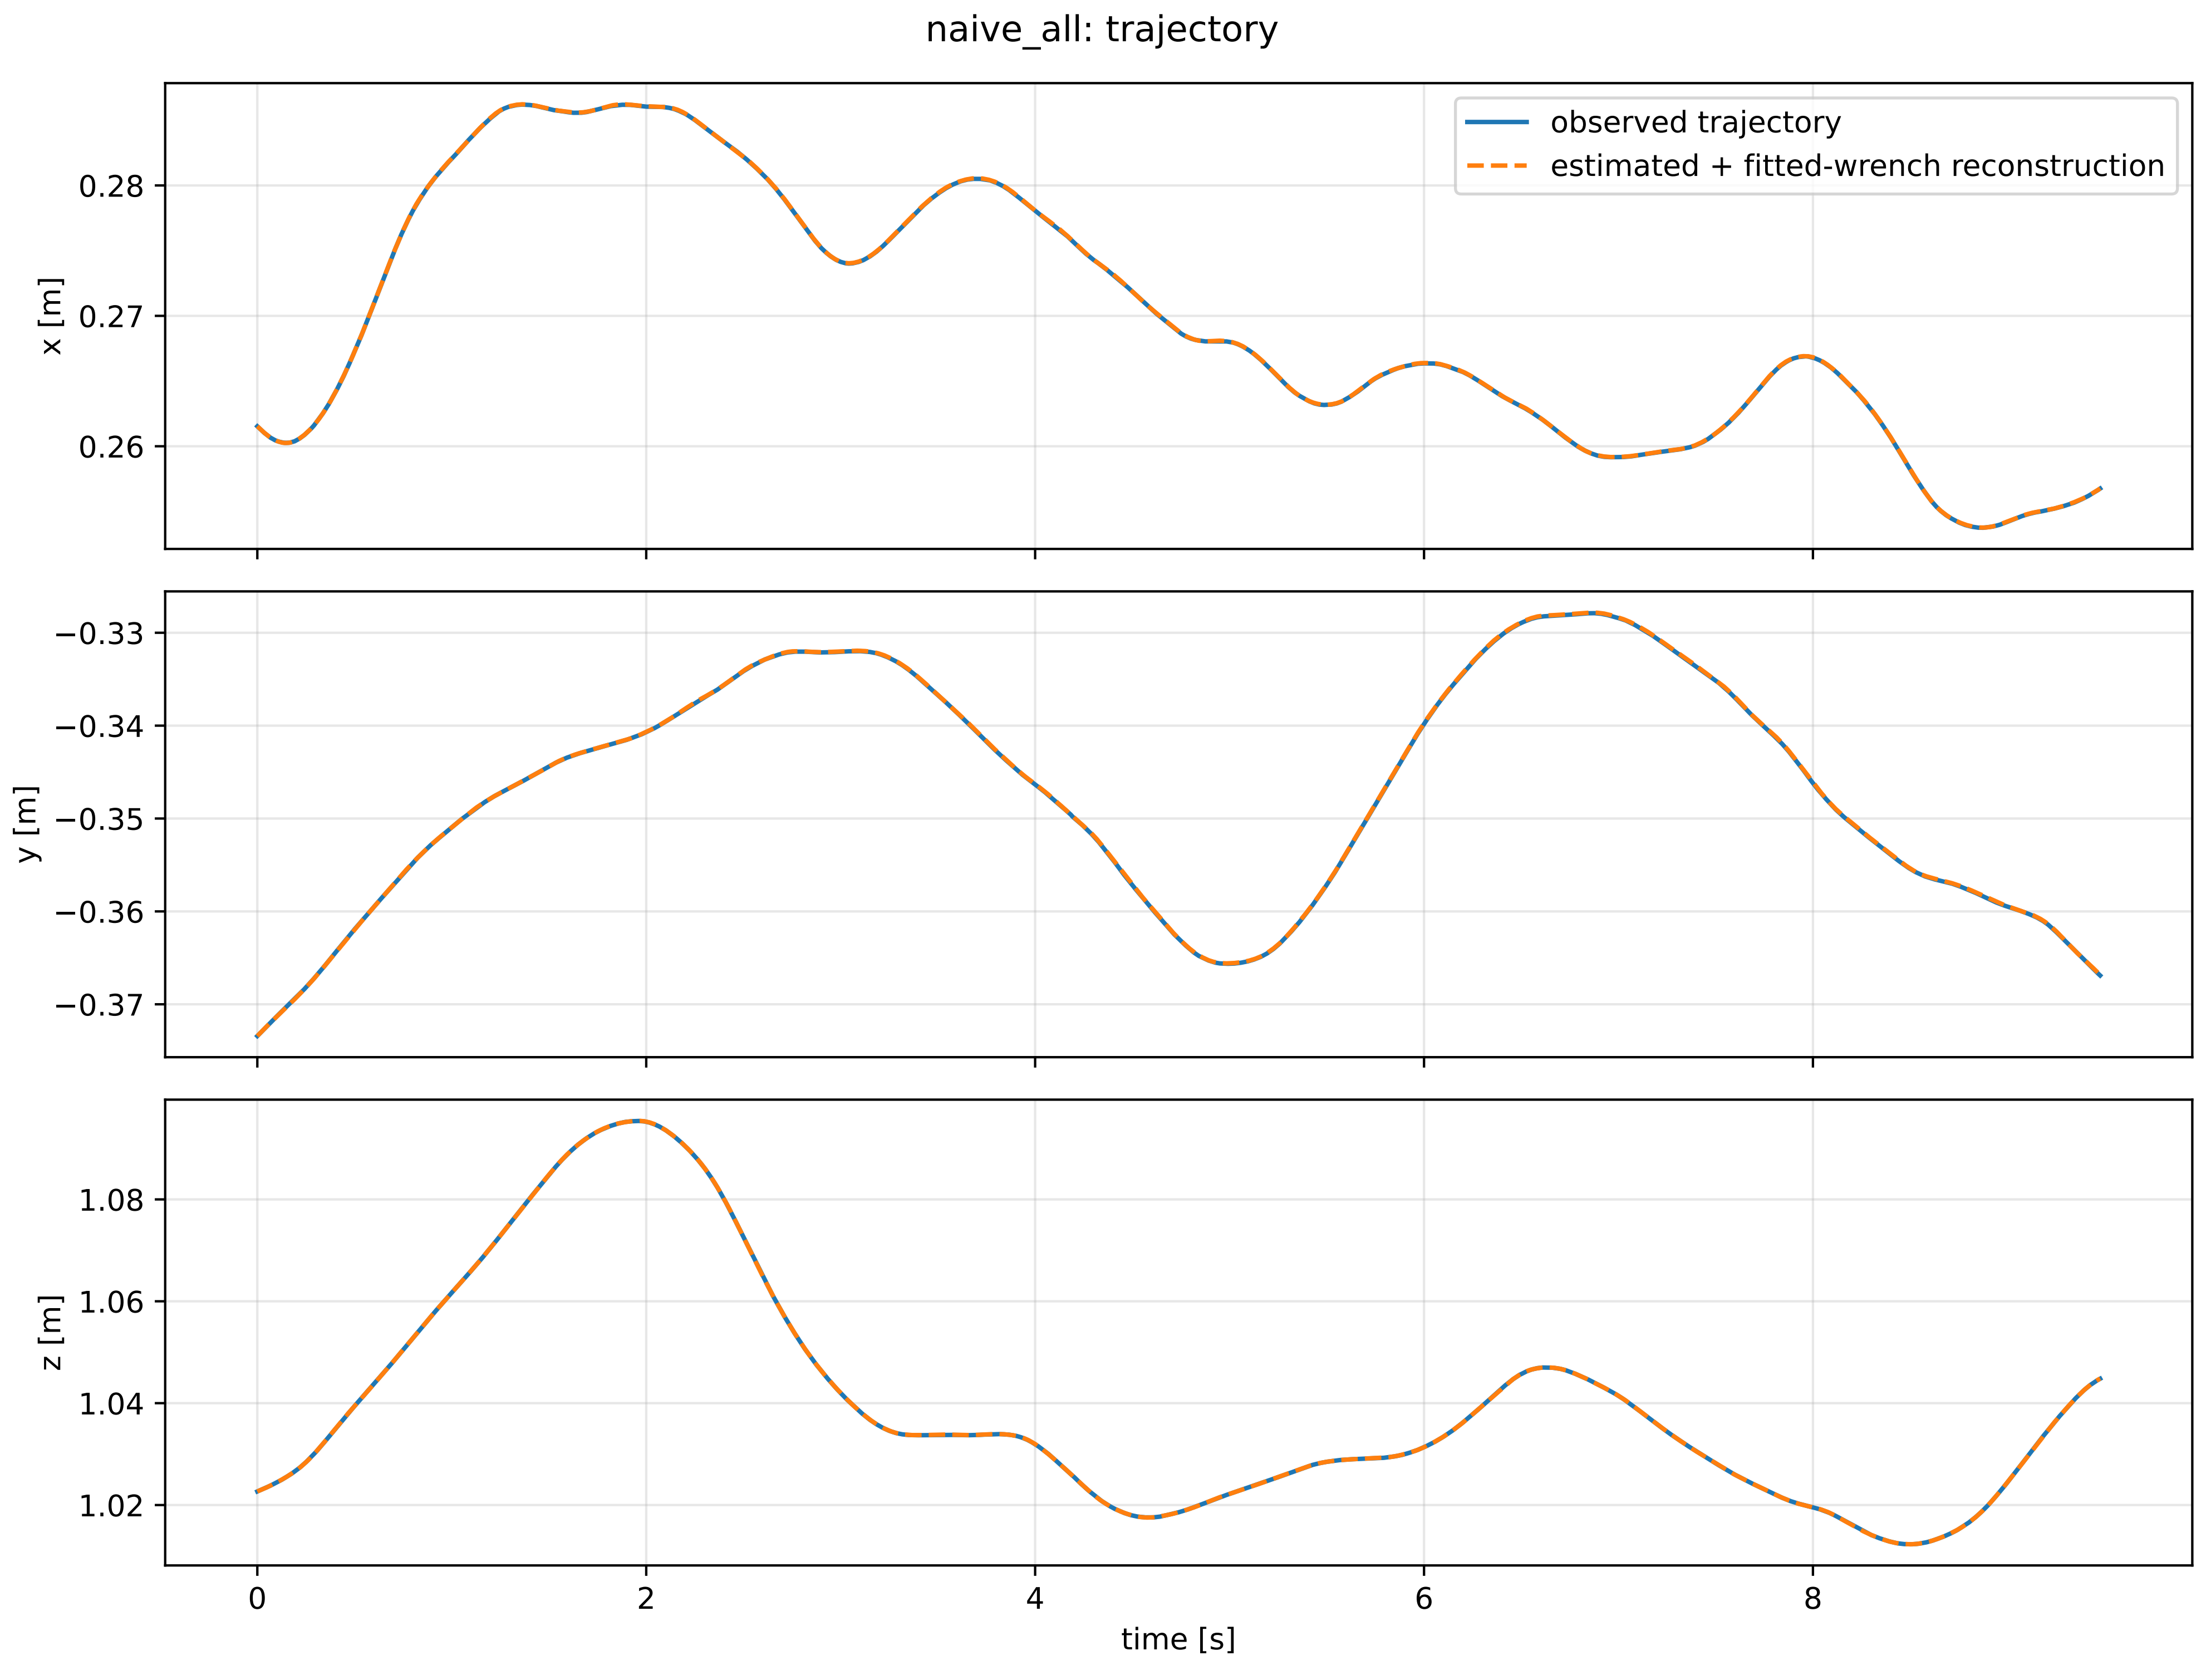
naive_all: trajectory
observed trajectory
estimated + fitted-wrench reconstruction
x [m]
0.28
0.27
0.26
y [m]
−0.33
−0.34
−0.35
−0.36
−0.37
z [m]
1.08
1.06
1.04
1.02
0
2
4
6
8
time [s]

naive_all: residual wrench

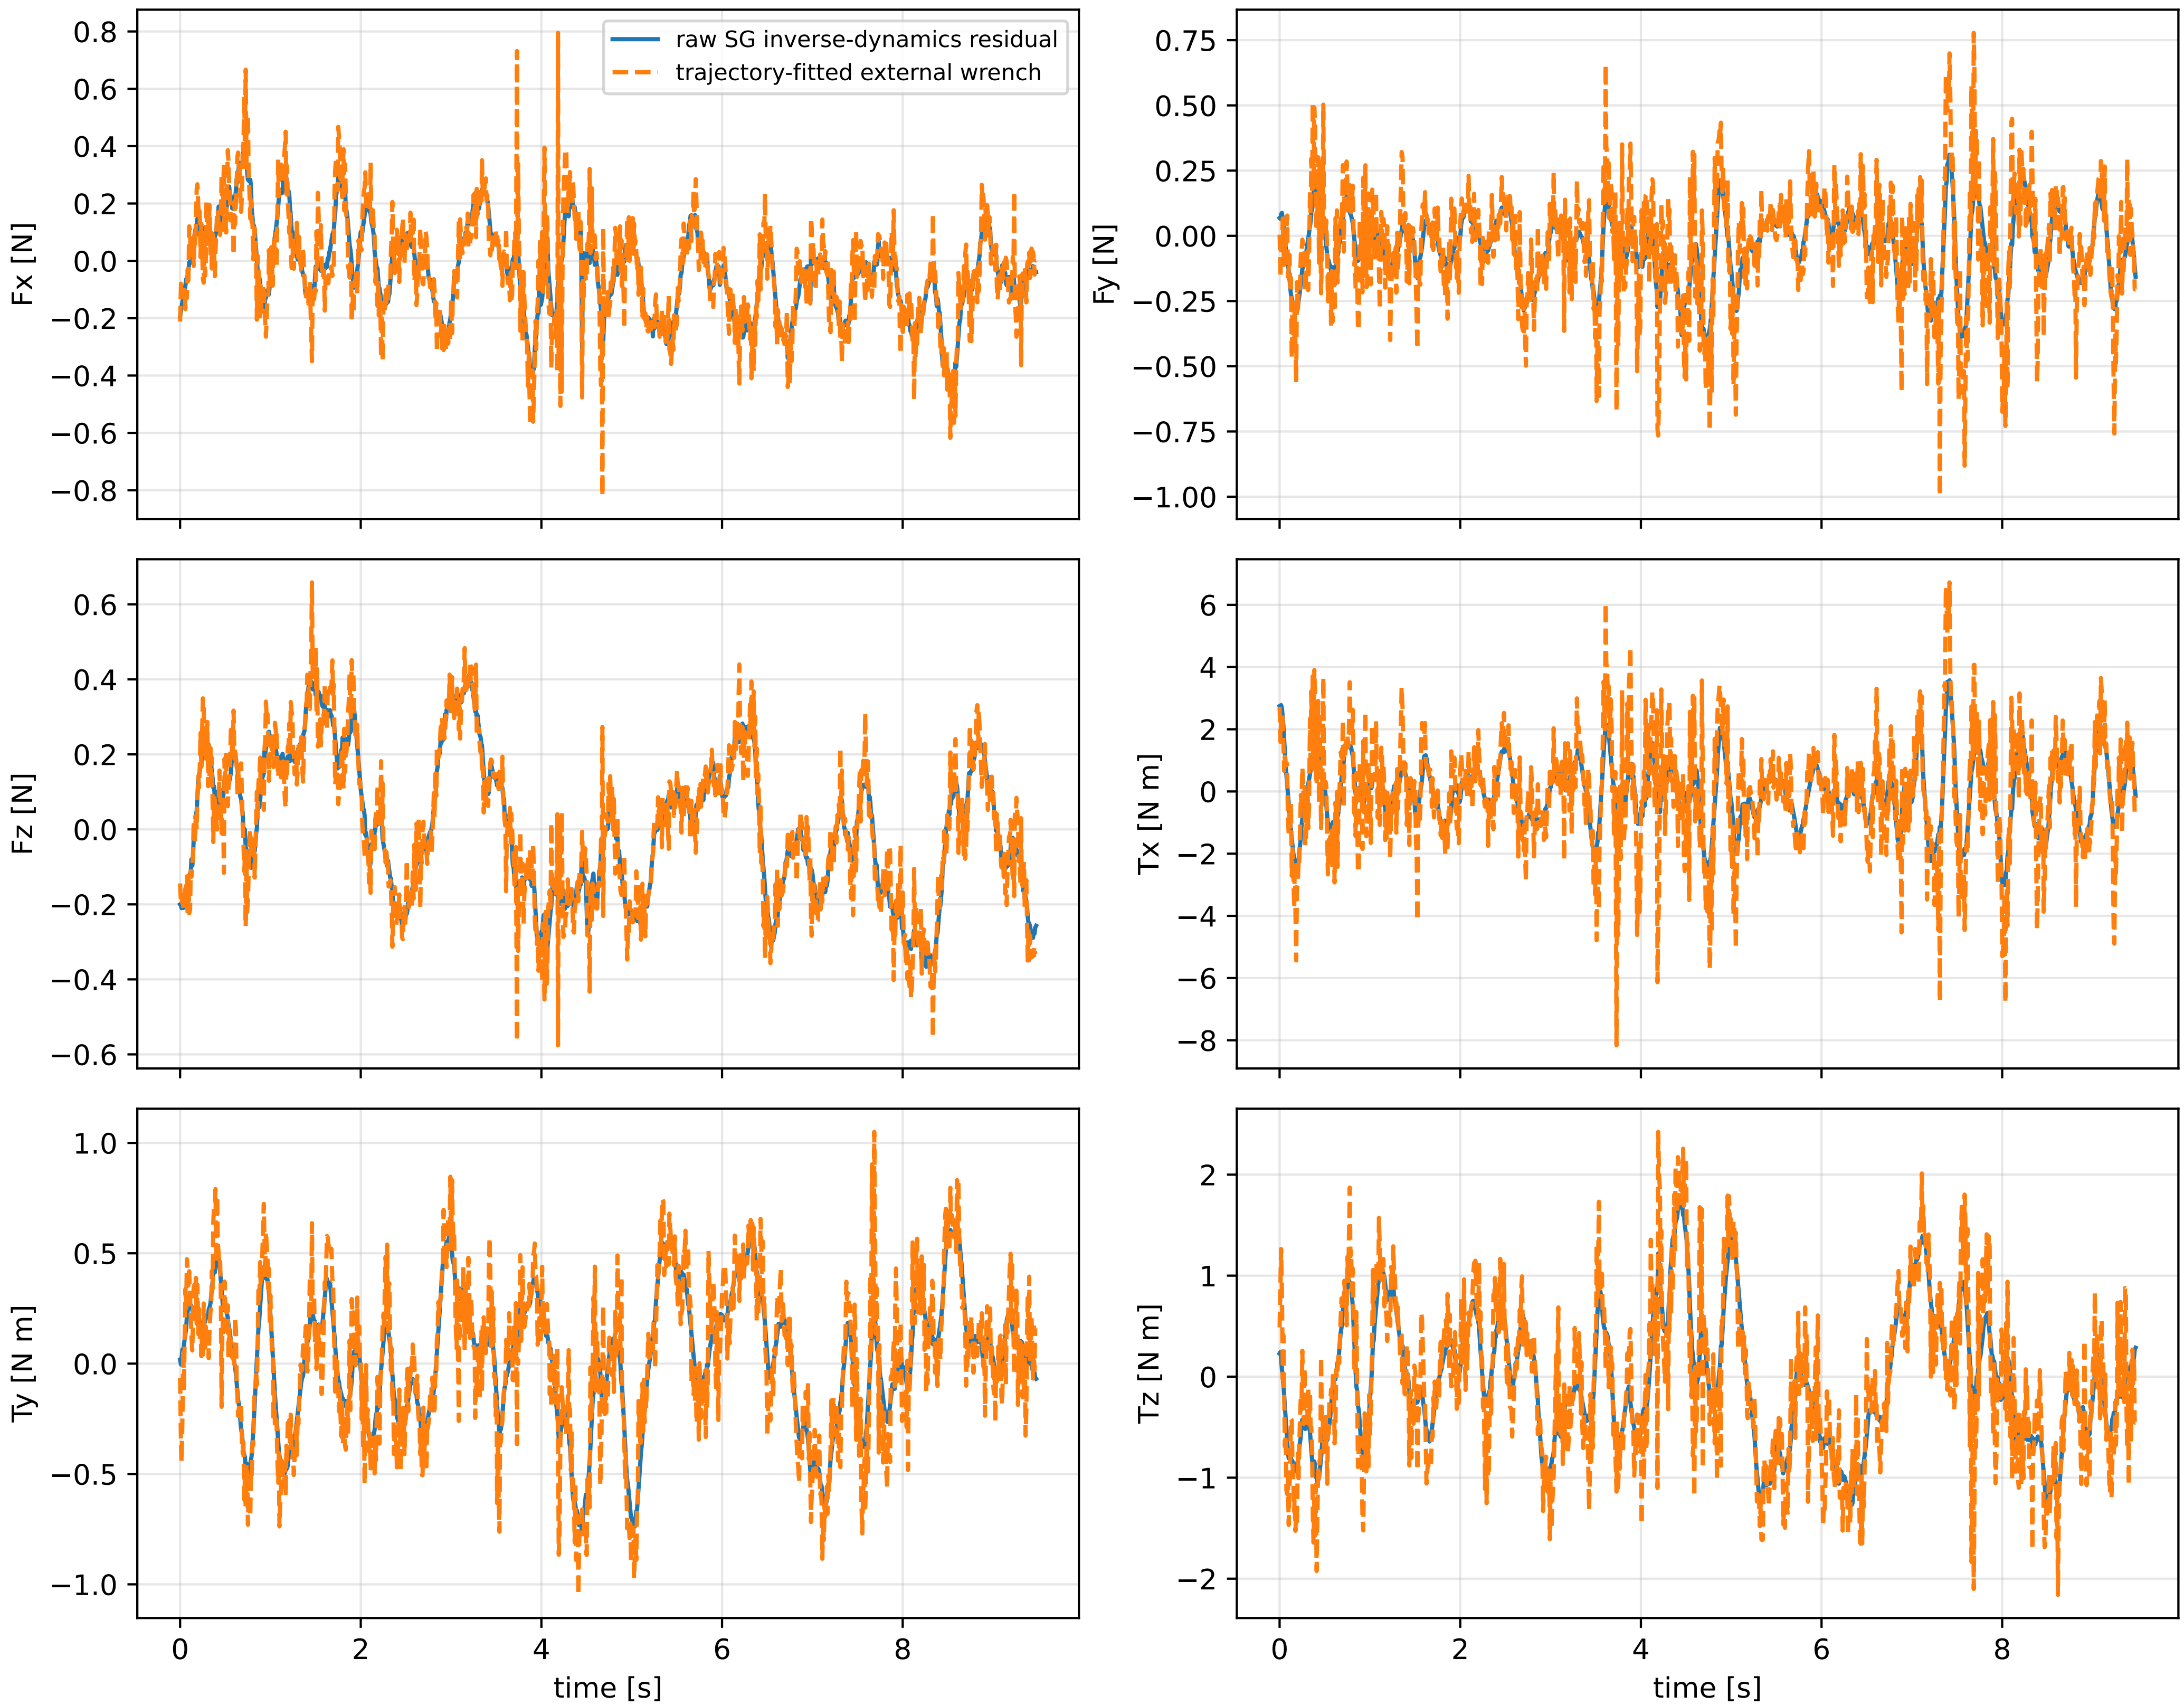

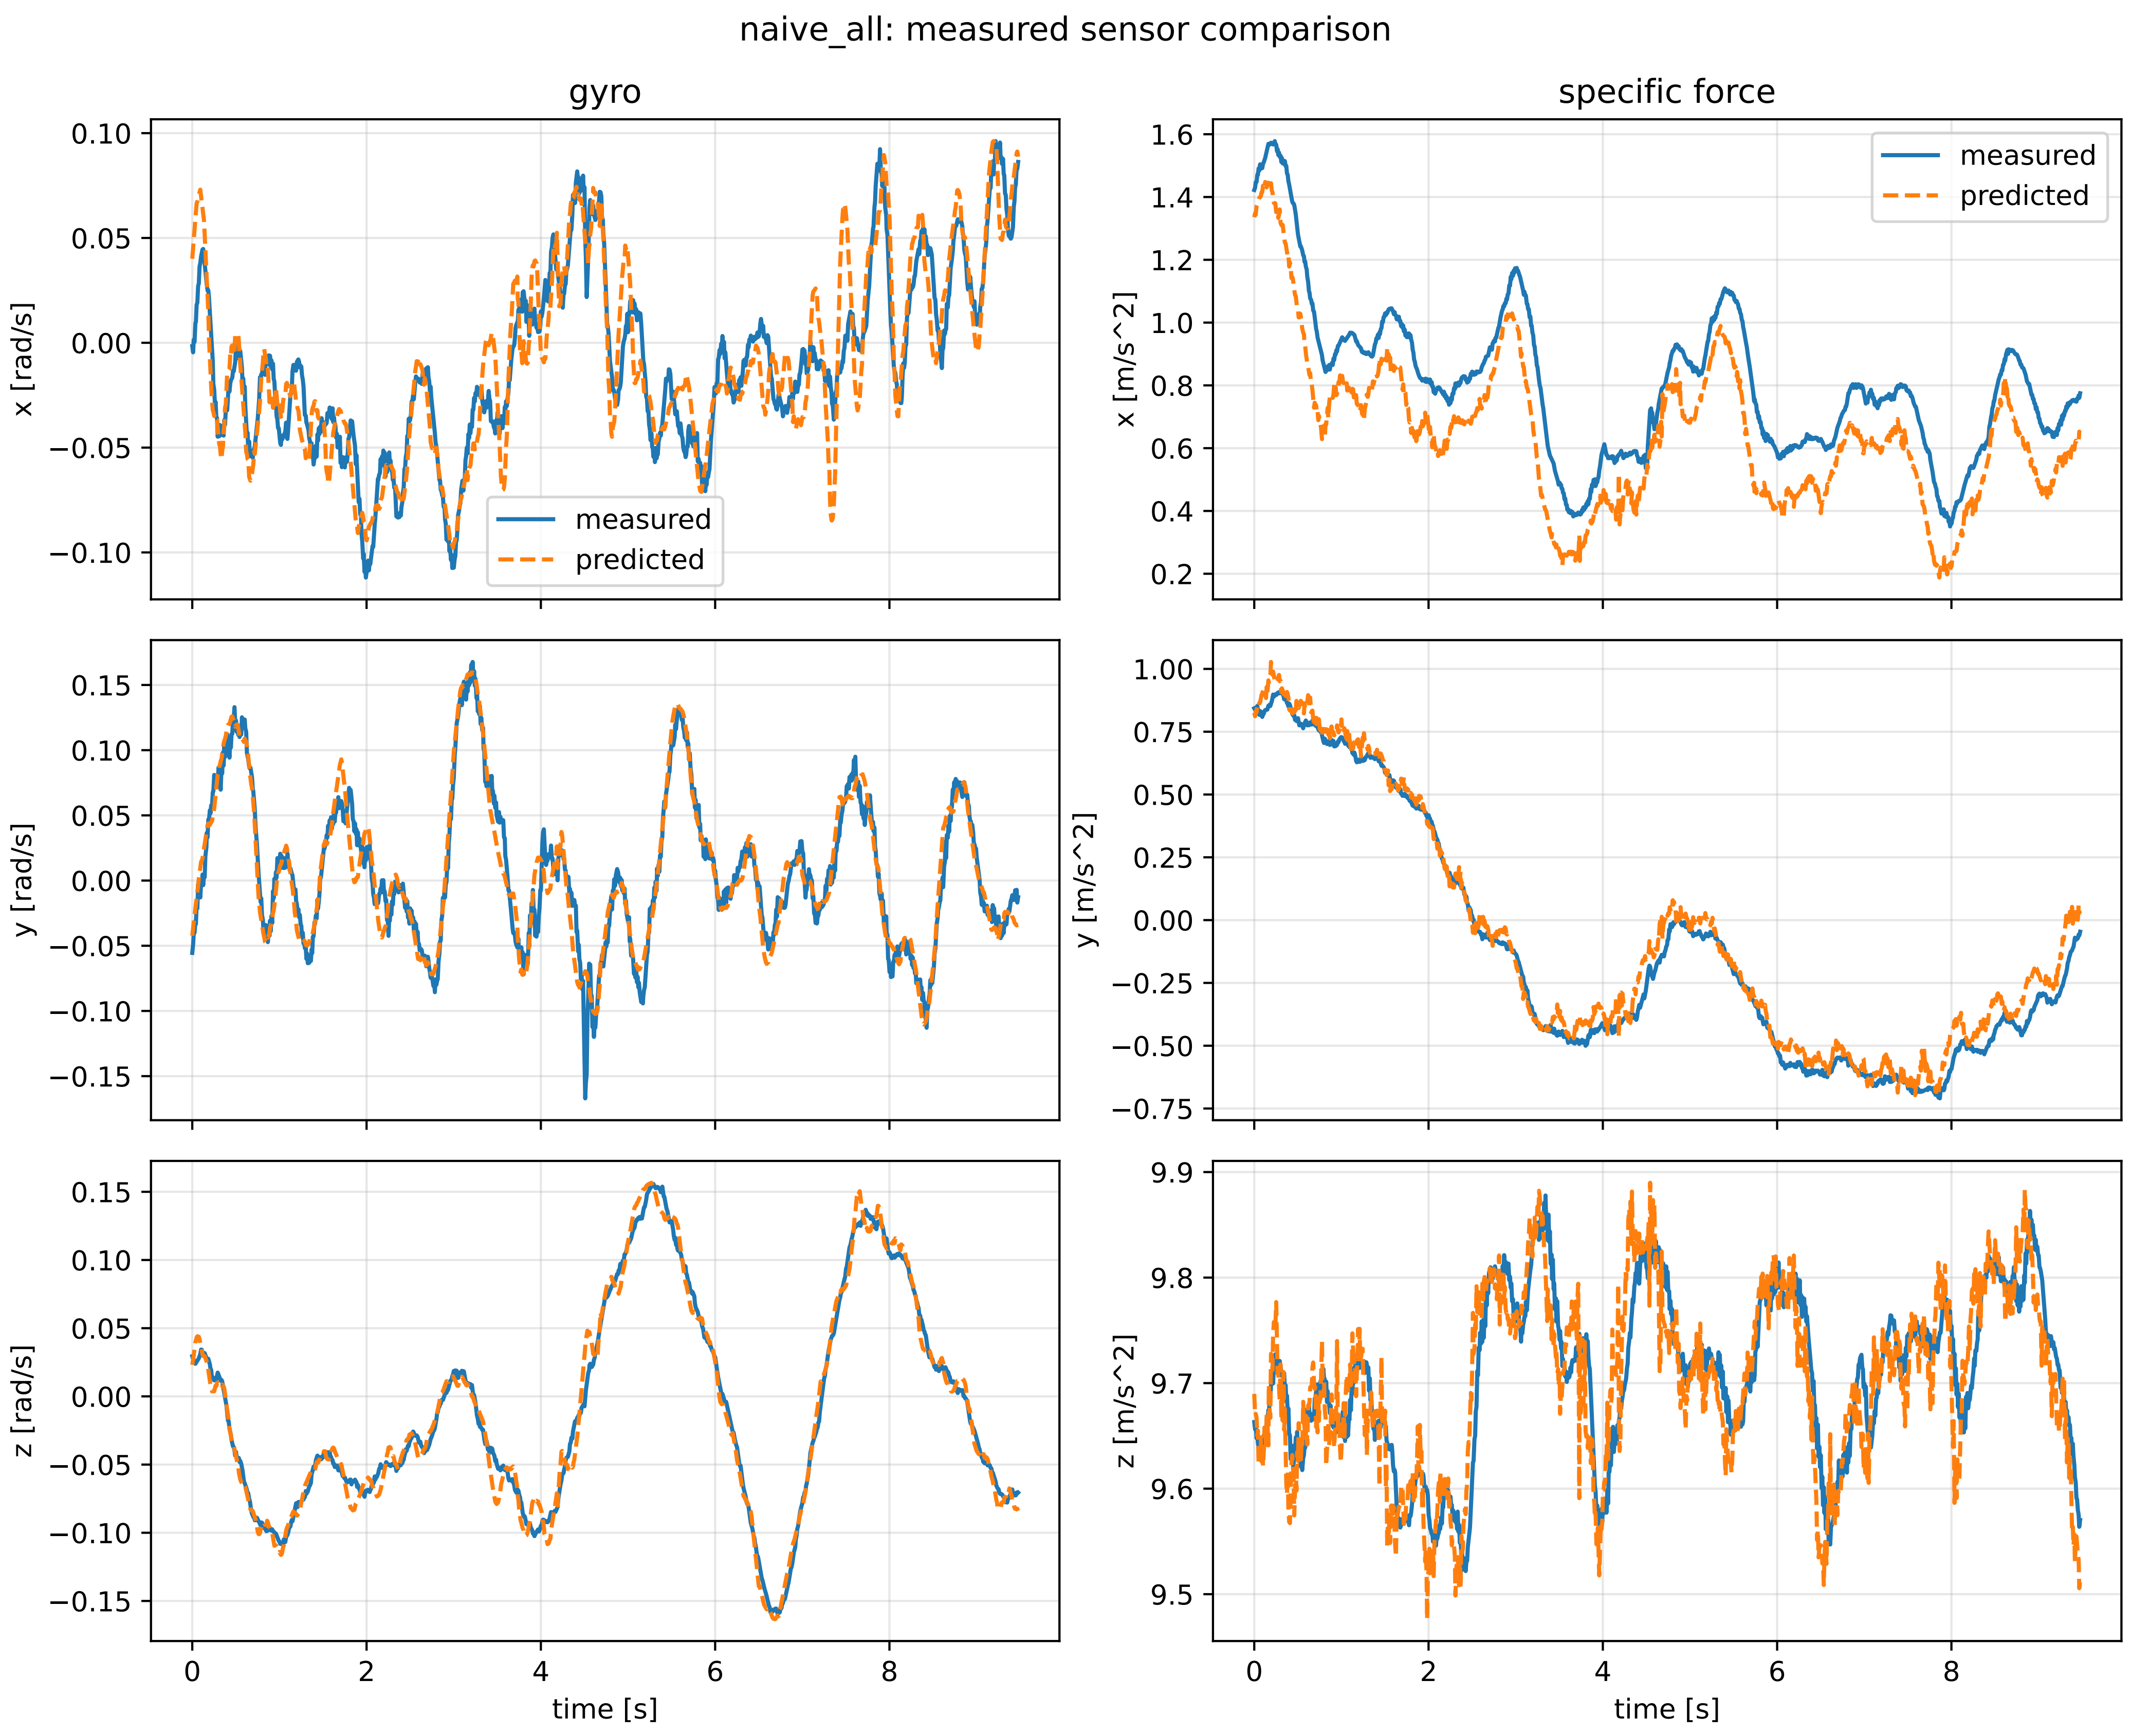
naive_all: measured sensor comparison
gyro
specific force
measured
predicted
x [rad/s]
y [rad/s]
z [rad/s]
x [m/s^2]
y [m/s^2]
z [m/s^2]
time [s]
time [s]

naive_all: nominal -> estimated parameters

```
Case: naive_all
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  1.67511236   delta -0.676485233

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [3.4607206 0.0612506 0.1320513]   d=[3.3957205 0.0612513 0.1320323]
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [ 0.0612506  0.7252623 -1.1171545]   d=[ 0.0612513  0.6603096 -1.1171545]
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [ 0.1320513 -1.1171545  2.8412659]   d=[ 0.1320323 -1.1171545  2.7122737]

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-0.1444128 -0.0533716 -0.1803521]   d=[-0.1423881 -0.053341
rotor force effectiveness
  [1. 1. 1. 1.] -> [1.0259132 0.3897186 0.1132258 0.7365993]   d=[ 0.0259132 -0.6102814 -0.8867742 -0.2634007]

rotor lag [s]  0
gimbal lag [s]  0
```