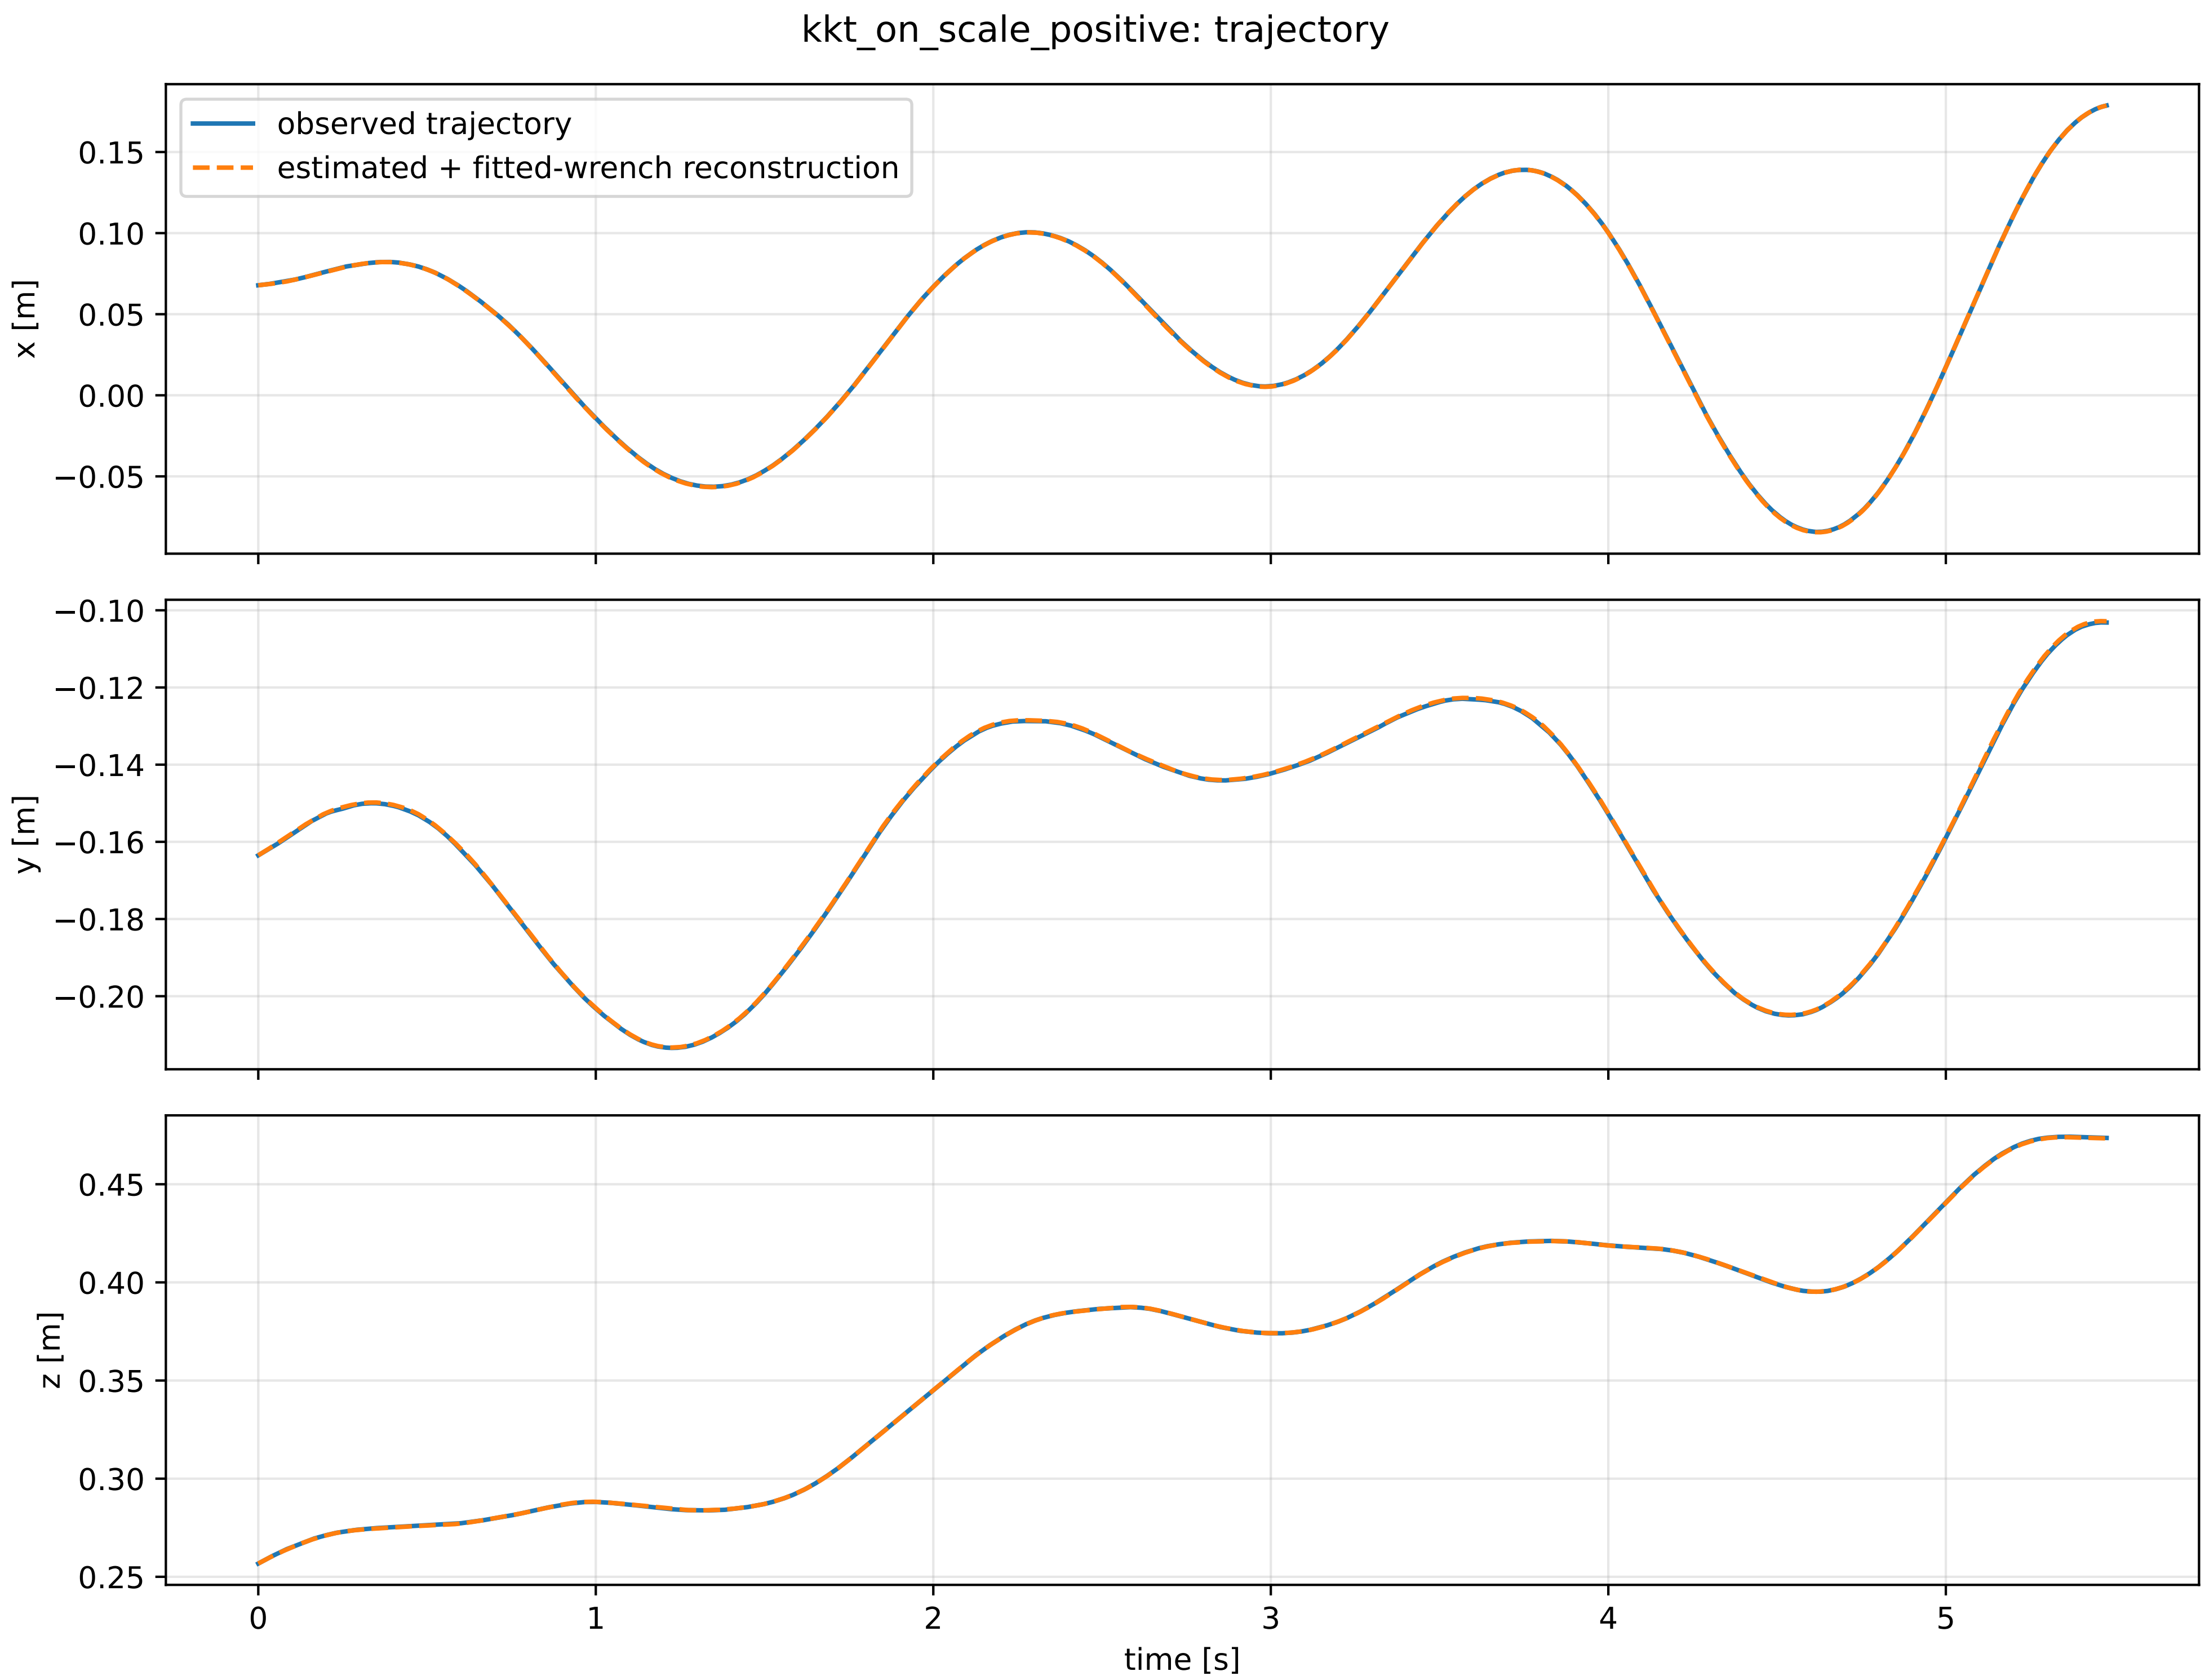

kkt_on_scale_positive: trajectory
observed trajectory
estimated + fitted-wrench reconstruction
x [m]
0.15
0.10
0.05
0.00
−0.05
y [m]
−0.10
−0.12
−0.14
−0.16
−0.18
−0.20
z [m]
0.45
0.40
0.35
0.30
0.25
0
1
2
3
4
5
time [s]

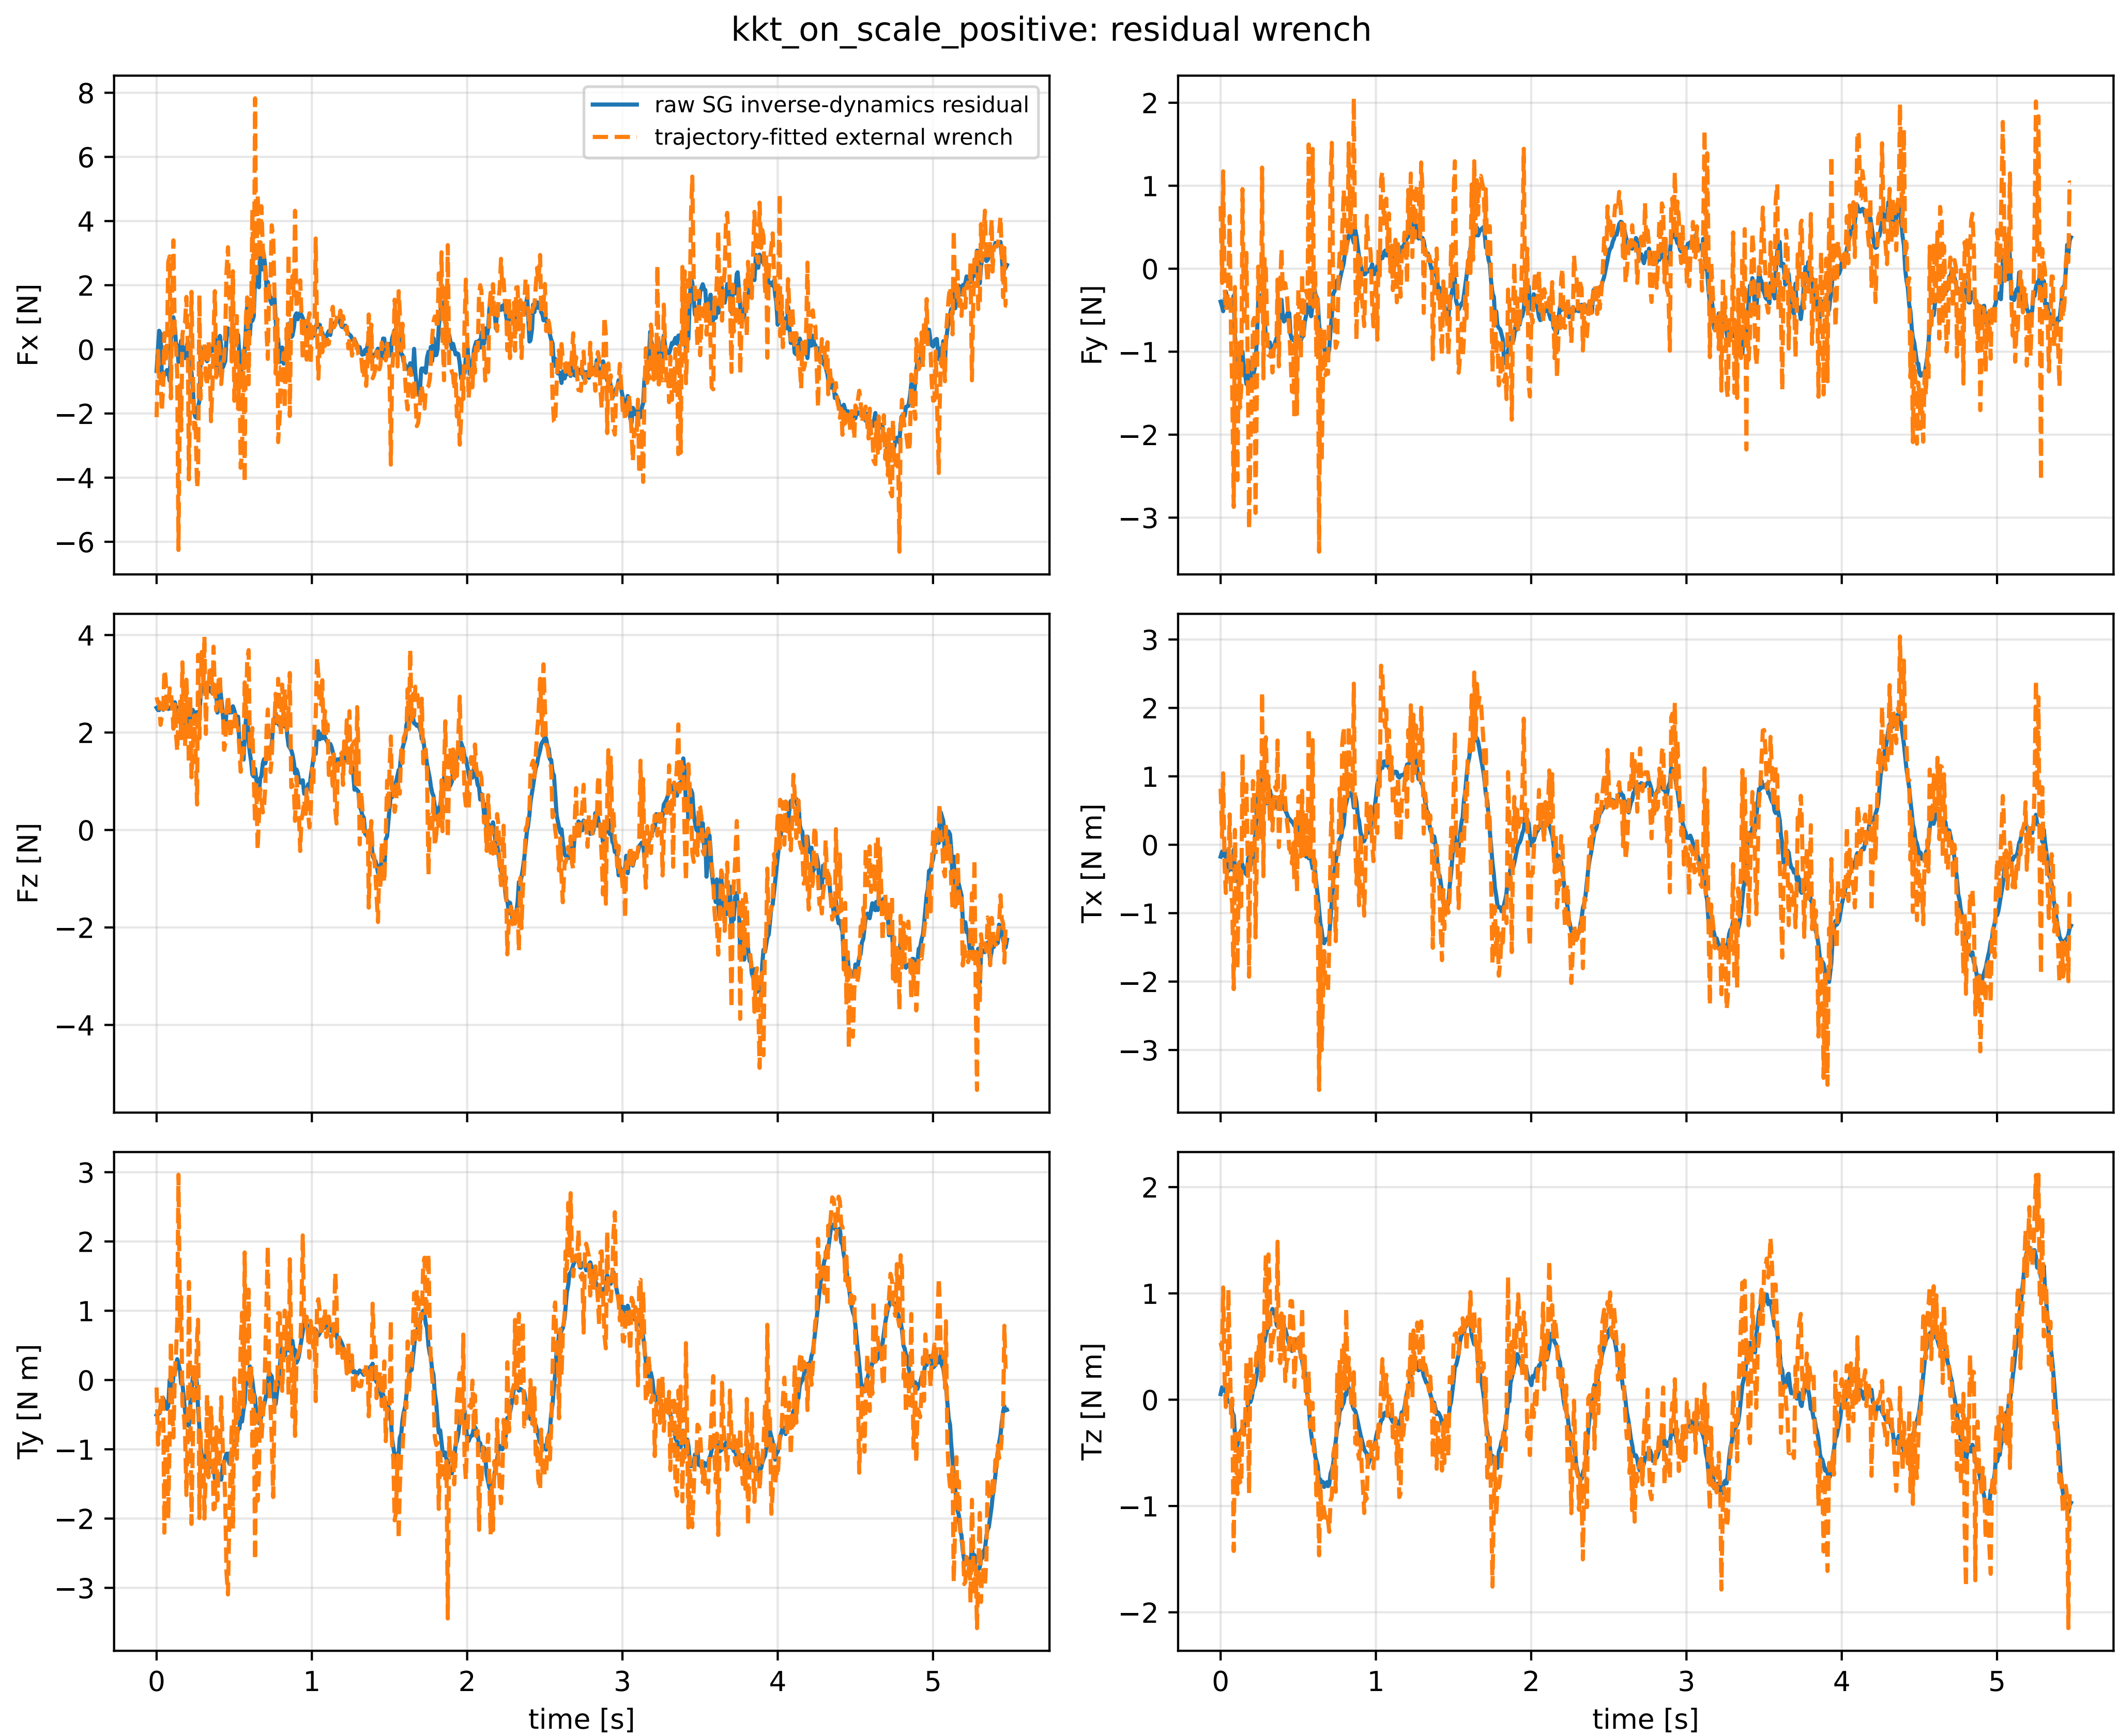
kkt_on_scale_positive: residual wrench
raw SG inverse-dynamics residual
trajectory-fitted external wrench
Fx [N]
Fy [N]
Fz [N]
Tx [N m]
Ty [N m]
Tz [N m]
time [s]
time [s]

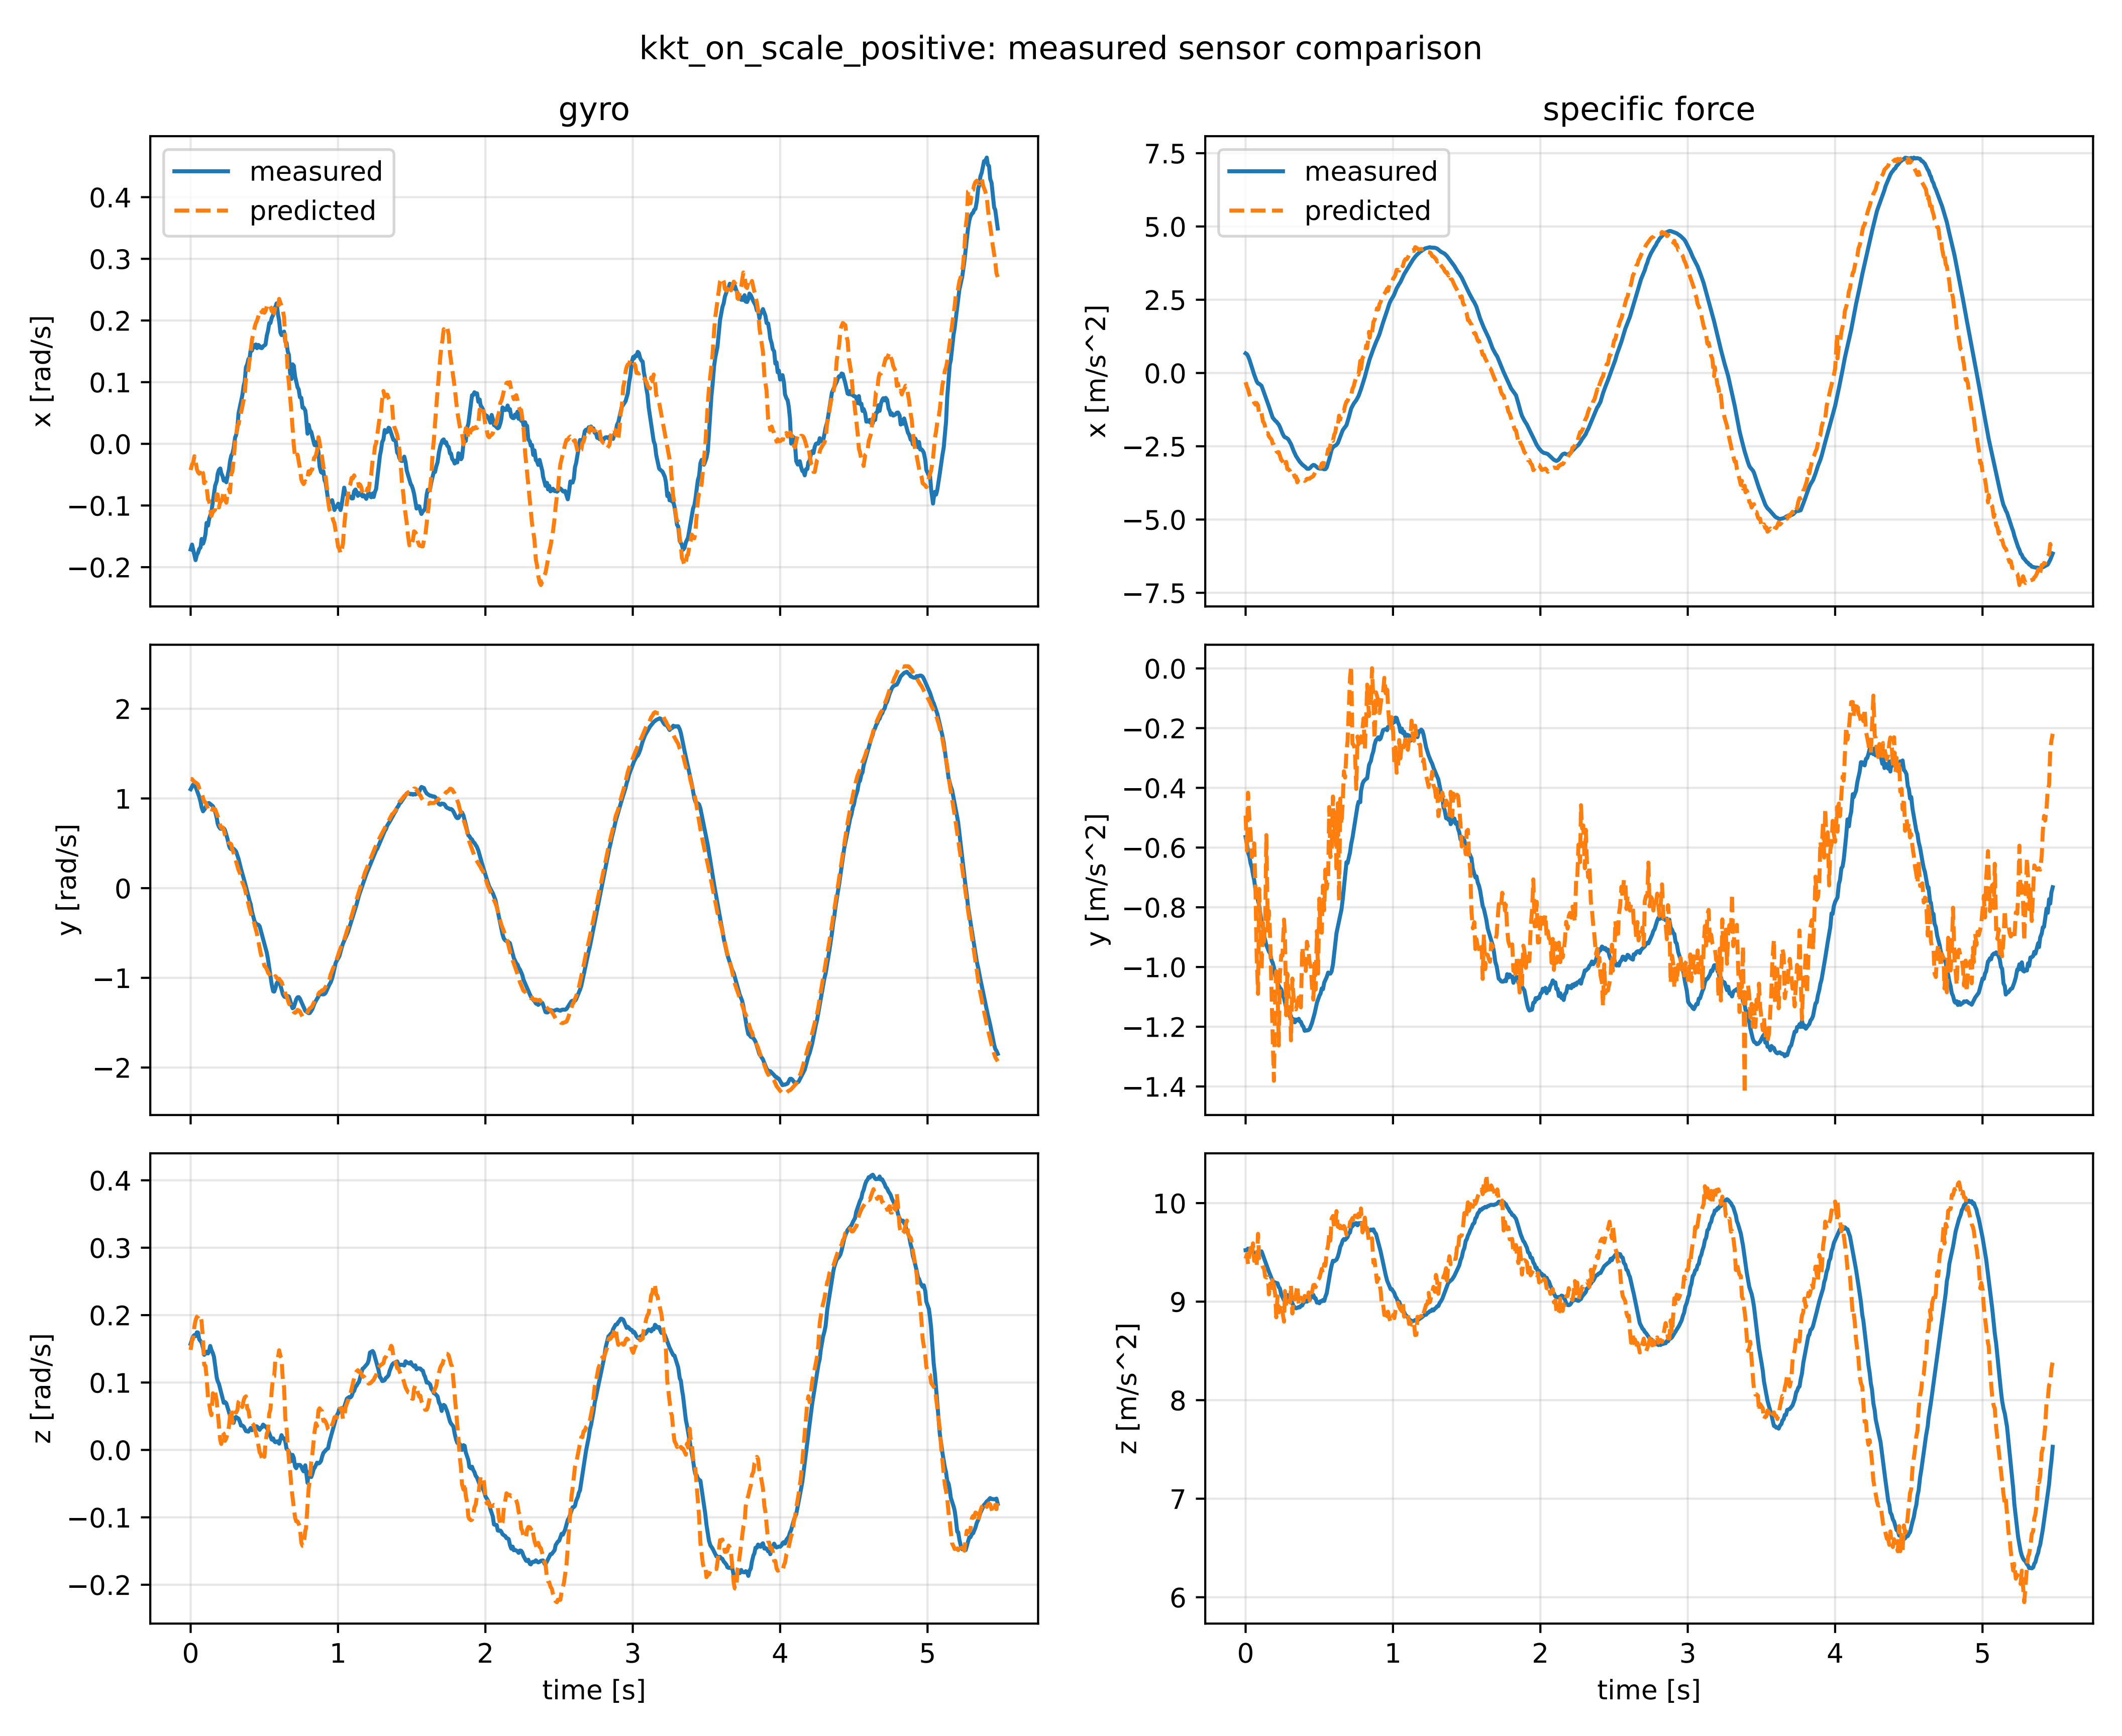
kkt_on_scale_positive: measured sensor comparison
gyro
specific force
measured
predicted
x [rad/s]
y [rad/s]
z [rad/s]
x [m/s^2]
y [m/s^2]
z [m/s^2]
time [s]

kkt_on_scale_positive: nominal -> estimated parameters

```
Case: kkt_on_scale_positive
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  4.09987296   delta  1.74827537

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [0.5373715 0.0603346 0.1680489]   d=[0.4723715 0.0603353 0.1680299]
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [ 0.0603346  0.5200564 -0.2376401]   d=[ 0.0603353  0.4551037 -0.2376402]
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [ 0.1680489 -0.2376401  0.3911509]   d=[ 0.1680299 -0.2376402  0.2621588]

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-0.0102782  0.1034156 -0.0547338]   d=[-0.0082535  0.103446
rotor force effectiveness
  [1. 1. 1. 1.] -> [0.966956  0.8914118 2.0083675 2.0759324]   d=[-0.033044  -0.1085882  1.0083675  1.0759324]

rotor lag [s]  0.199999999
gimbal lag [s]  0.0487666303
```