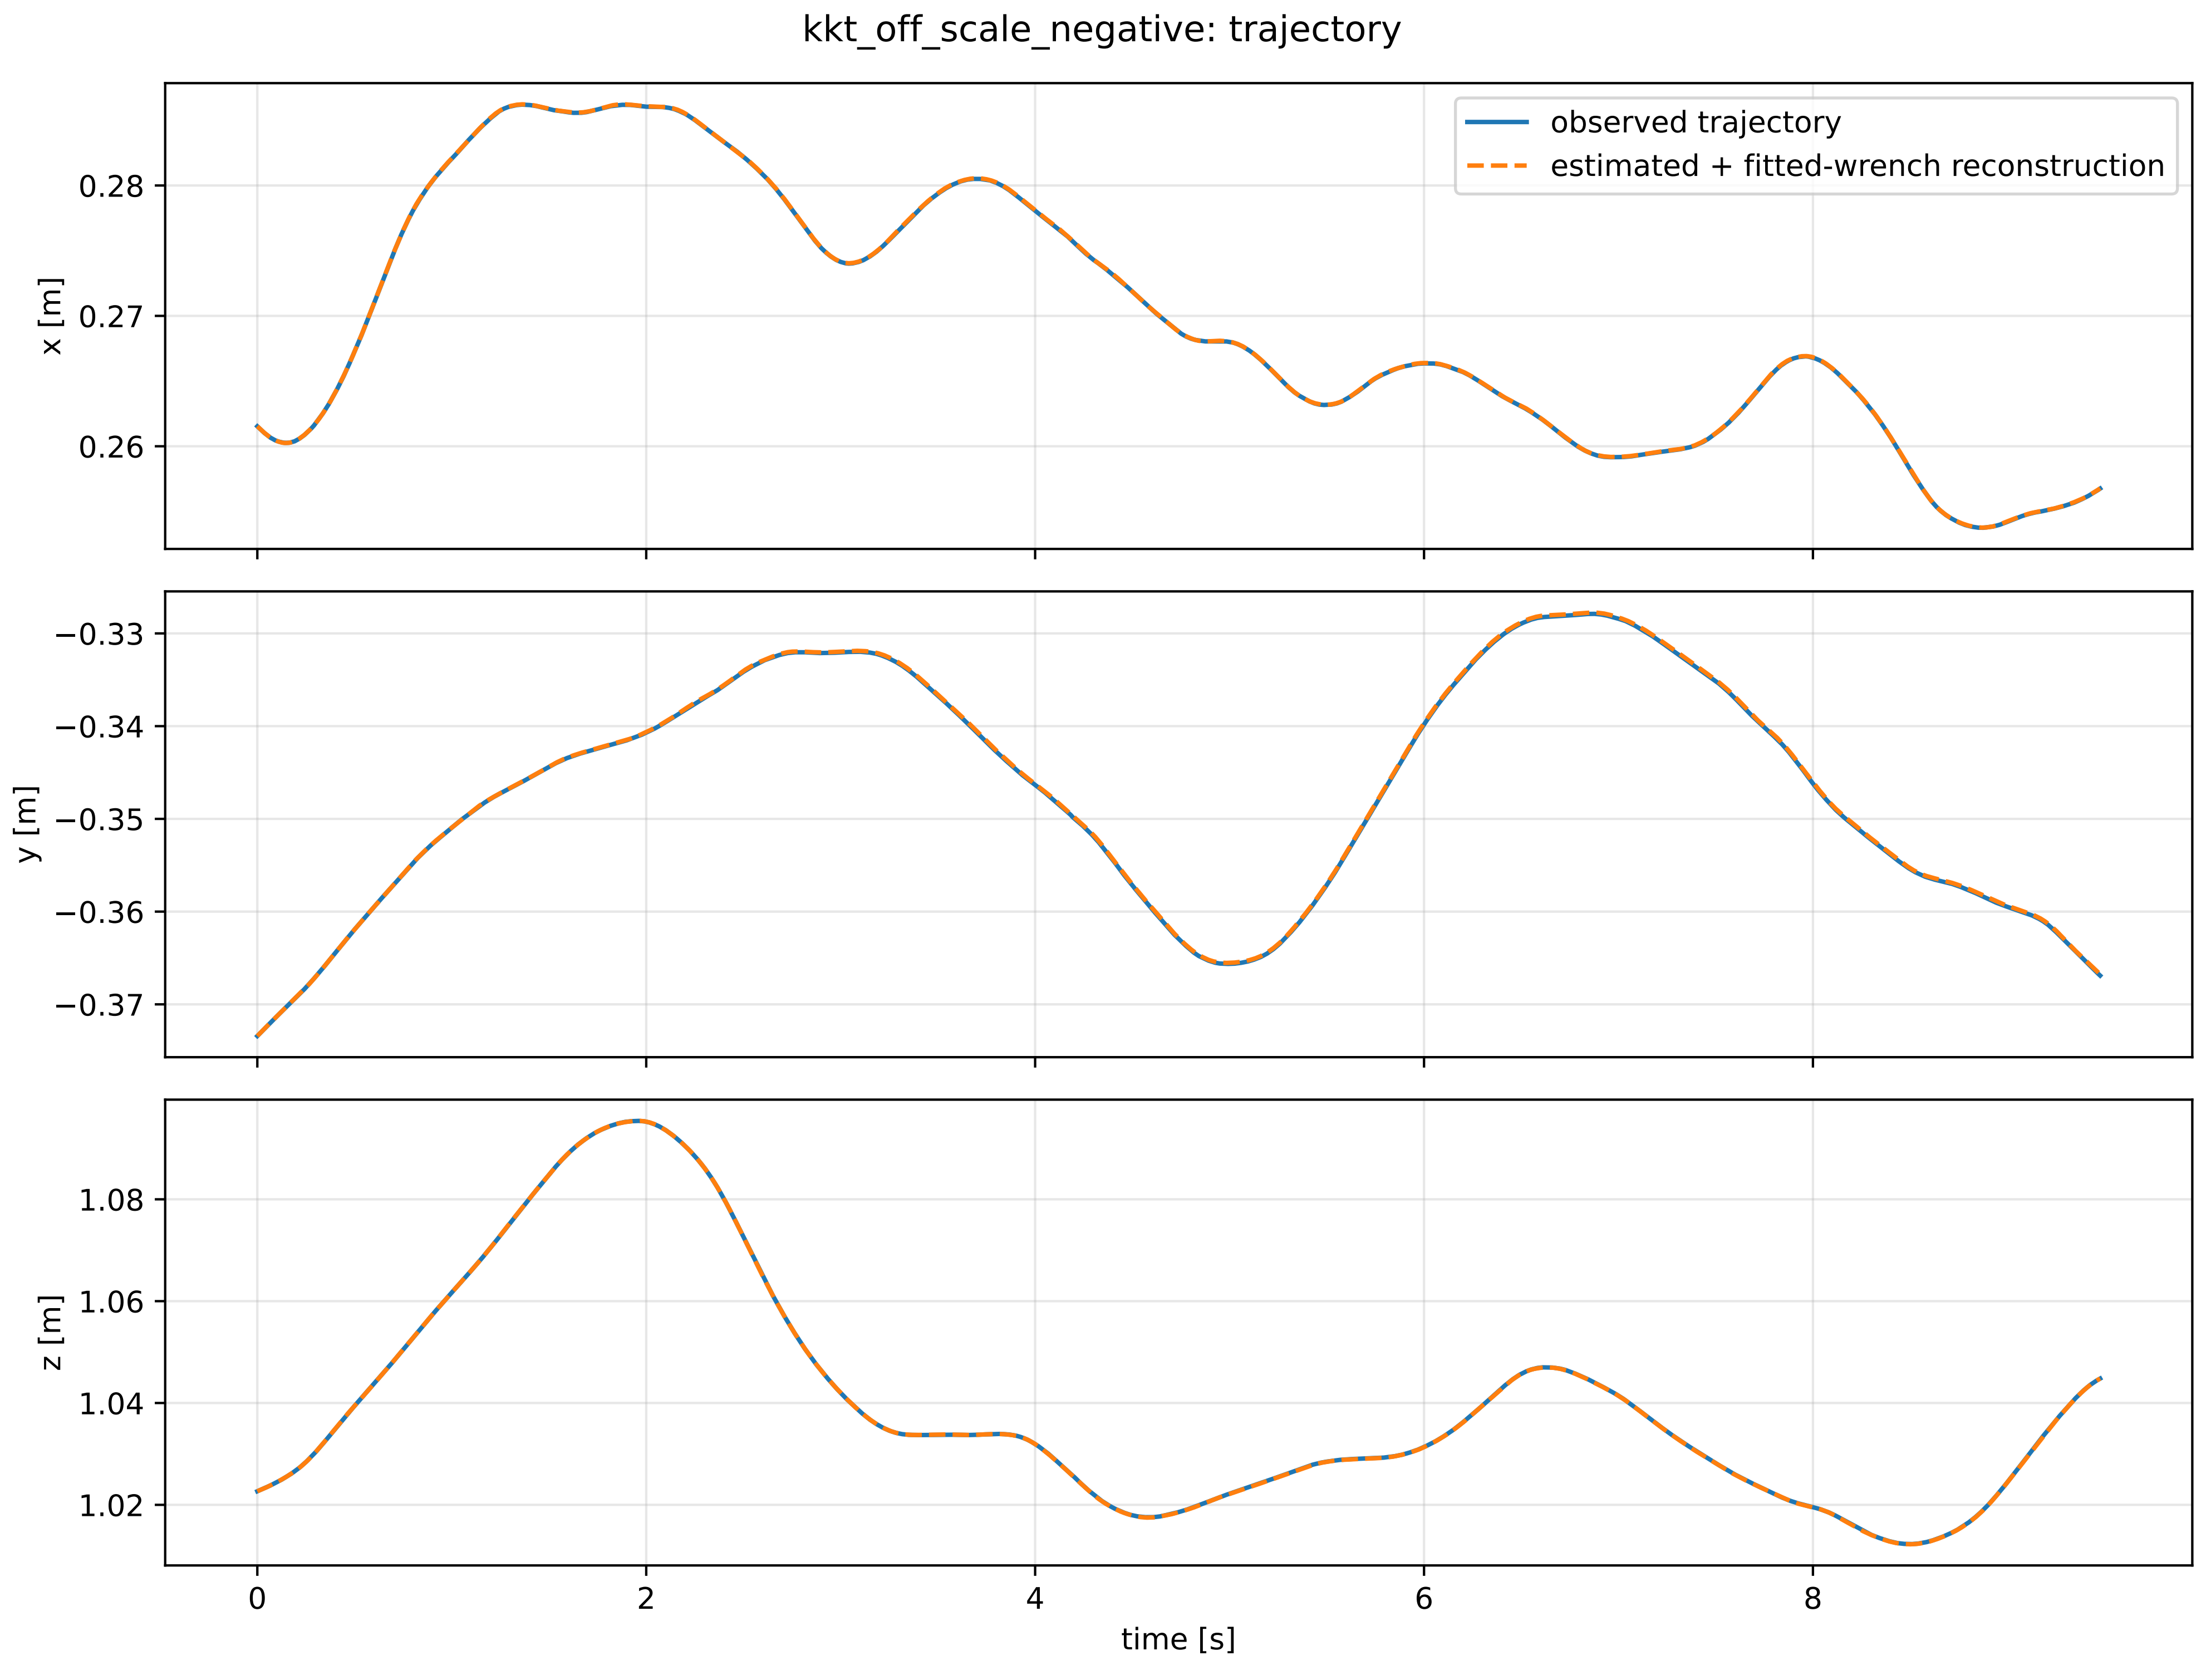

kkt_off_scale_negative: trajectory
observed trajectory
estimated + fitted-wrench reconstruction
x [m]
0.28
0.27
0.26
y [m]
−0.33
−0.34
−0.35
−0.36
−0.37
z [m]
1.08
1.06
1.04
1.02
0
2
4
6
8
time [s]

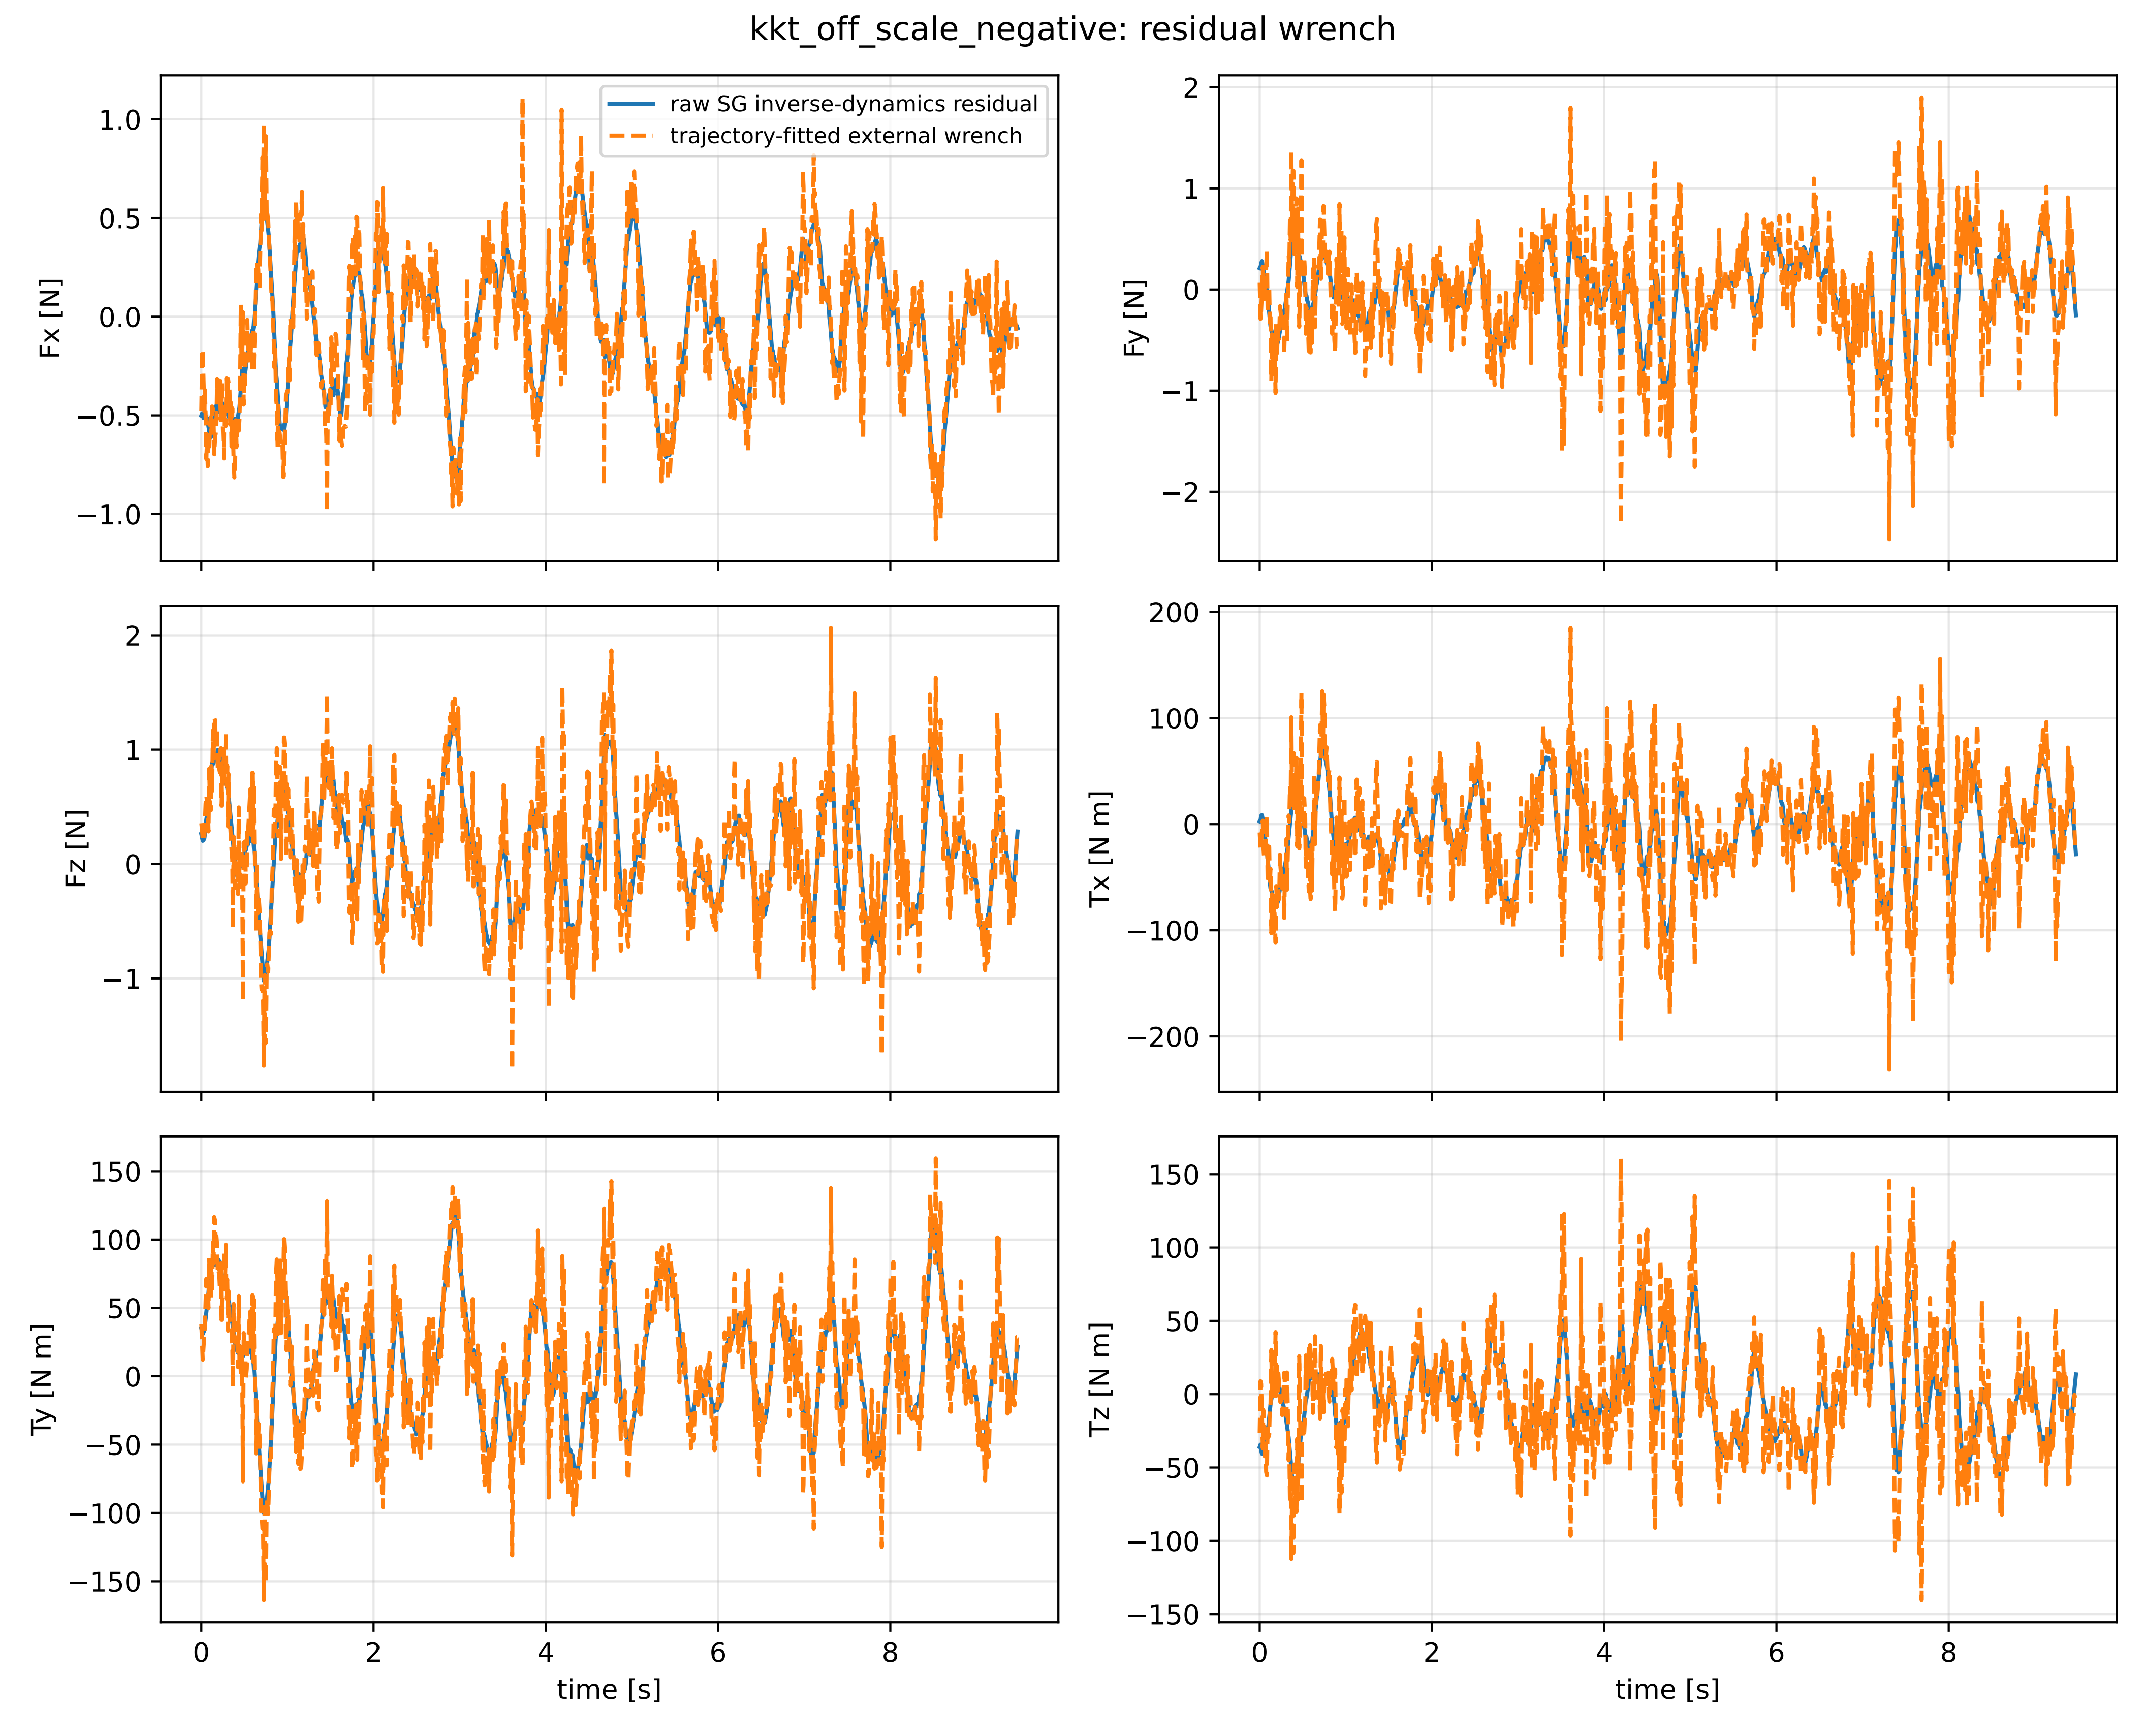

kkt_off_scale_negative: residual wrench
raw SG inverse-dynamics residual
trajectory-fitted external wrench
Fx [N]
Fy [N]
Fz [N]
Tx [N m]
Ty [N m]
Tz [N m]
time [s]

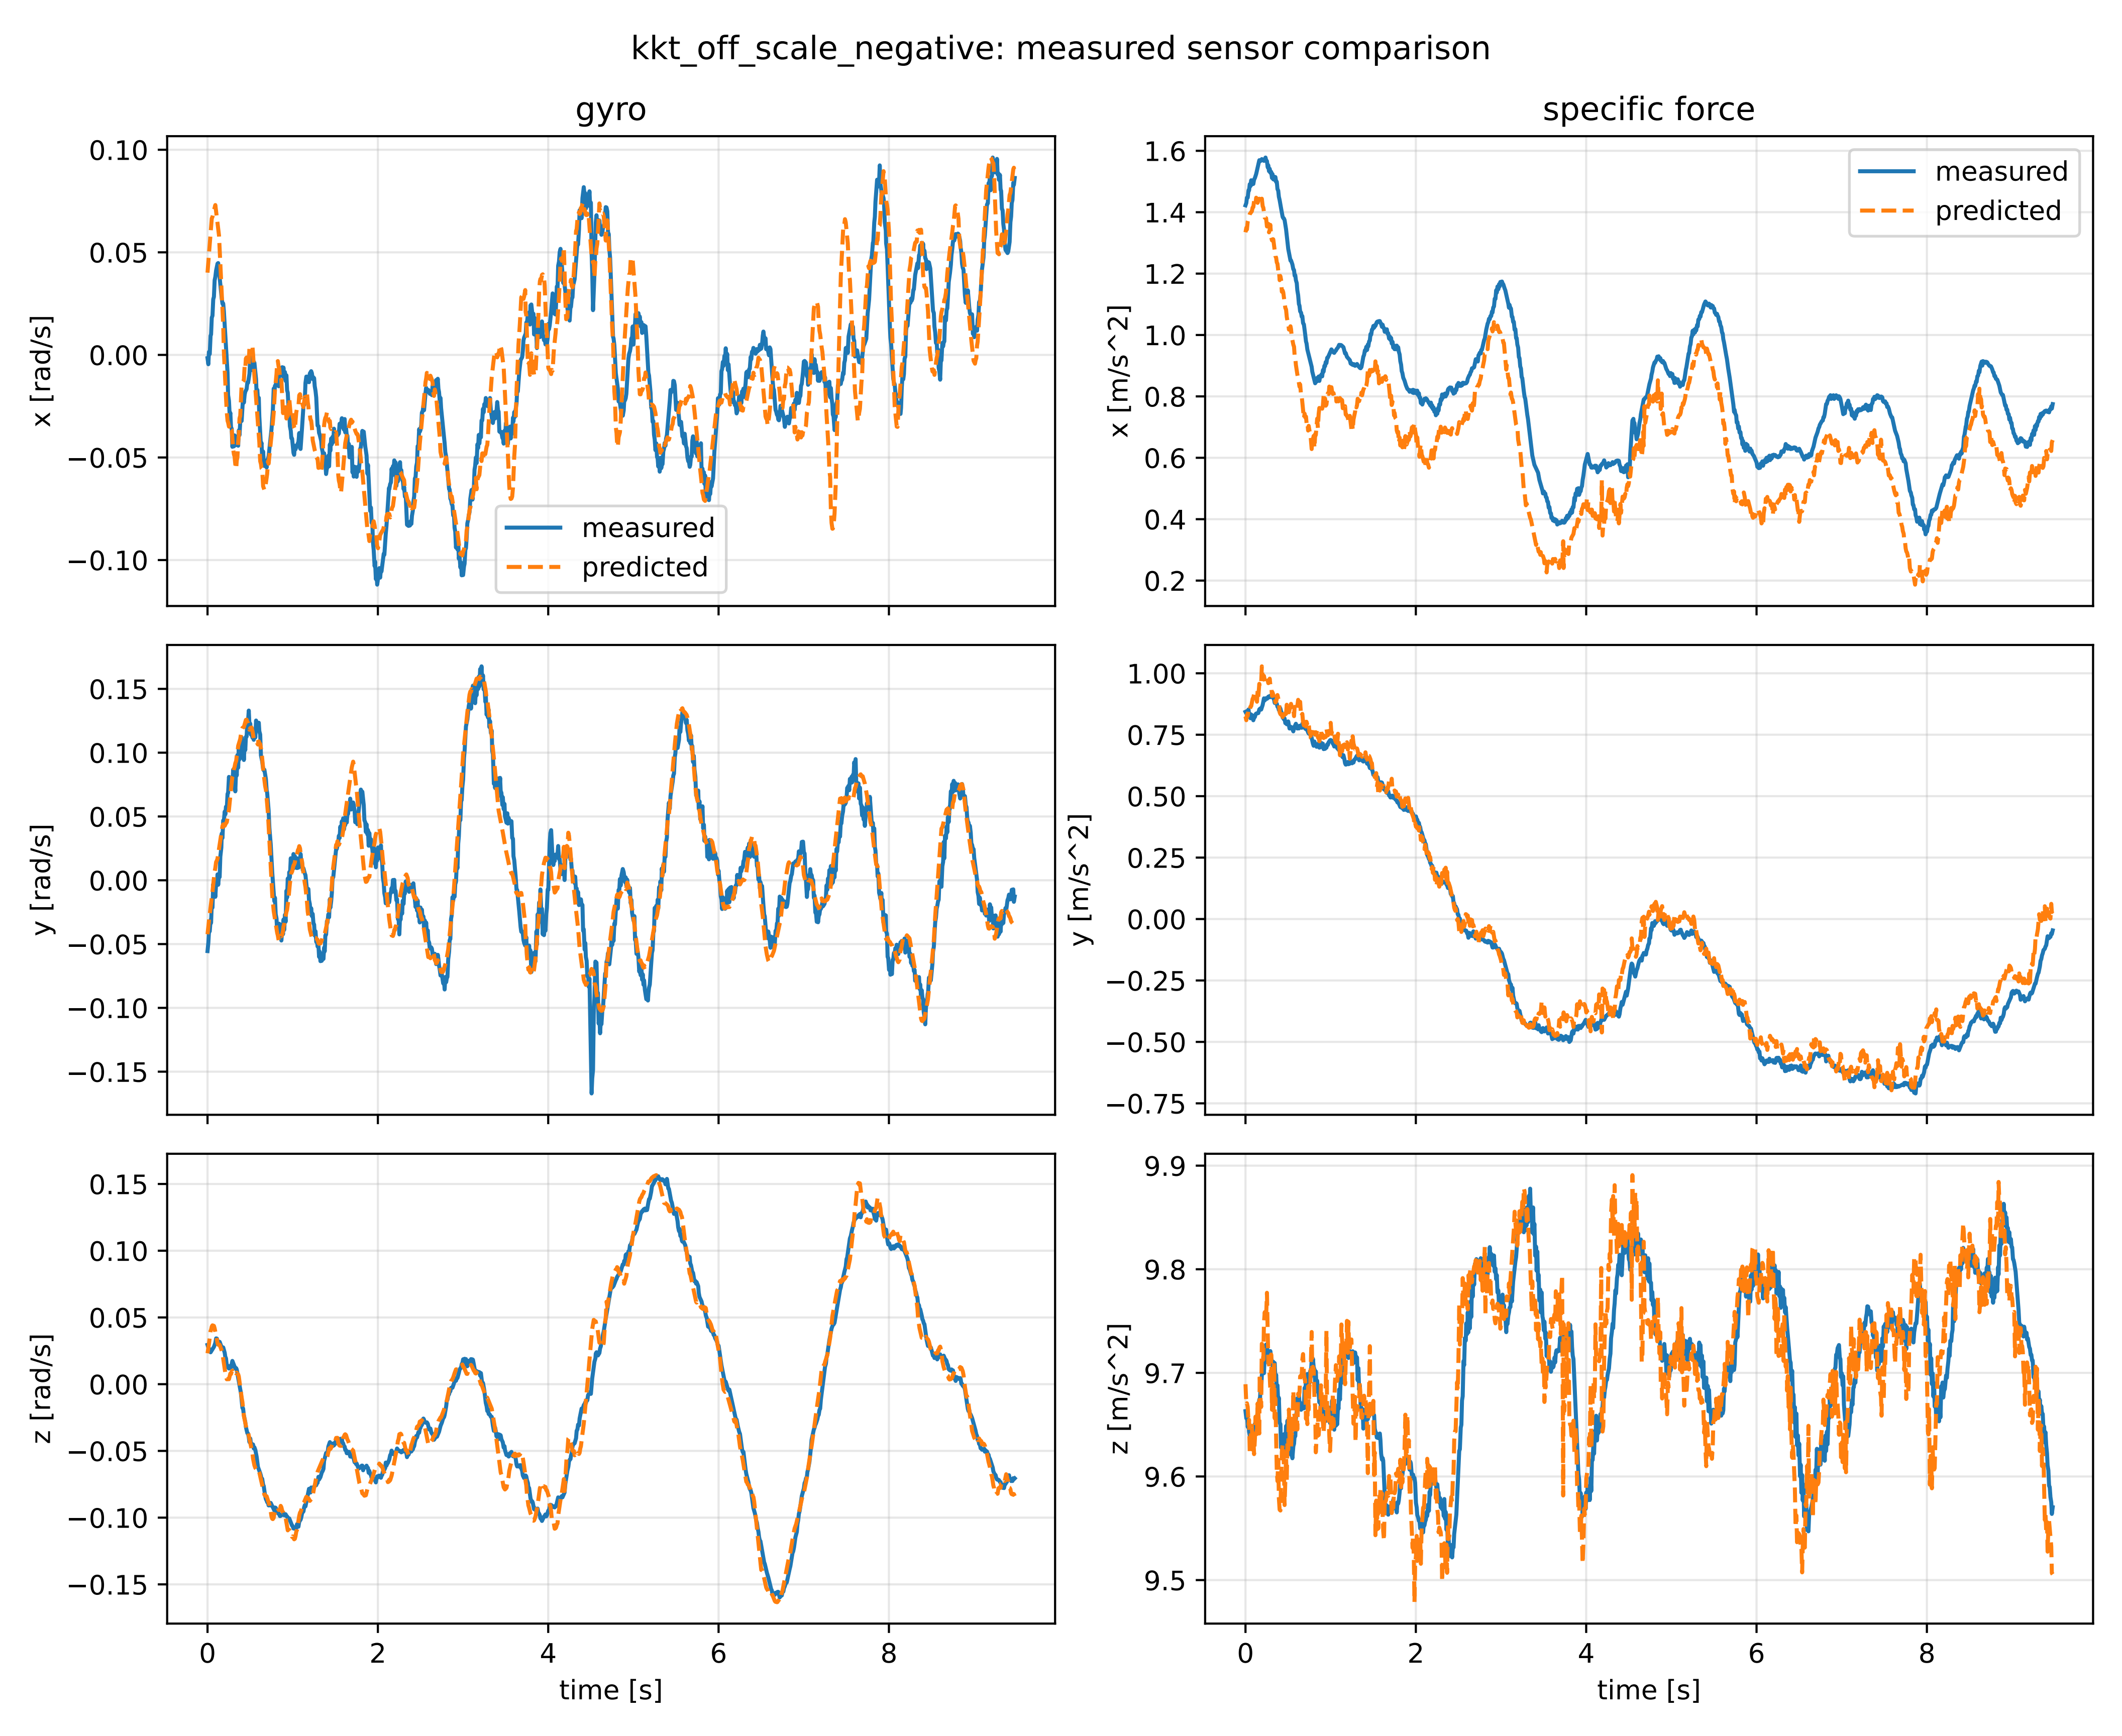
kkt_off_scale_negative: measured sensor comparison
gyro
specific force
x [rad/s]
y [rad/s]
z [rad/s]
x [m/s^2]
y [m/s^2]
z [m/s^2]
time [s]
time [s]
measured
predicted
measured
predicted

kkt_off_scale_negative: nominal -> estimated parameters

```
Case: kkt_off_scale_negative
status: completed (all stages completed)

mass [kg]       nominal  2.35159759   estimated  0.756926002   delta -1.59467159

inertia [kg m^2] (nominal -> estimated; delta)
  [ 6.5000061e-02 -7.2789925e-07  1.9015080e-05] -> [ 82.2313872 -48.8288248 -51.8083765]   d=[ 82.1663872 -48.8288241 -51.80
  [-7.2789925e-07  6.4952656e-02  5.9167305e-08] -> [-48.8288248 105.2141738 -40.9903153]   d=[-48.8288241 105.1492211 -40.99
  [1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-51.8083765 -40.9903153 100.3703754]   d=[-51.8083955 -40.9903154 100.2413

CoG [m]       [-2.0247086e-03 -3.0526579e-05  9.5097496e-03] -> [-1.3324326 -0.9585076 -1.1045125]   d=[-1.3304079 -0.958477
rotor force effectiveness
  [1. 1. 1. 1.] -> [0.1634407 0.1727853 0.2896329 0.3951295]   d=[-0.8365593 -0.8272147 -0.7103671 -0.6048705]

rotor lag [s]  0.199999857
gimbal lag [s]  0.0503390711
```