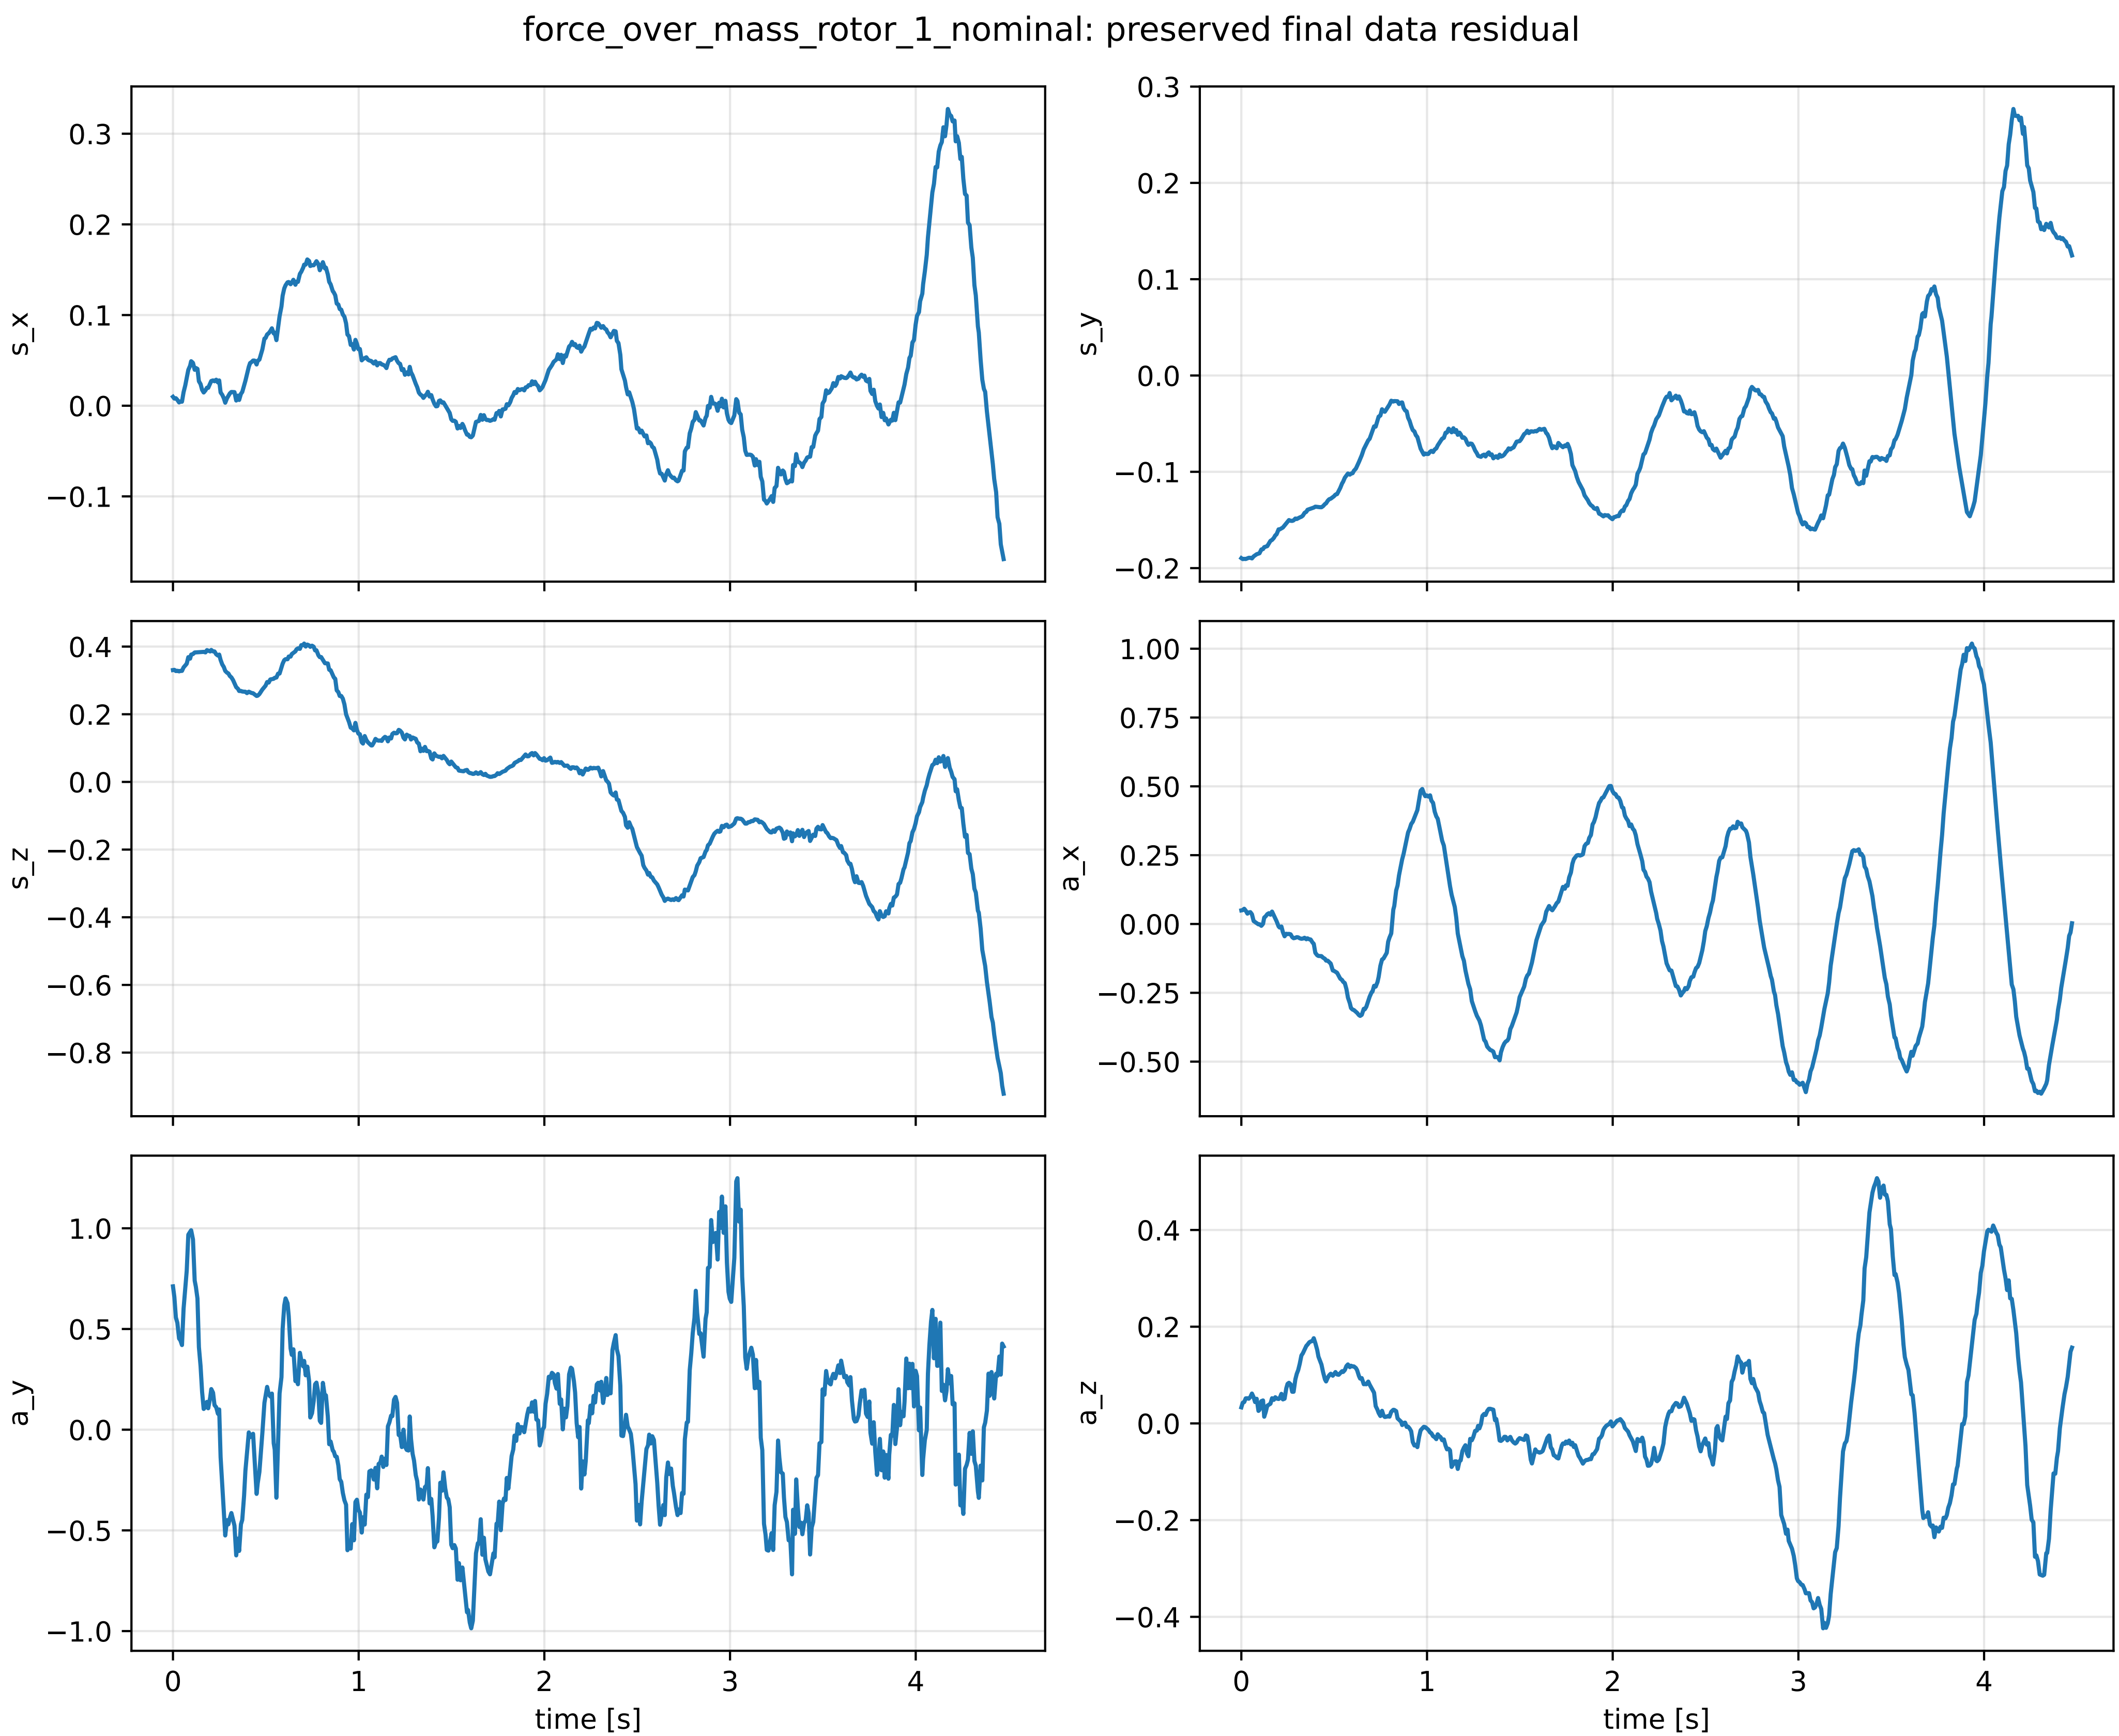
force_over_mass_rotor_1_nominal: preserved final data residual
s_x
s_y
s_z
a_x
a_y
a_z
time [s]
time [s]

force_over_mass_rotor_1_nominal: preserved strict point estimate

```
optimization_status: completed
postfit_uncertainty_status: failed
rotor lag [s]: 0.254037737846
data objective: 106.739780613

mass [kg]: 0.279139047914
CoG [m]: [ 0.28999323 -8.07356856 -0.13589304]
force effectiveness: [0.11870188 0.16400687 0.08355539 0.04064115]
J/m [m^2]:
[[ 1.04348898e+07  3.20869754e+05  5.94299123e+03]
 [ 3.20869754e+05  1.34484684e+04 -1.93203126e+05]
 [ 5.94299123e+03 -1.93203126e+05  1.04411814e+07]]
```

force_over_mass_rotor_1_nominal: optional parameter-prior audit

```
Optional physical parameter prior

The parameter prior is optional external information. The default estimator is prior-free.
name: pseudo_condition_force_over_mass_rotor_1_nominal
role: pseudo_conditioning_ablation
source: /home/leus/catkin_ws/src/ProbTF-demo/ros/examples/grape-param-estim/minimal/config/priors/pseudo_conditioning/scalar/force_over_mass
SHA256: 6d6d7476c7c2cc90b6dbb115ea73393bd5979488f12a4de1ccf810600f0d2db0

data objective:  106.739780613
prior objective: 2.01367623176e-09
total objective: 106.739780615

This configuration uses an intentionally tight artificial standard deviation
for an ablation-style pseudo-conditioning experiment; it is not a calibrated
physical uncertainty.

factor: force_over_mass_rotor_1_nominal (force_effectiveness_over_mass)
  components: rotor_1
  target: [0.42524282]
  std:    [1.e-05]
  final:  [0.42524282]
  error:  [-6.3461425e-10]
  standardized residual: [-6.3461425e-05]
  factor objective: 2.01367623176e-09
```

force_over_mass_rotor_1_nominal: post-fit diagnostic failure

```
post-fit uncertainty unavailable

stage: residual_wrench_uncertainty
exception: RuntimeError
message: wrench closure maps are not machine-precision inverses

No covariance was fabricated and the closure tolerance was not relaxed.
```