
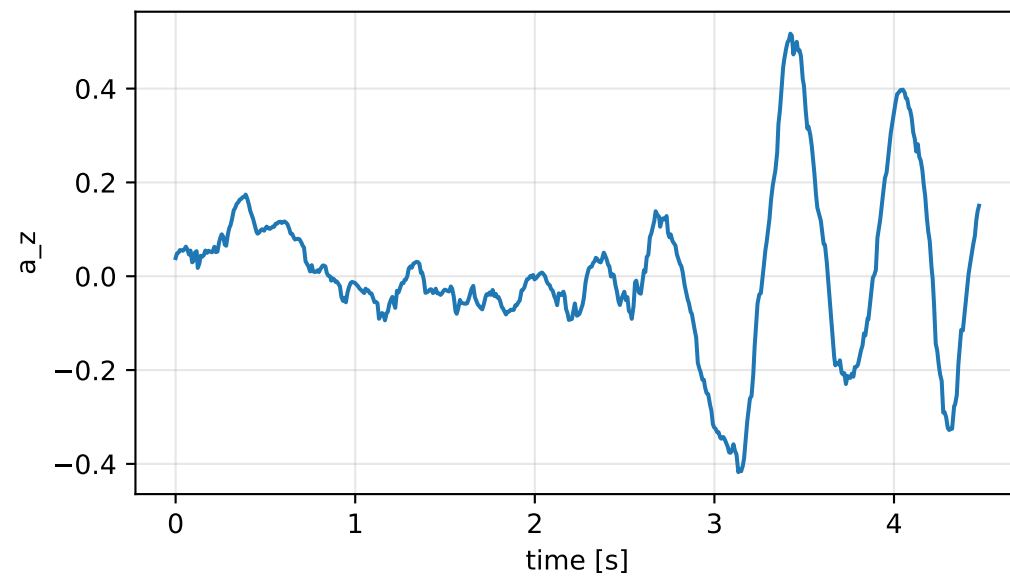
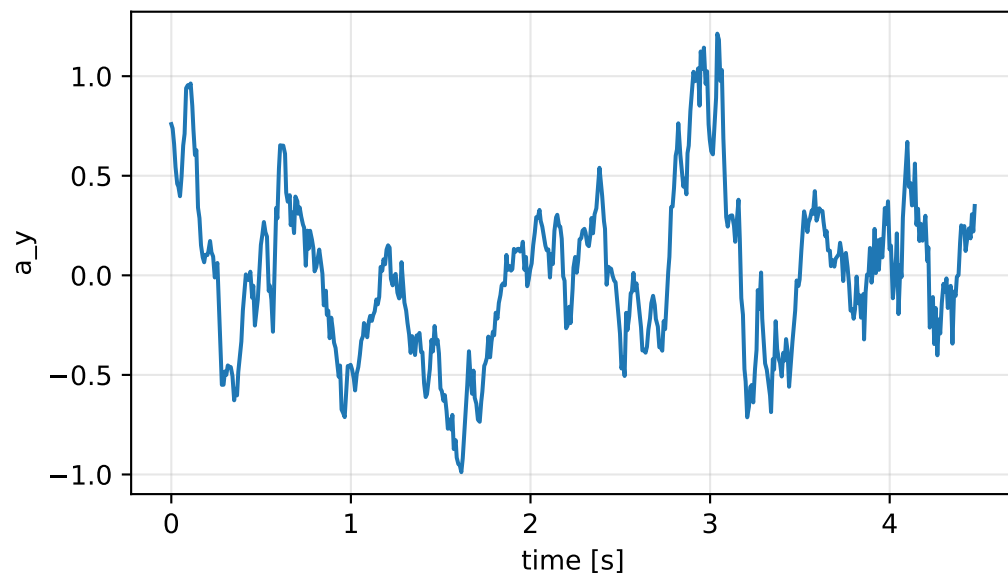
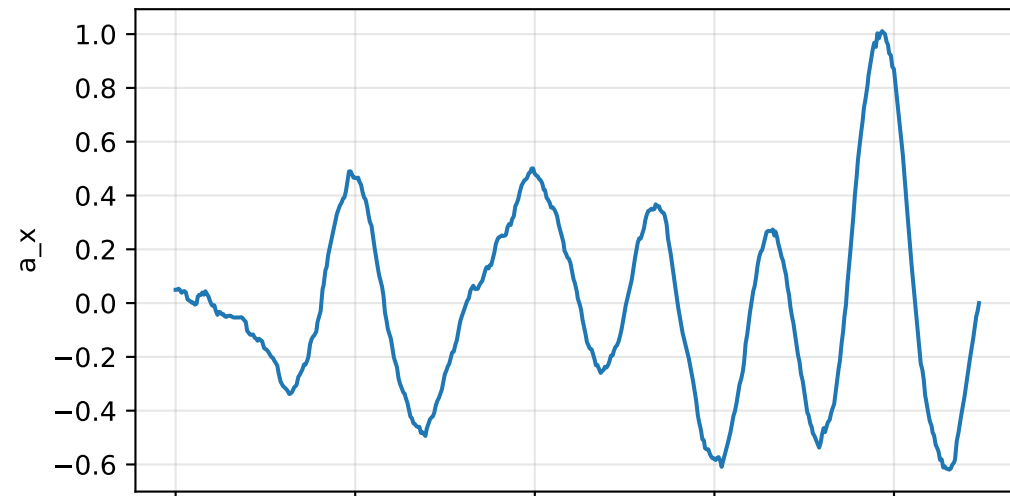
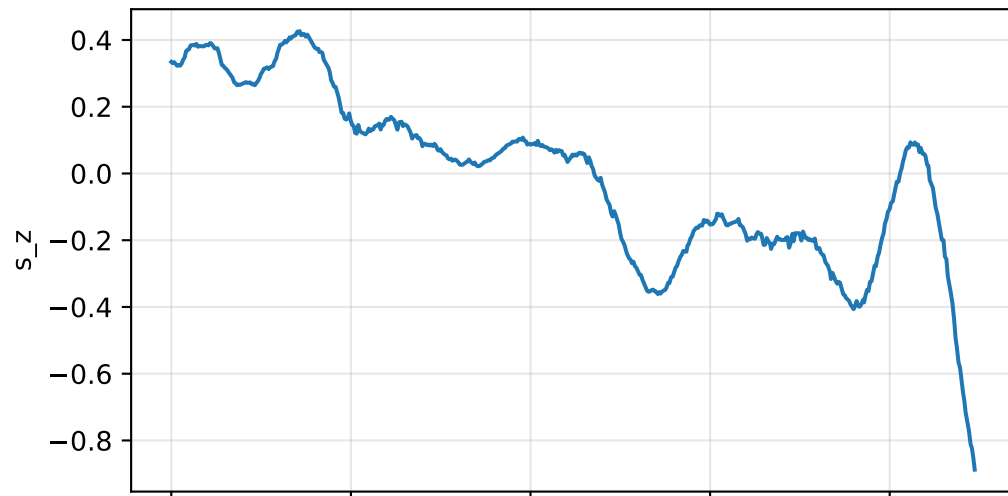
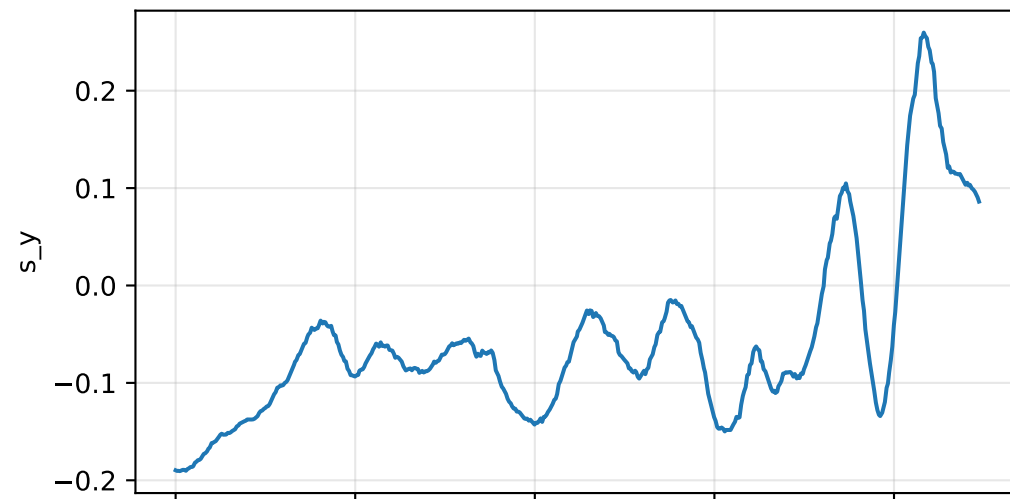


force_over_mass_rotor_3_nominal: preserved final data residual

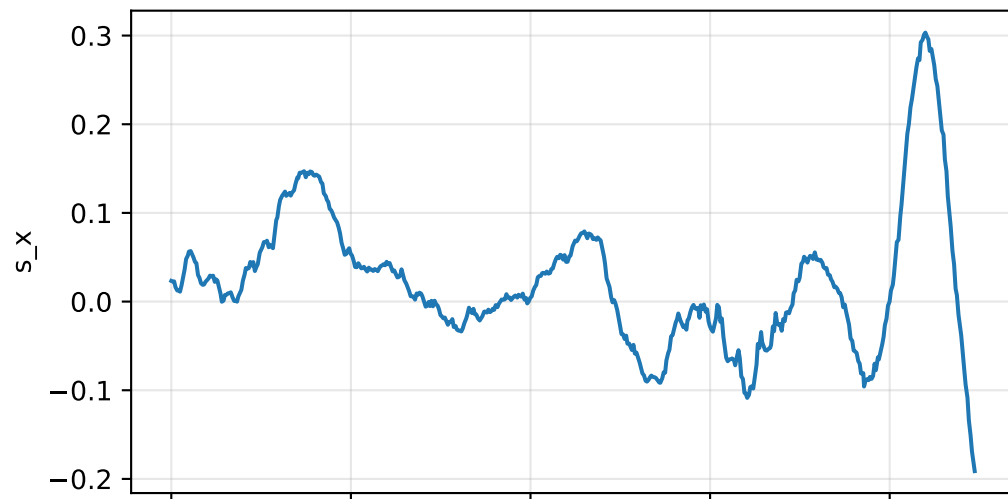

force_over_mass_rotor_3_nominal: preserved strict point estimate

optimization_status: completed
postfit_uncertainty_status: failed
rotor_lag [s]: 0.260476469994
data objective: 107.975784588

mass [kg]: 0.354909324857
CoG [m]: [0.32519366 -7.95346879 -0.16153924]
force effectiveness: [0.10647735 0.21894563 0.15092264 0.04370845]
J/m [m²]:
[[7.04180032e+06 2.08845494e+05 4.48628804e+03]
[2.08845494e+05 9.44473466e+03 -1.51197336e+05]
[4.48628804e+03 -1.51197336e+05 7.04474919e+06]]

force_over_mass_rotor_3_nominal: optional parameter-prior audit

Optional physical parameter prior

The parameter prior is optional external information. The default estimator is prior-free.

name: pseudo_condition_force_over_mass_rotor_3_nominal

role: pseudo_conditioning_ablation

source: /home/leus/catkin_ws/src/ProbTF-demo/ros/examples/grape-param-estim/minimal/config/priors/pseudo_conditioning/scalar/force_over_mass

SHA256: 6b7aab340fa6fd878752d7c8d399d9306f6b9fcfbe1938694085b3ade666560d

data objective: 107.975784588

prior objective: 4.23535860895e-14

total objective: 107.975784588

This configuration uses an intentionally tight artificial standard deviation for an ablation-style pseudo-conditioning experiment; it is not a calibrated physical uncertainty.

factor: force_over_mass_rotor_3_nominal (force_effectiveness_over_mass)

components: rotor_3

target: [0.42524282]

std: [1.e-05]

final: [0.42524282]

error: [2.91044966e-12]

standardized residual: [2.91044966e-07]

factor objective: 4.23535860895e-14

force_over_mass_rotor_3_nominal: post-fit diagnostic failure

post-fit uncertainty unavailable

stage: residual_wrench_uncertainty

exception: RuntimeError

message: wrench closure maps are not machine-precision inverses

No covariance was fabricated and the closure tolerance was not relaxed.