
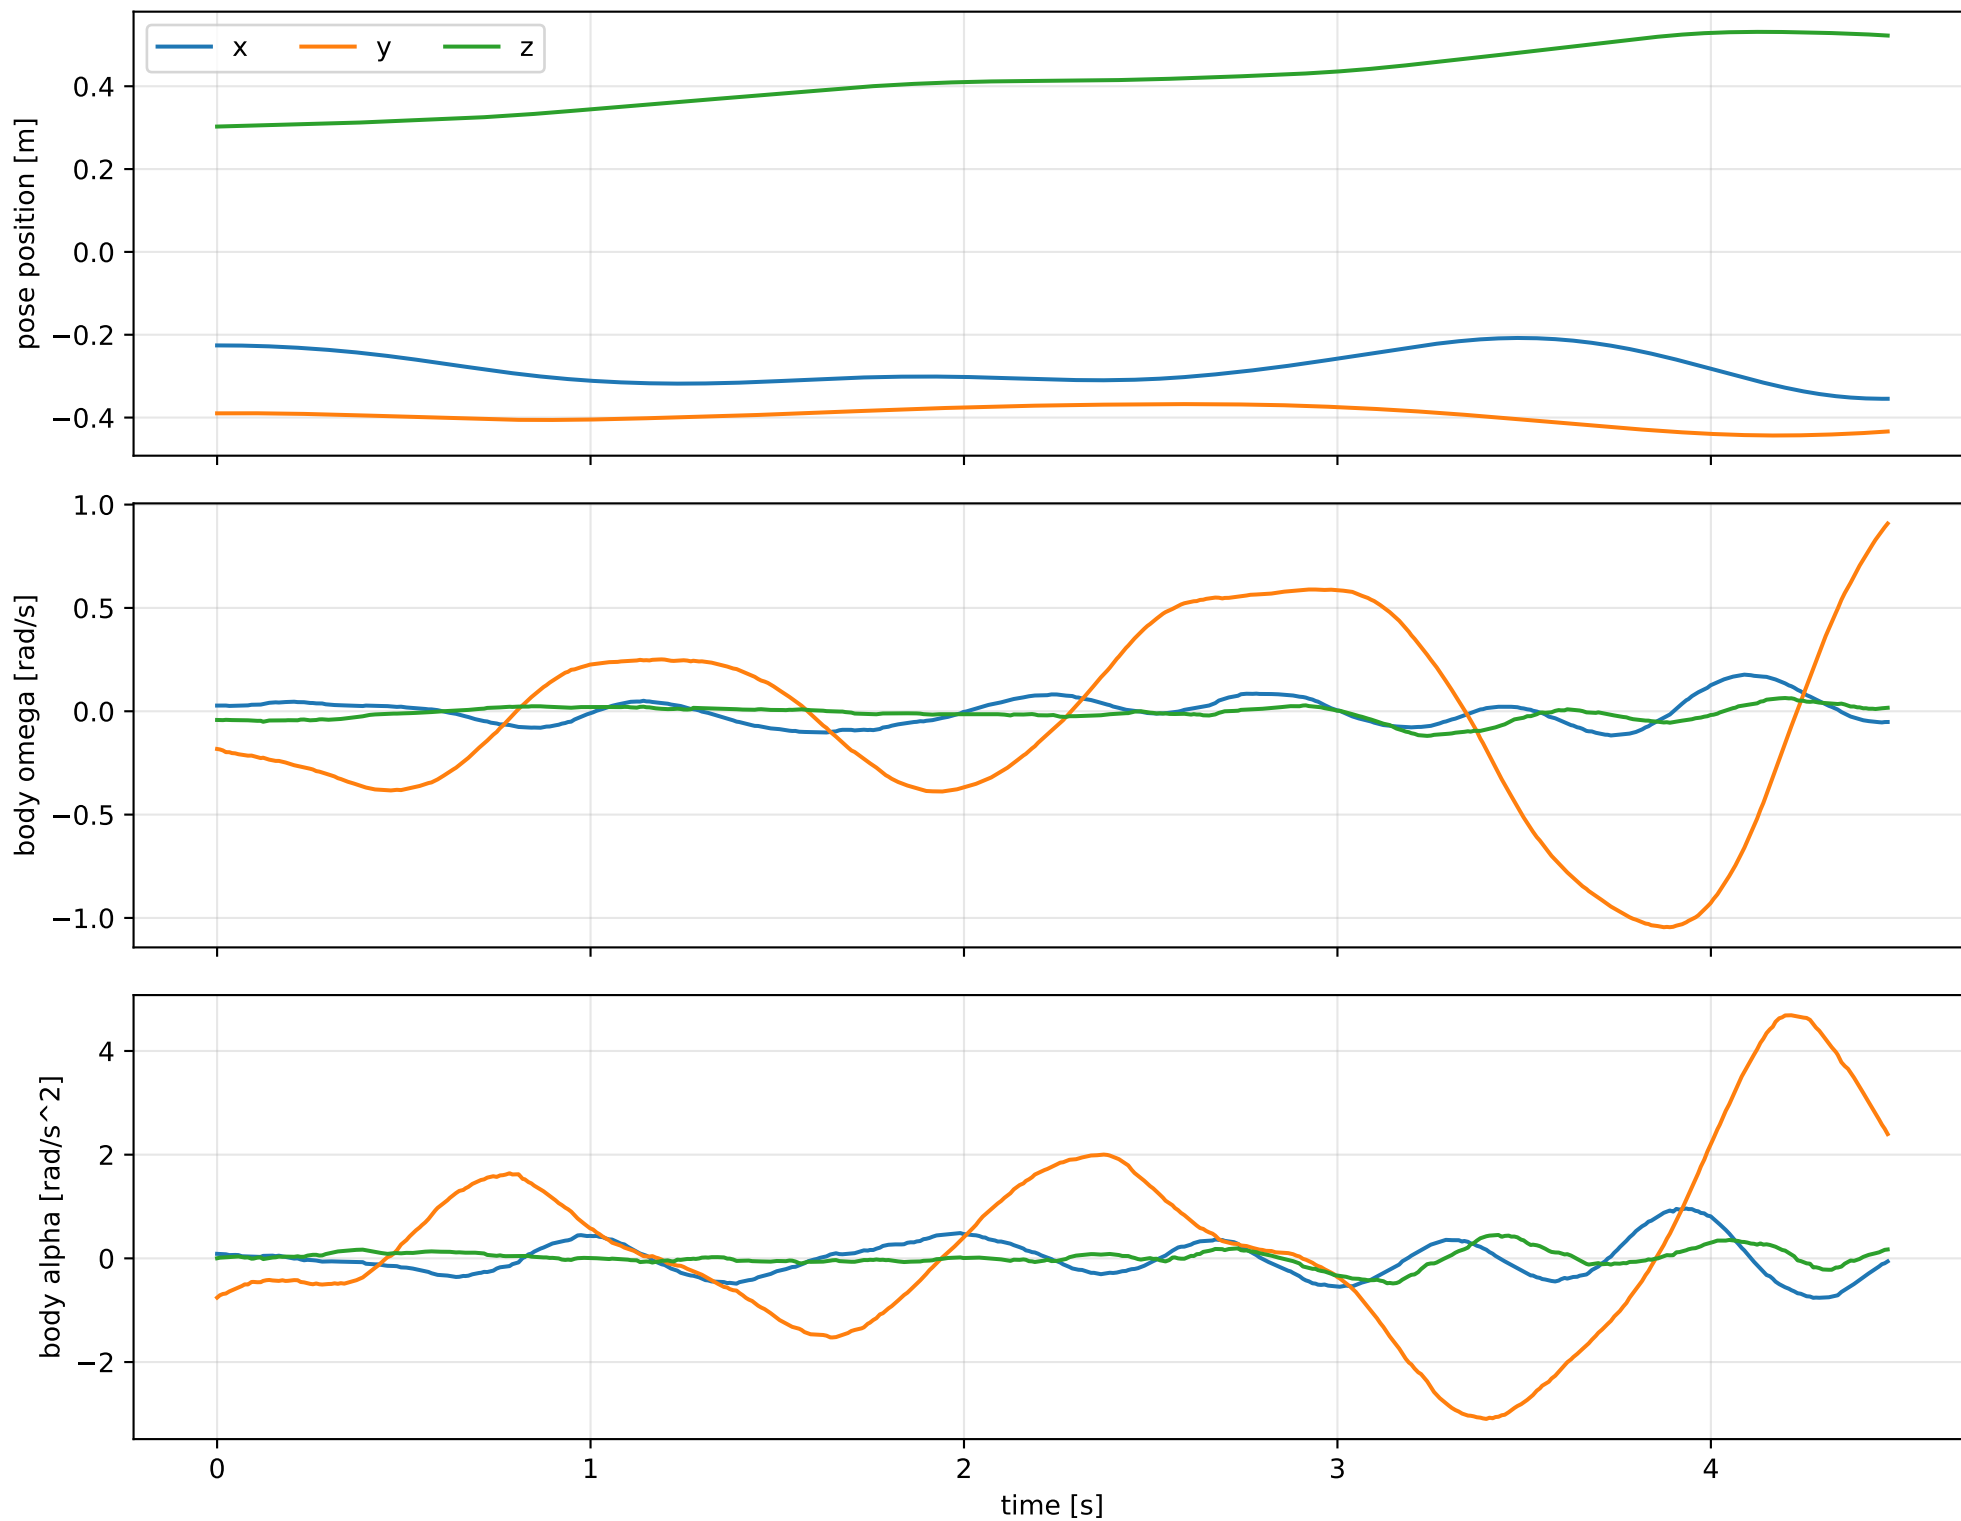
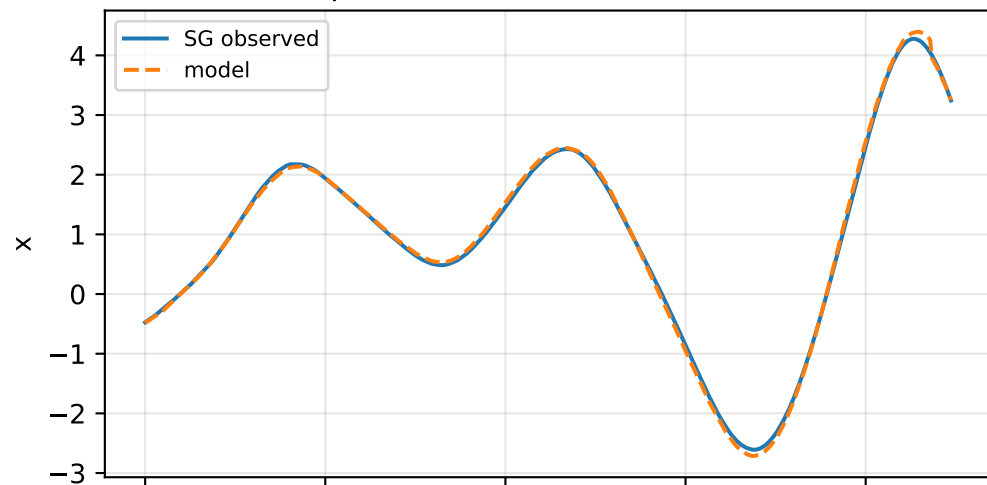
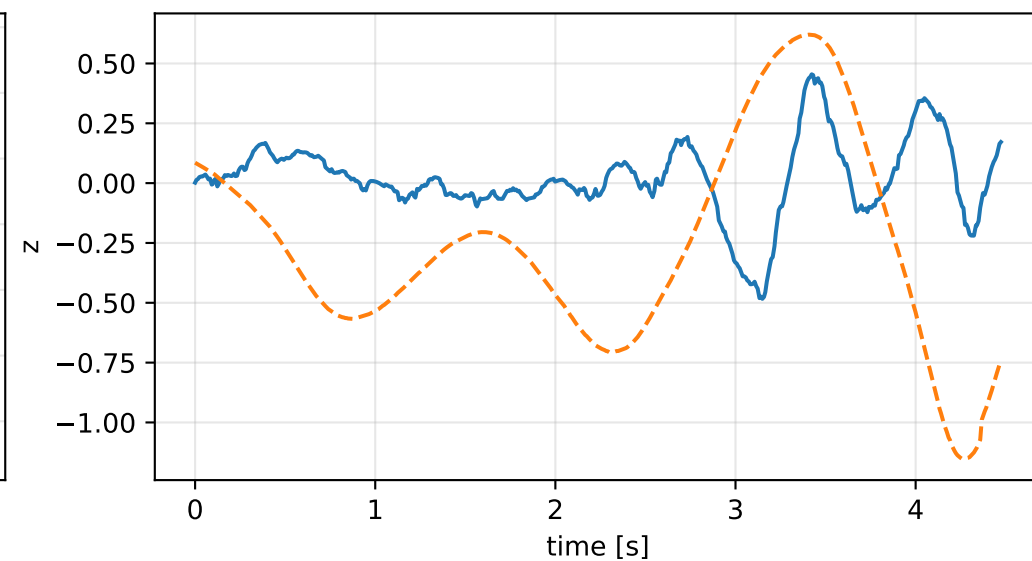
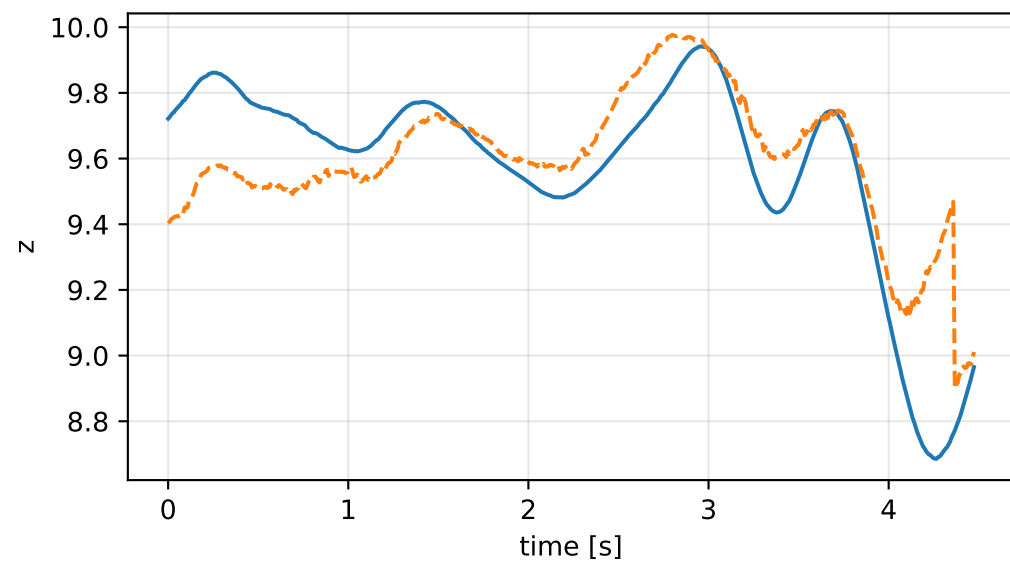
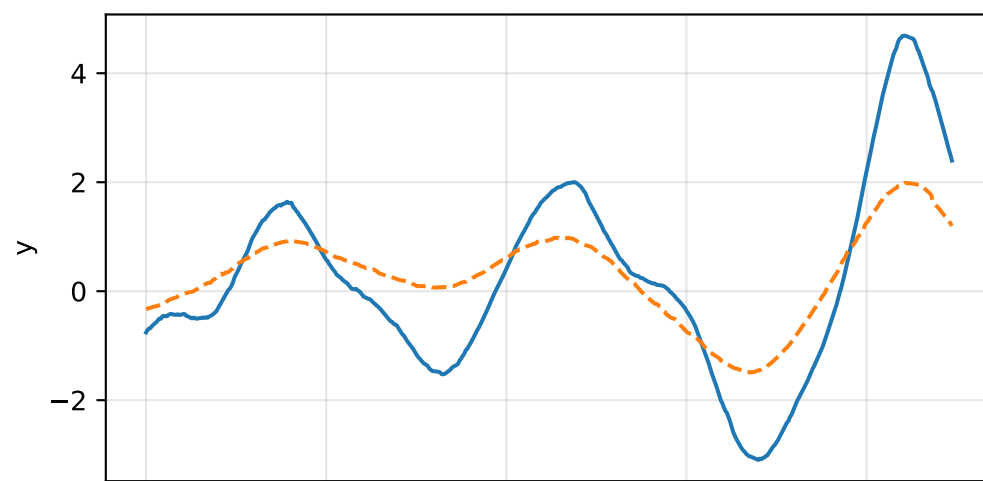
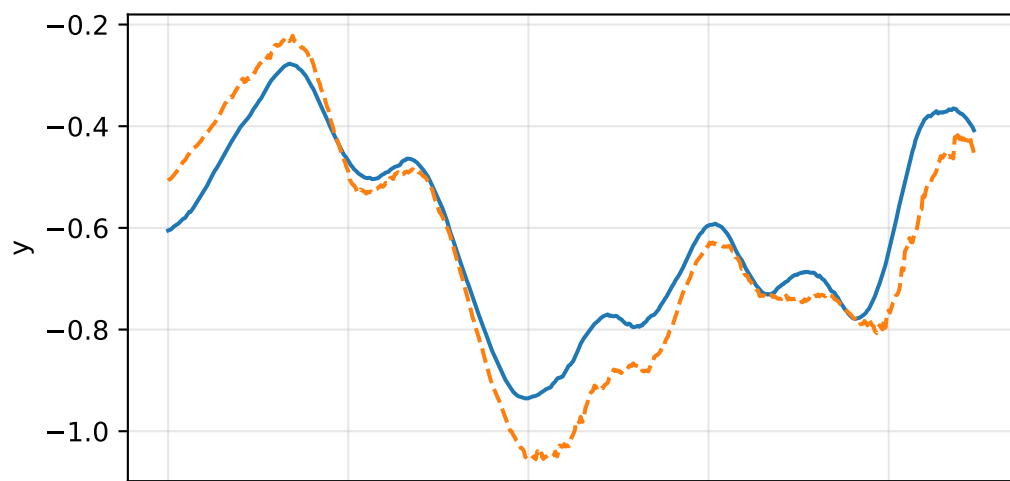


cov_full_no_R_uncertainty_in_s: SG trajectory and derived motion

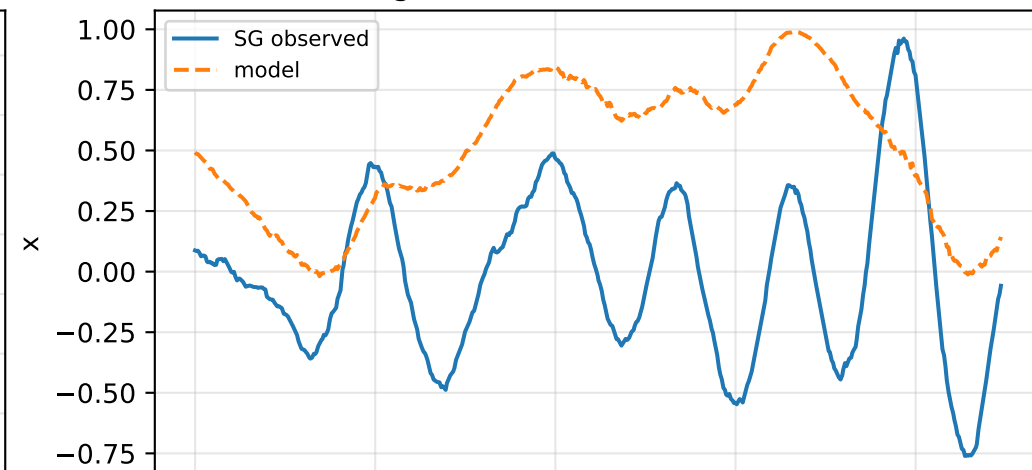


cov_full_no_R_uncertainty_in_s: acceleration residual objective


specific acceleration [m/s²]angular acceleration [rad/s²]

cov_full_no_R_uncertainty_in_s: gimbal measurement audit (objective=measured_sg)


gimbal 1: RMSE=0.027, max=0.07529 rad

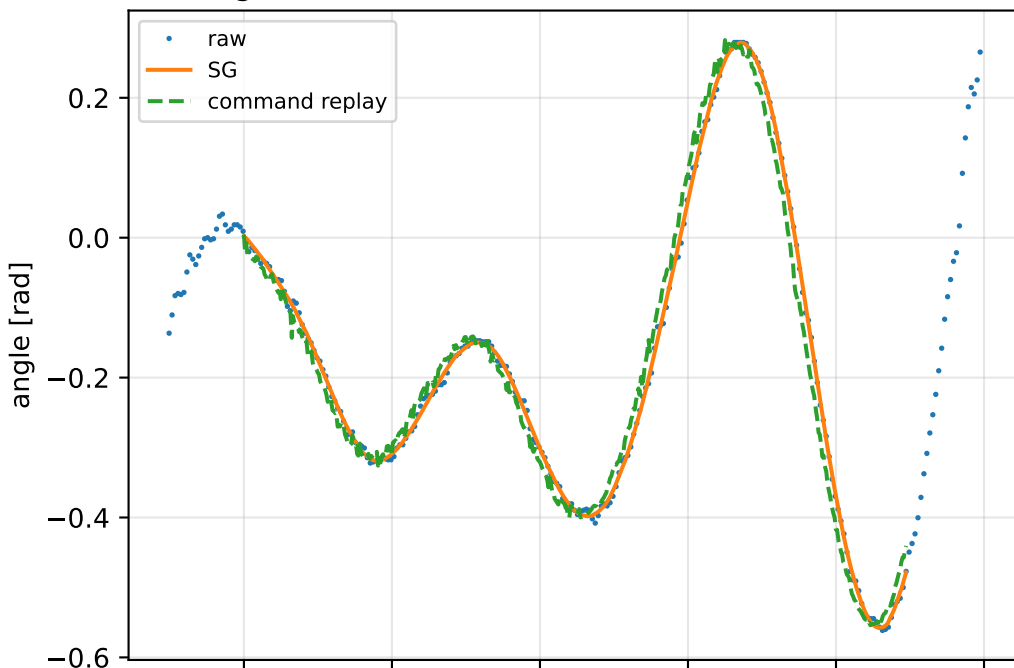


gimbal 2: RMSE=0.03107, max=0.08239 rad

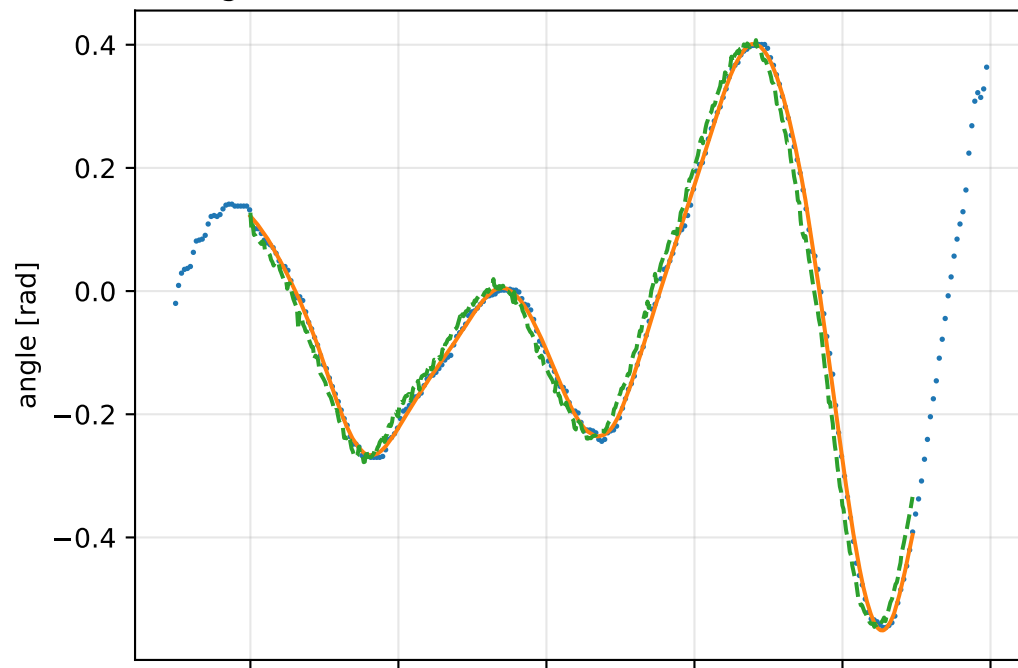

gimbal 3: RMSE=0.03106, max=0.08682 rad

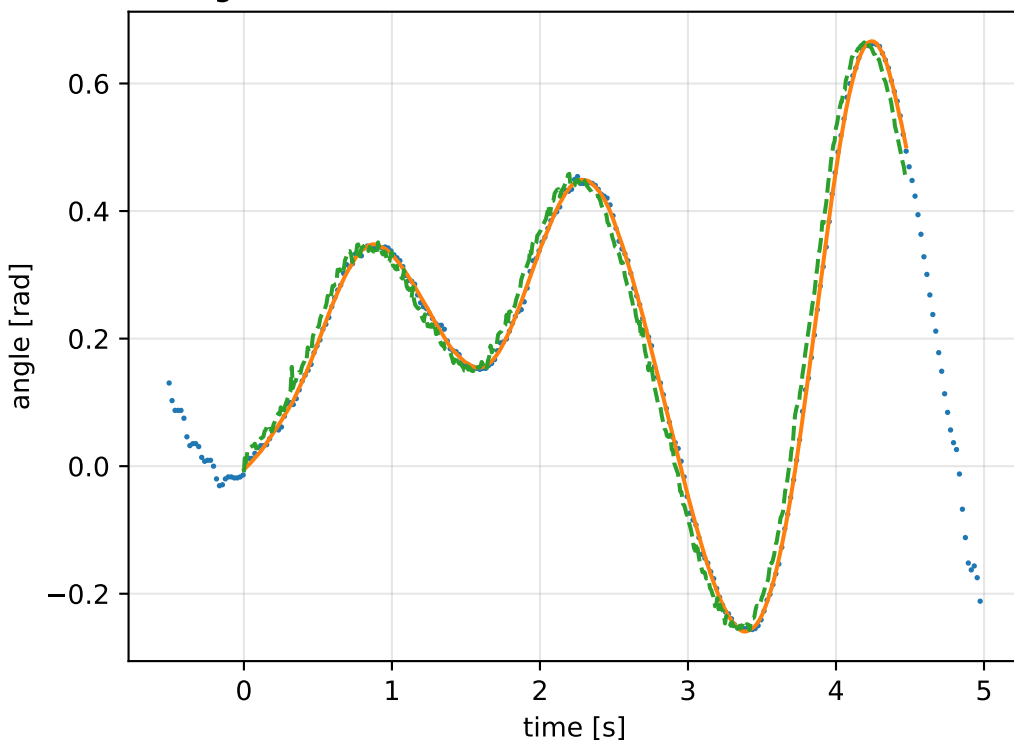


gimbal 4: RMSE=0.02598, max=0.07261 rad





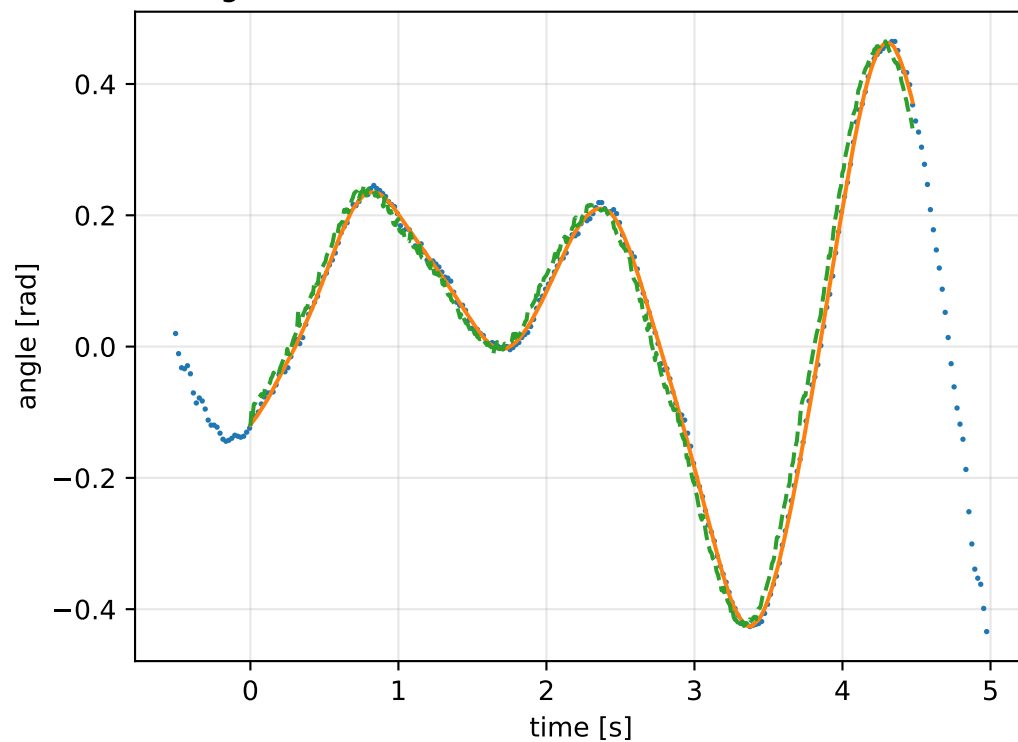


cov_full_no_R_uncertainty_in_s: IMU comparison (diagnostic only)


gyro [rad/s]

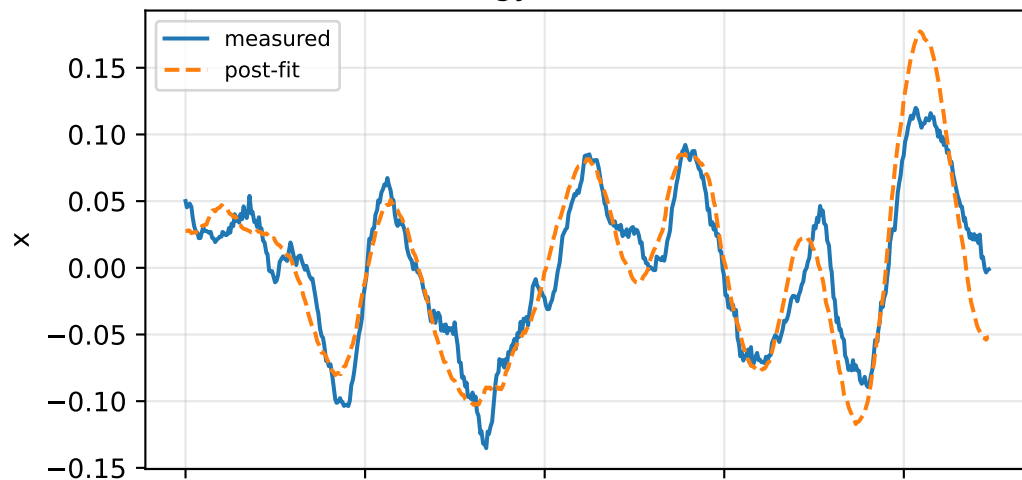


specific force [m/s^2]

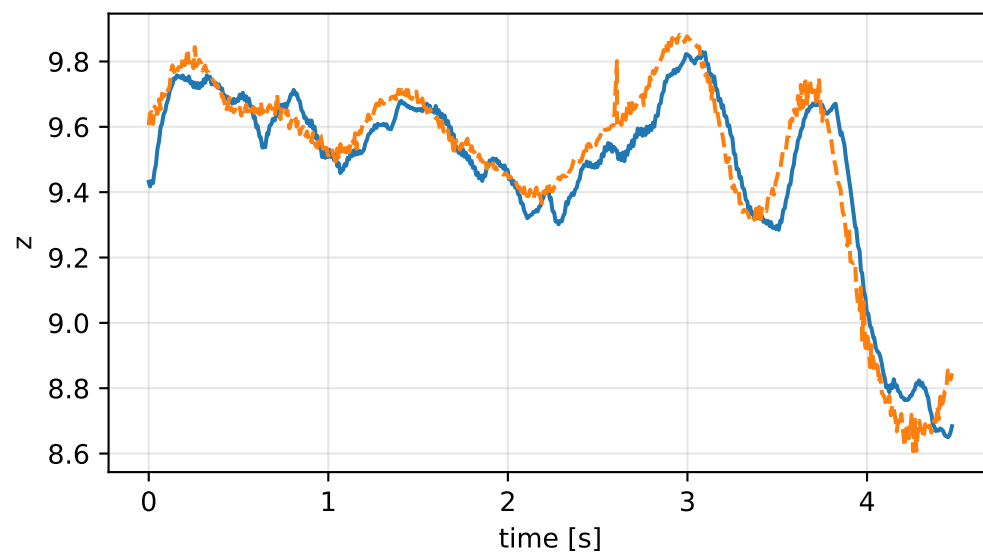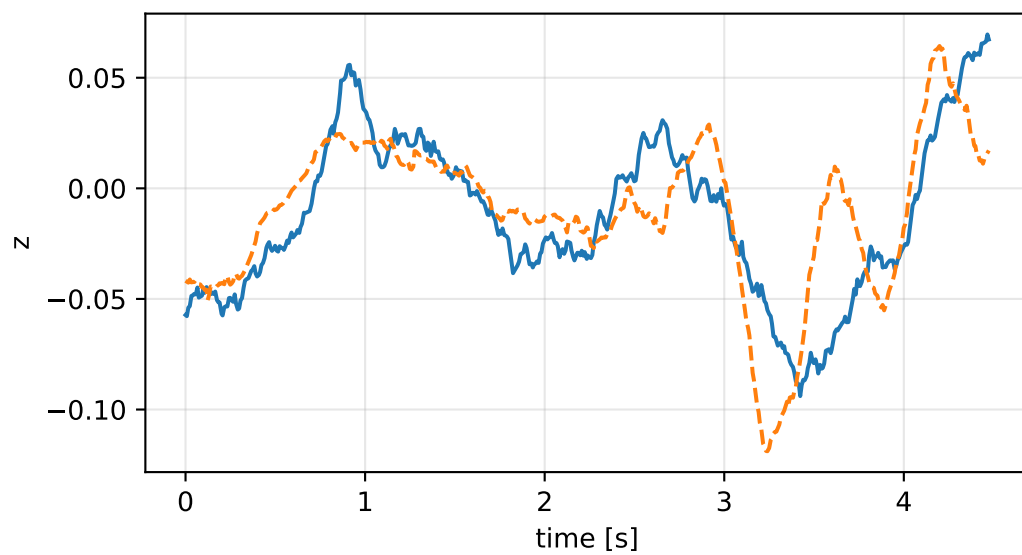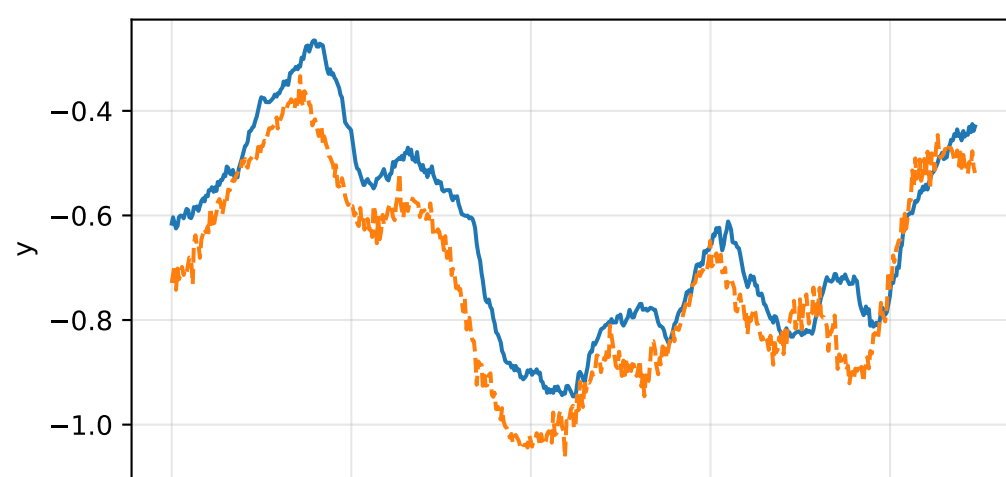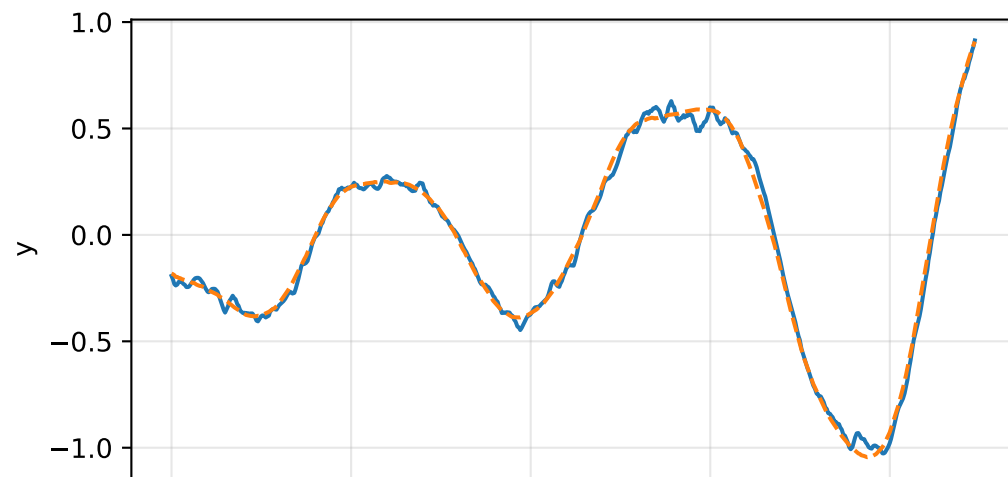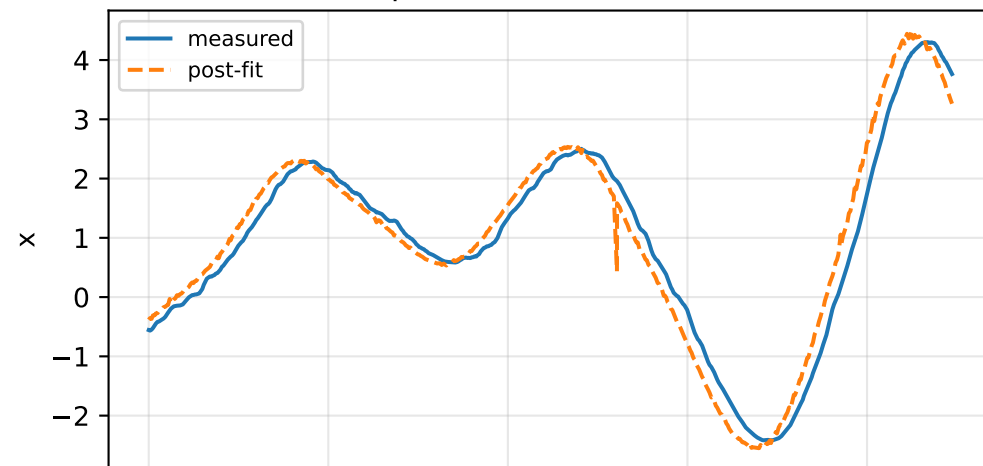

cov_full_no_R_uncertainty_in_s: smooth-to-strict continuation

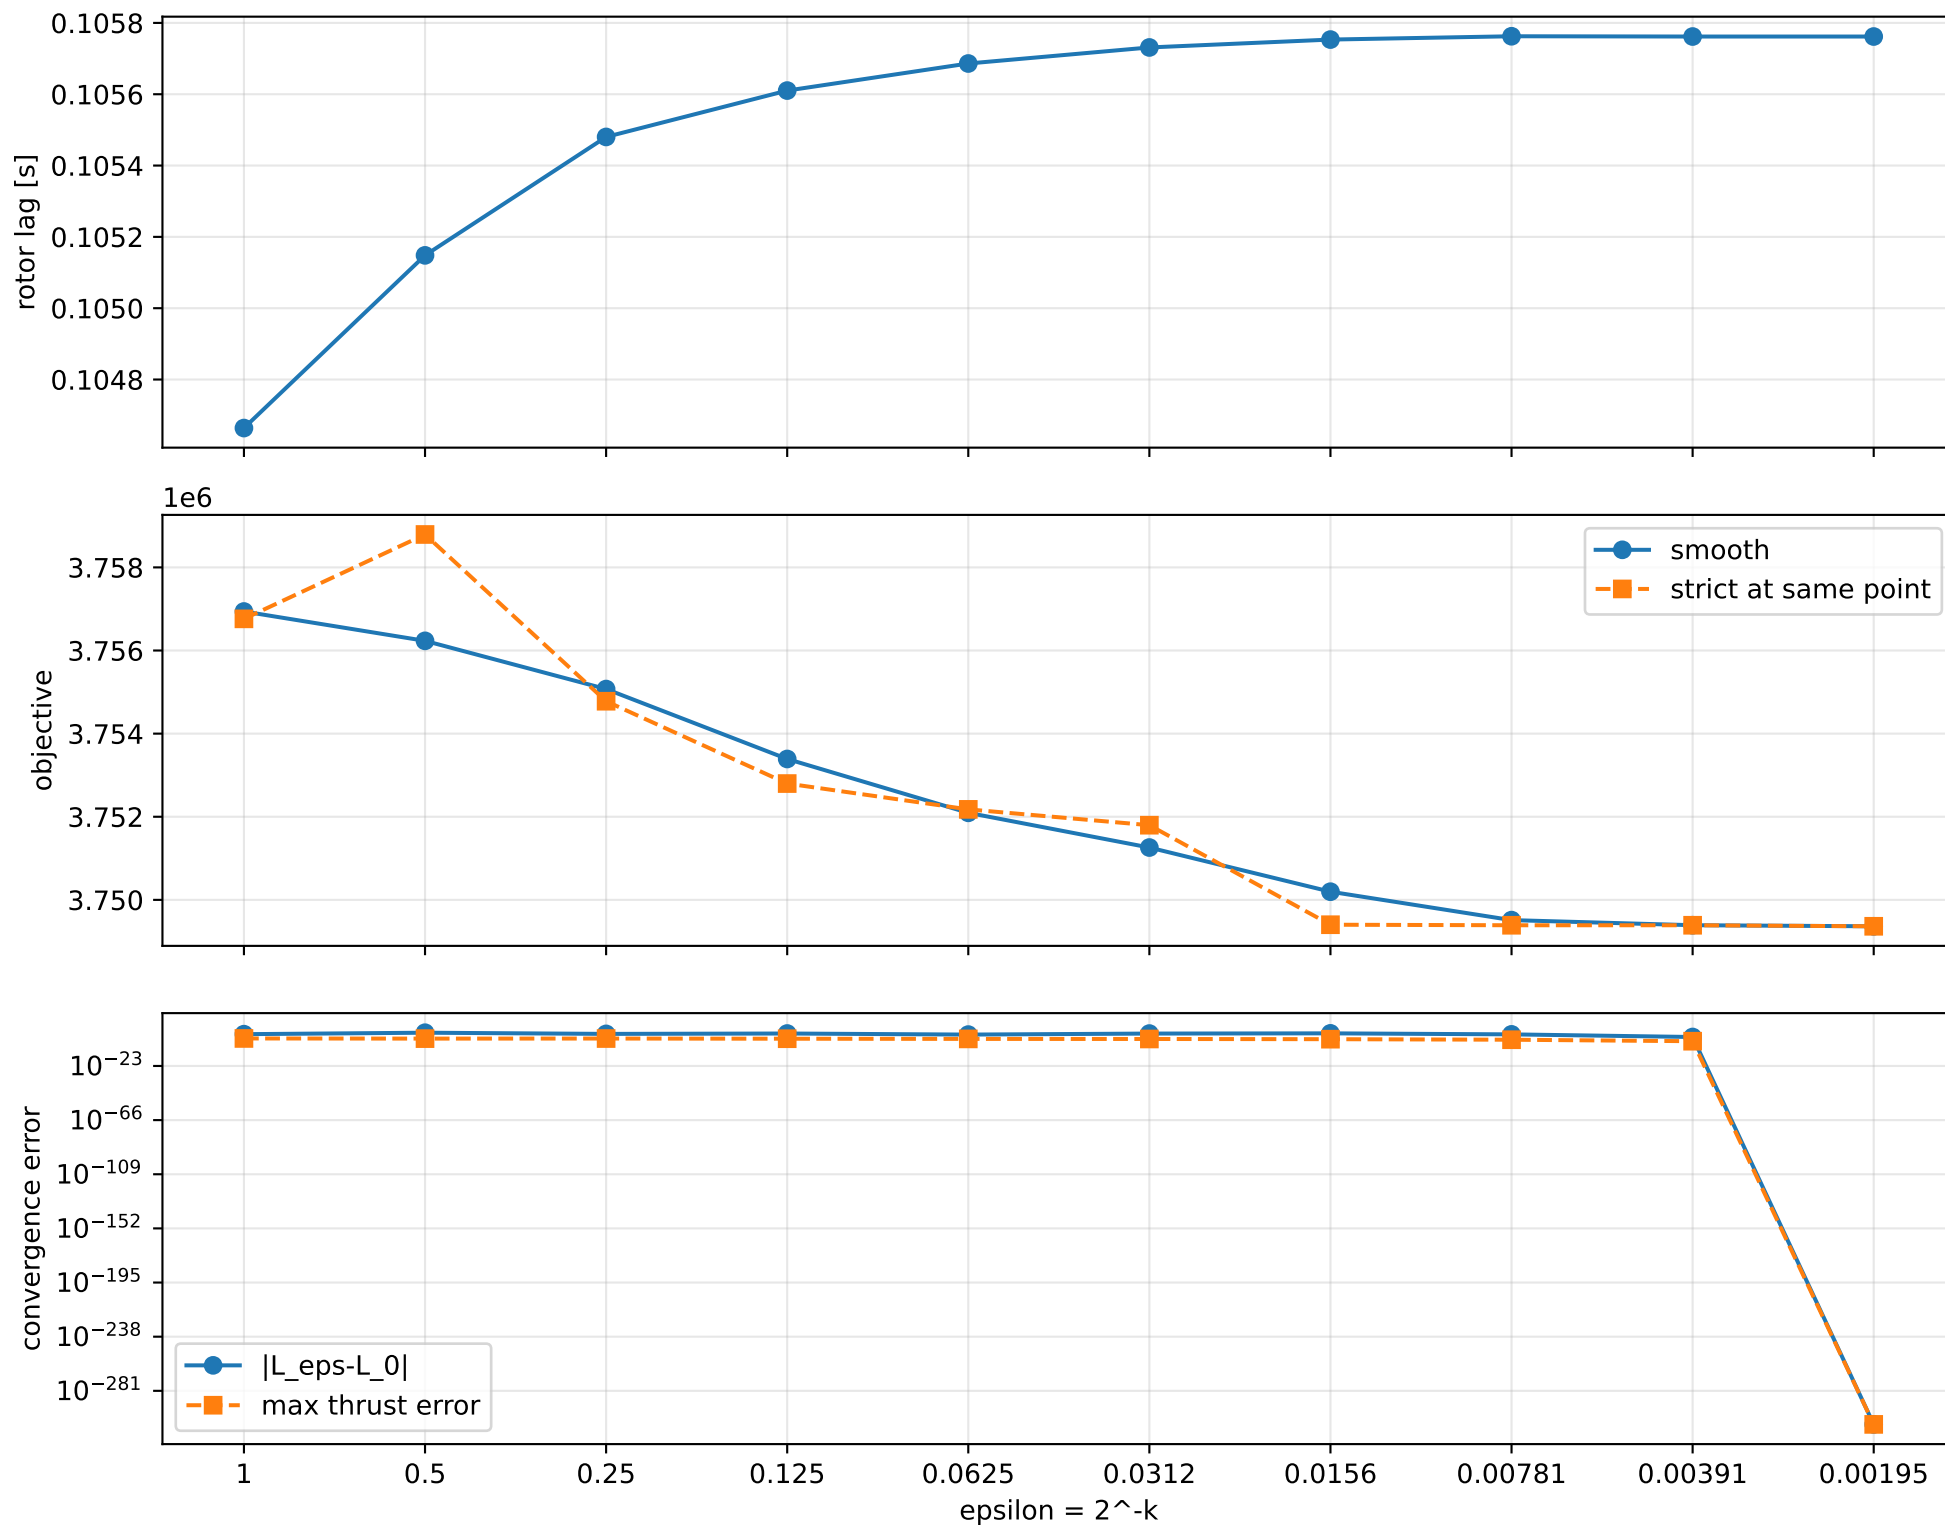

cov_full_no_R_uncertainty_in_s: exact strict-ZOH lag cells

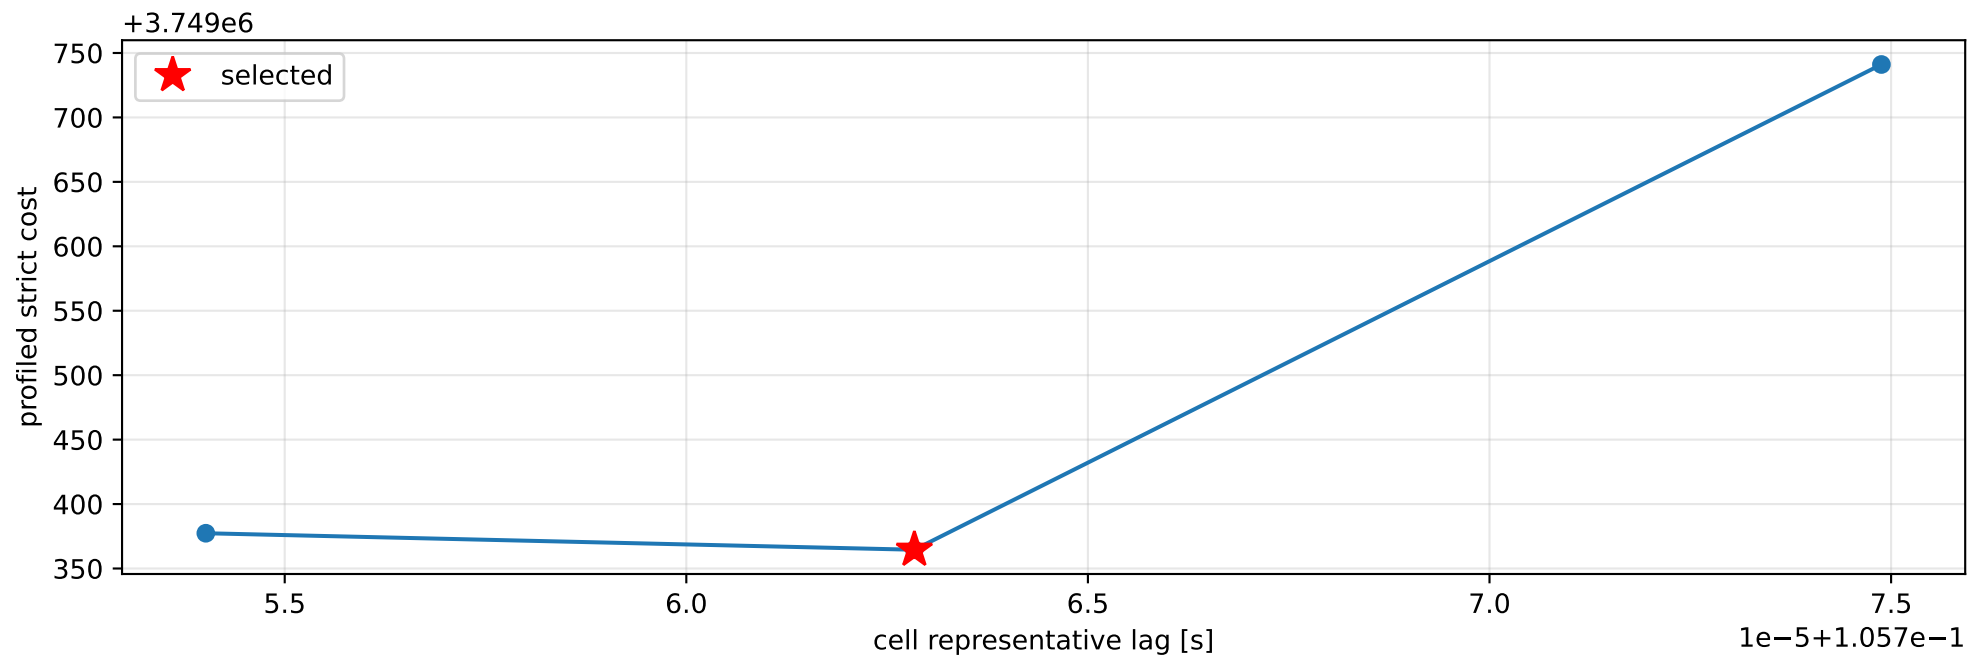

selected (0.105755091, 0.105770588] s; final smooth 0.105761816 s; data boundary=False

cov_full_no_R_uncertainty_in_s: parameter estimate

Case: cov_full_no_R_uncertainty_in_s
status: completed (all stages completed)

mass [kg]: nominal 2.35159759; estimated 4.35196888

inertia [kg m²]:

[[0.77399012 0.32281387 0.19496226]
 [0.32281387 2.08014961 0.02156927]
 [0.19496226 0.02156927 2.80943497]]

CoG body [m]: [0.00197226 0.17764691 -0.19800145]

force effectiveness: [0.29972934 0.37248402 2.92524378 2.74096272]

scale-free J/m [m²]:





[[0.17784827 0.07417651 0.04479863]
 [0.07417651 0.47797897 0.00495621]
 [0.04479863 0.00495621 0.64555493]]

scale-free f/m: [0.06887212 0.08558977 0.6721656 0.6298213]


rotor lag cell: (0.105755091, 0.105770588] s

representative: 0.105762839 s

cov_full_no_R_uncertainty_in_s: ridge spectrum (rank 13, nullity 1, ||jv||=3.09e-11)

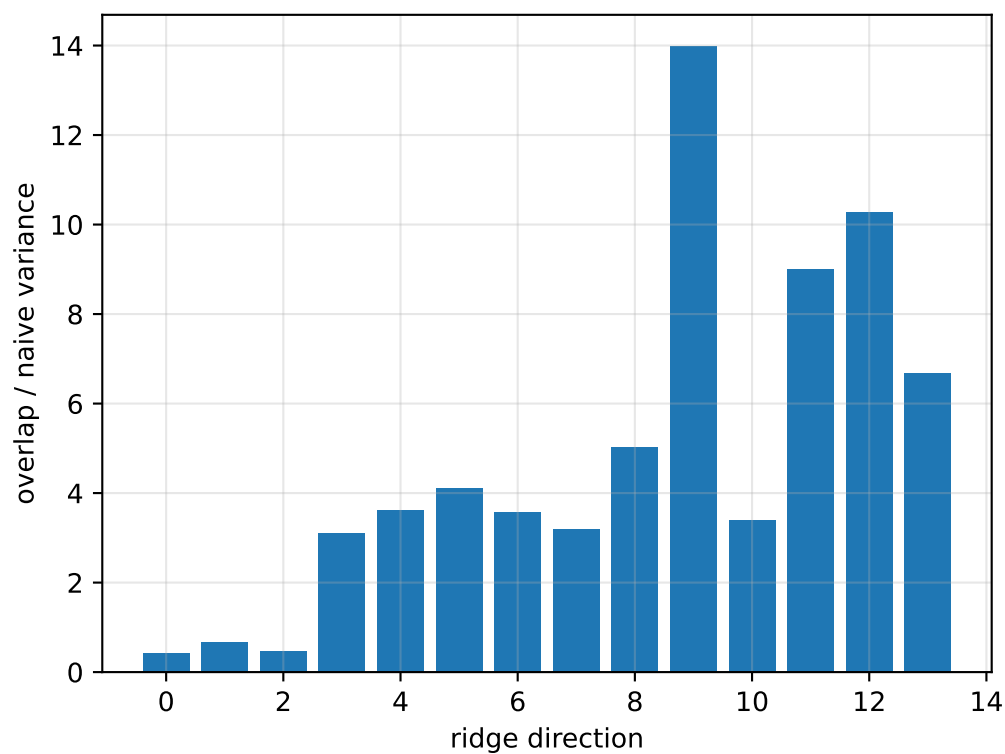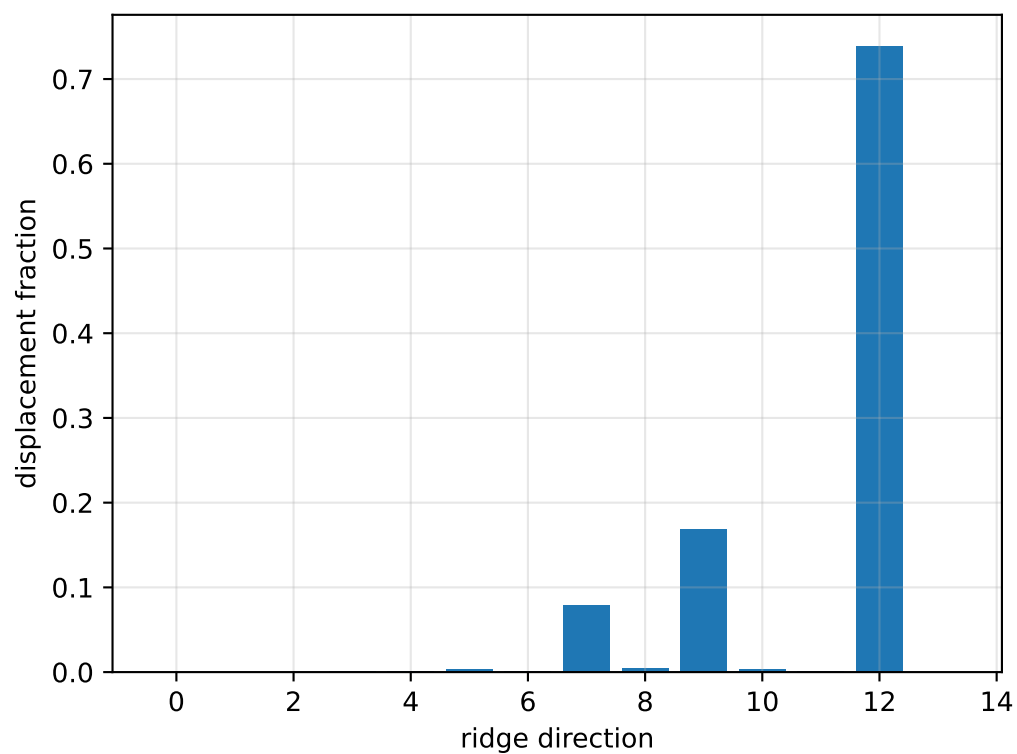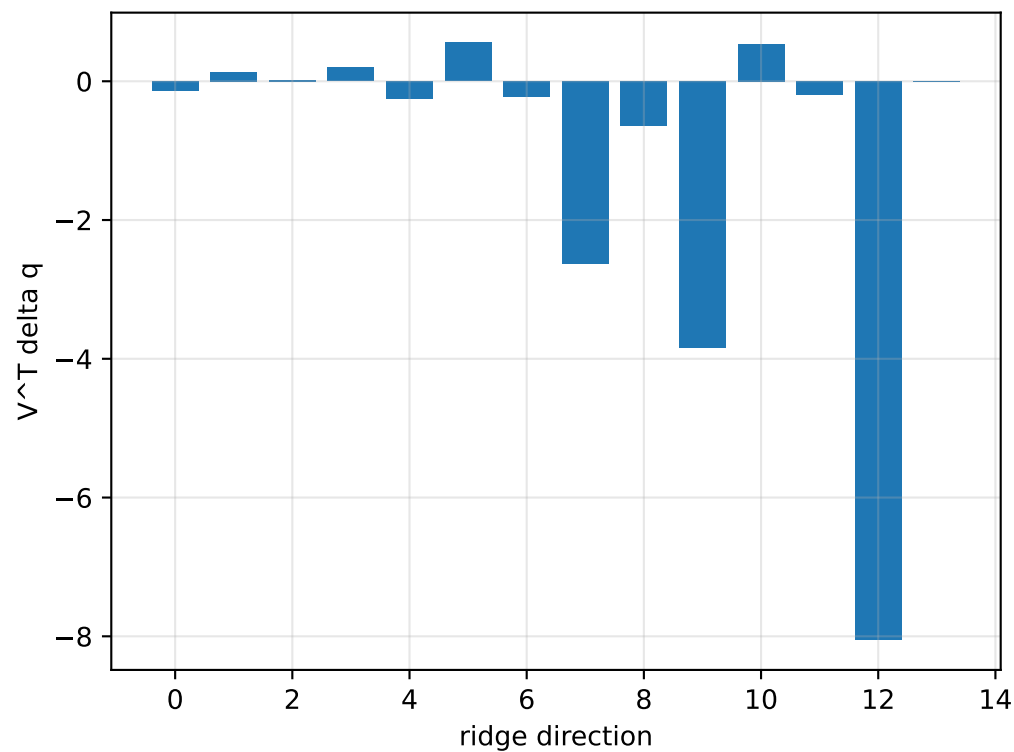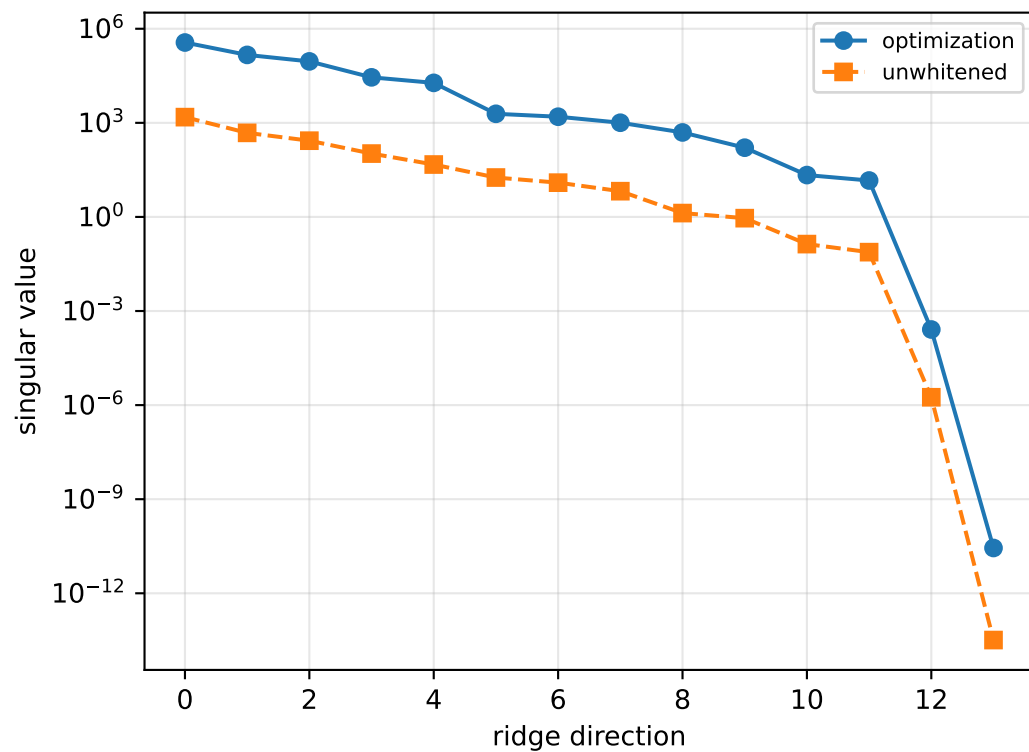

cov_full_no_R_uncertainty_in_s: optimization vs reference covariance

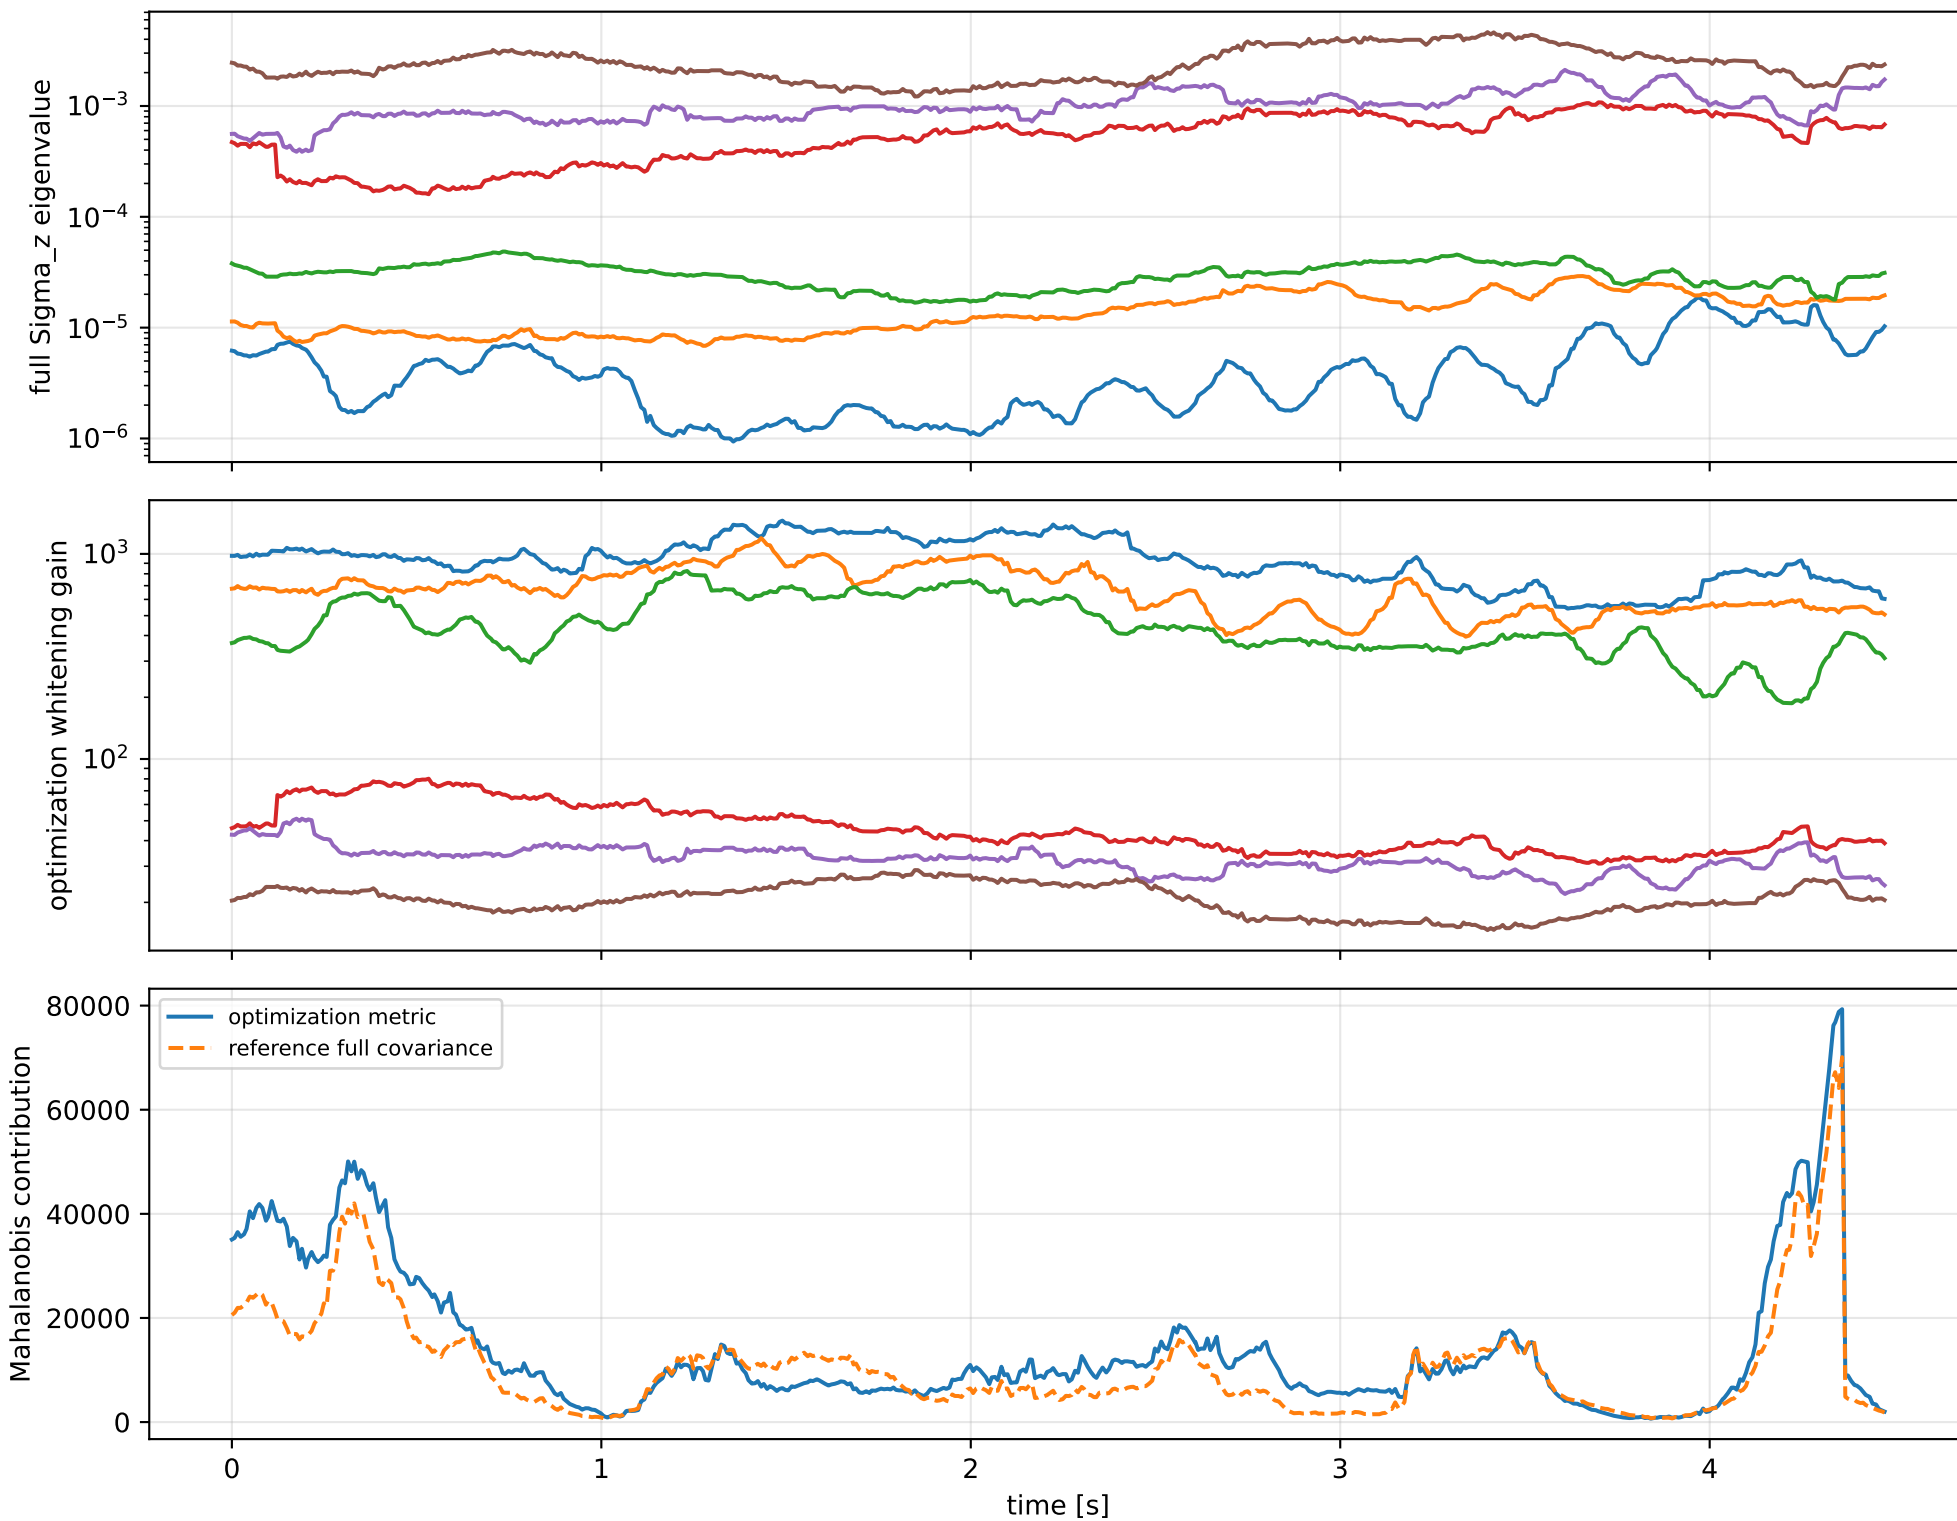

cov_full_no_R_uncertainty_in_s: wrench / closure (force max 1.24e-14, torque max 2.66e-15)

