
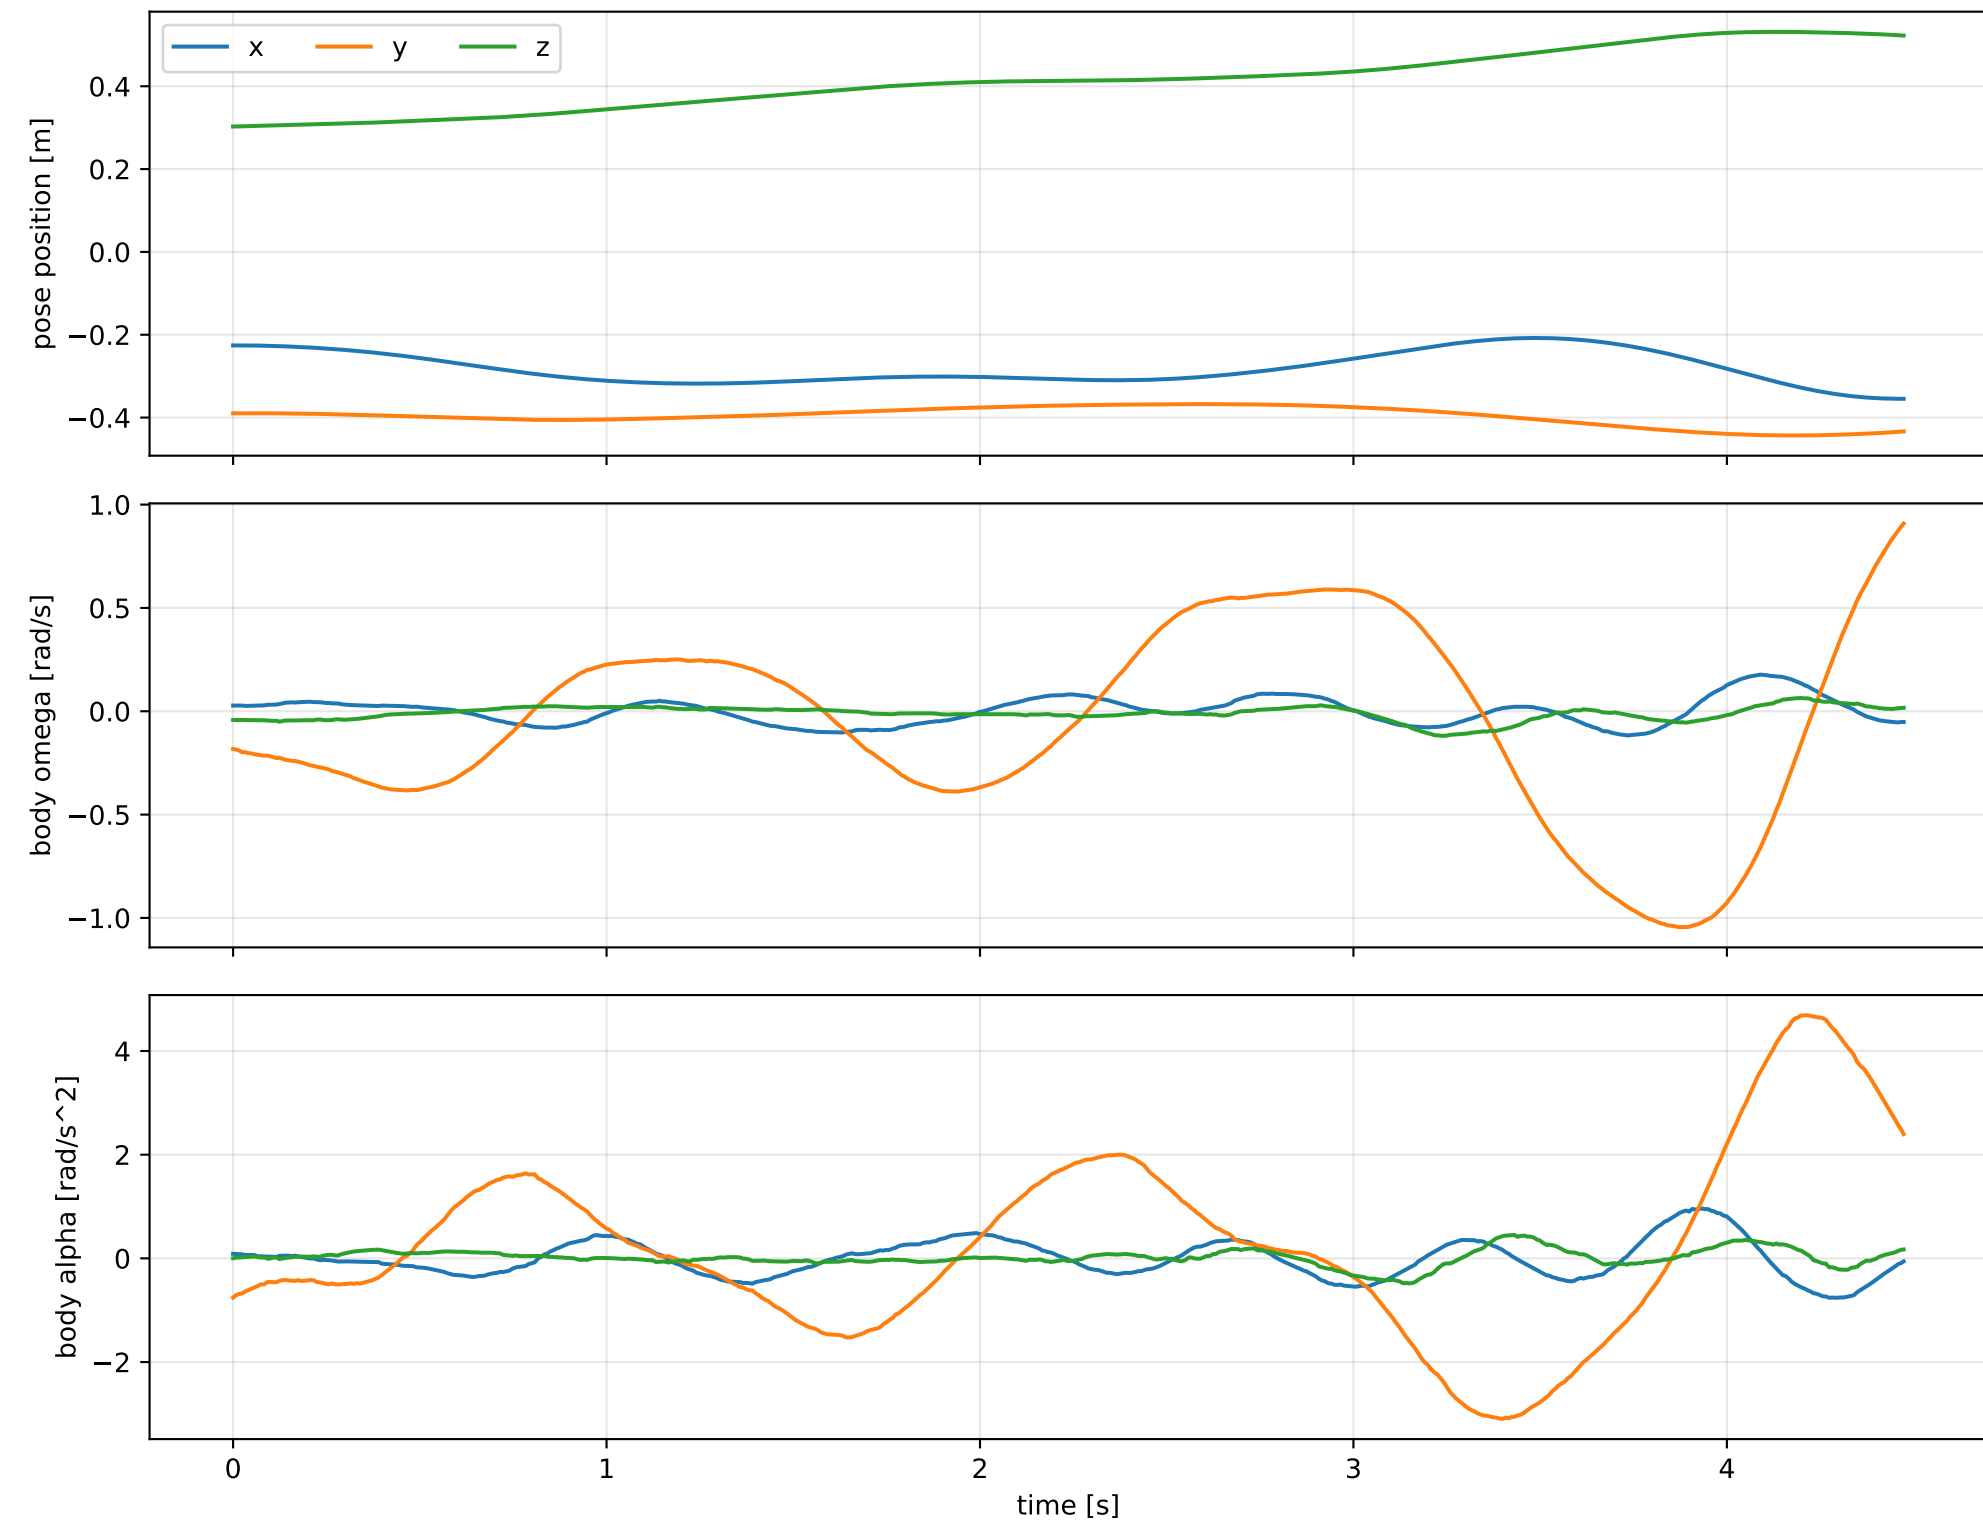
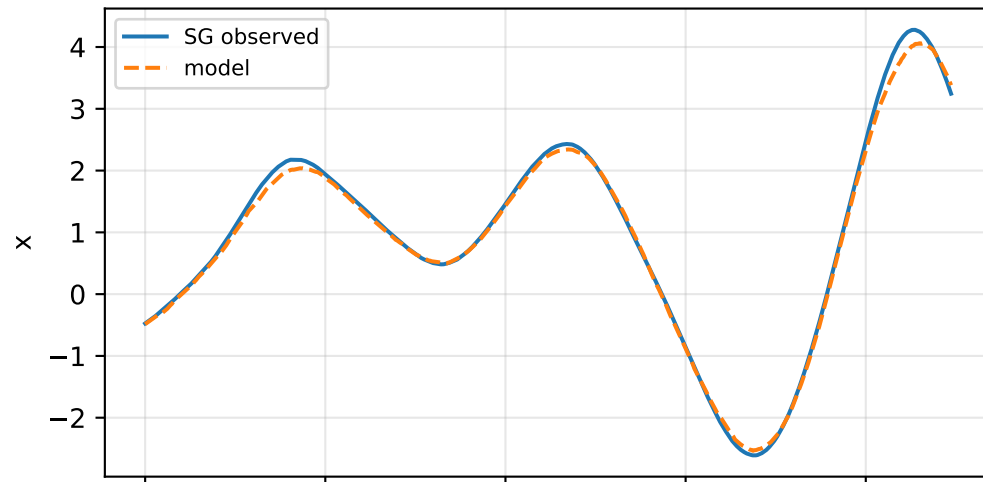
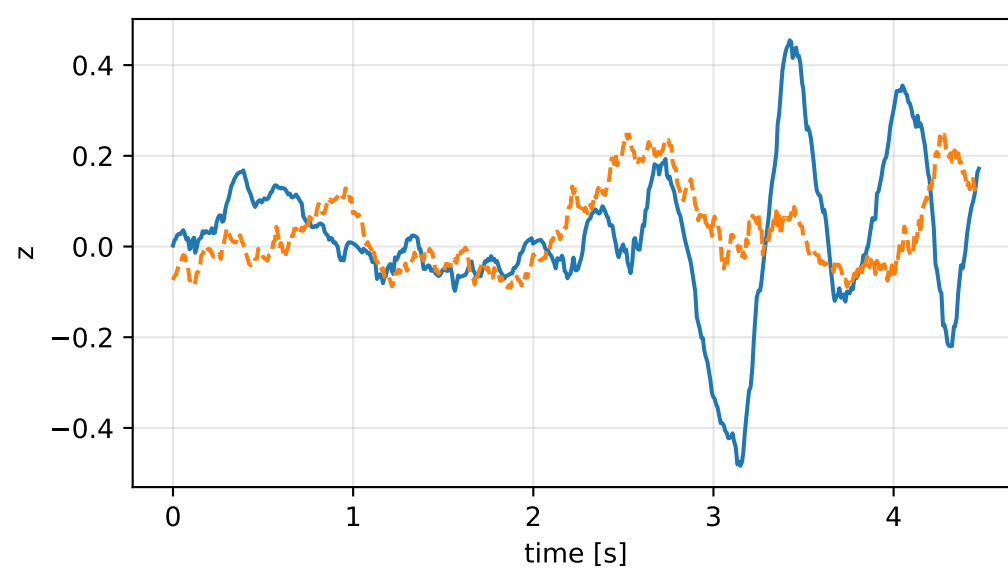
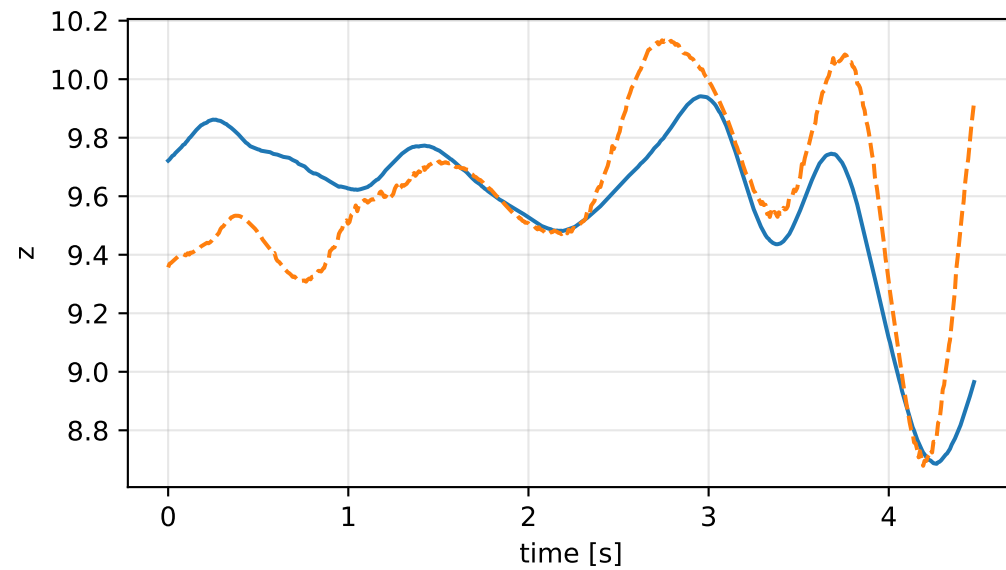
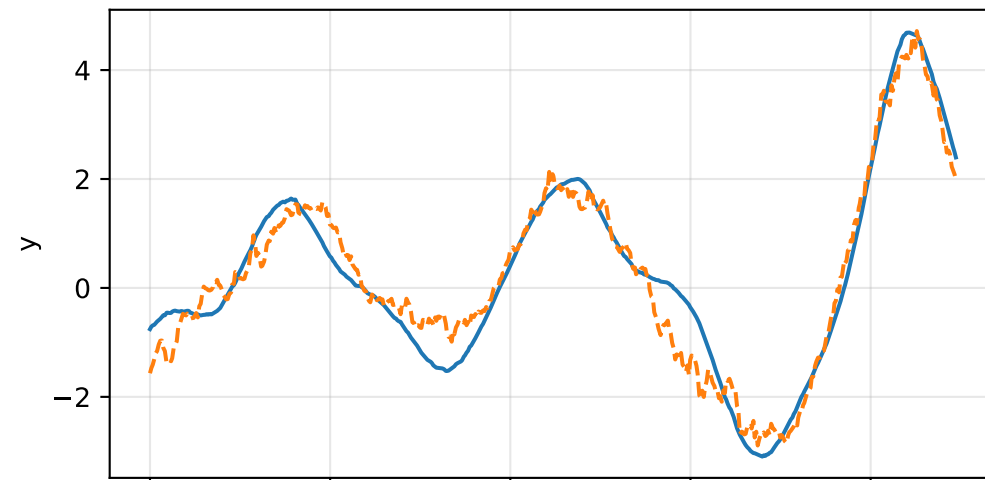
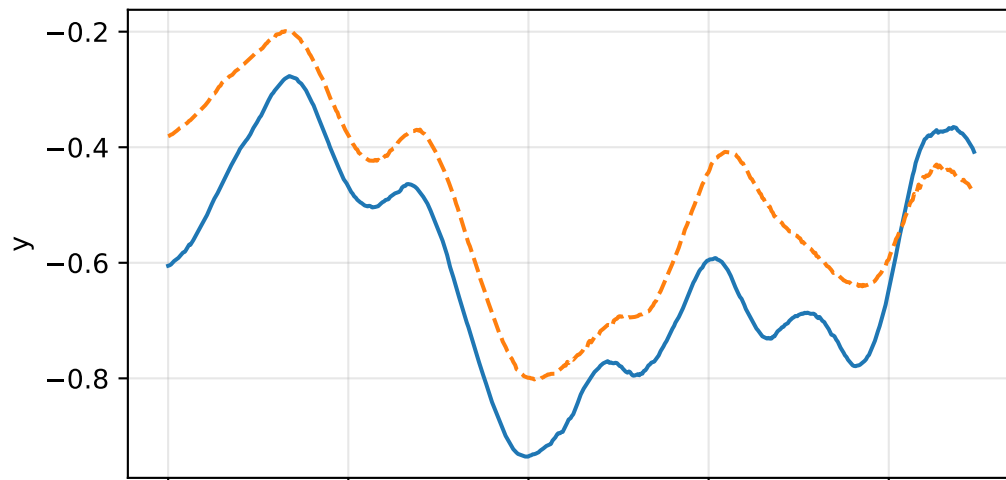


lag_pow2_depth_6: SG trajectory and derived motion

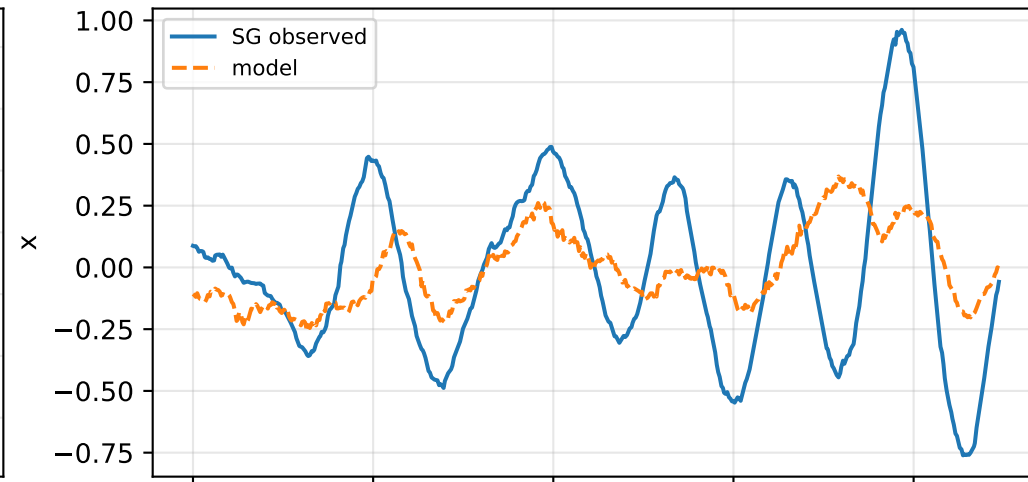


lag_pow2_depth_6: acceleration residual objective


specific acceleration [m/s²]angular acceleration [rad/s²]

lag_pow2_depth_6: gimbal measurement audit (objective=measured_sg)


gimbal 1: RMSE=0.027, max=0.07529 rad

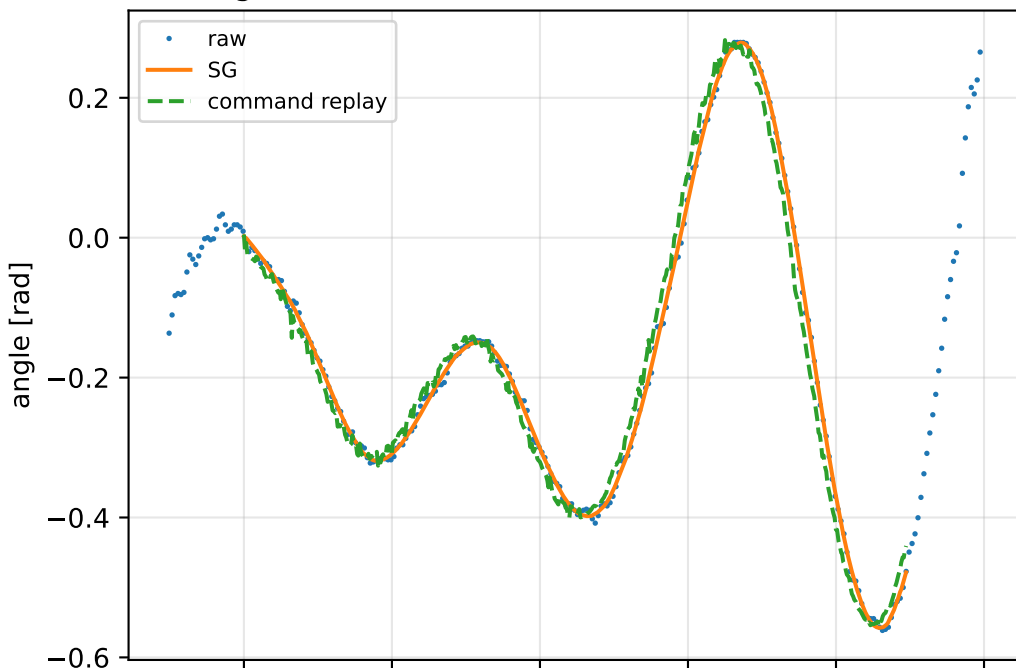


gimbal 2: RMSE=0.03107, max=0.08239 rad

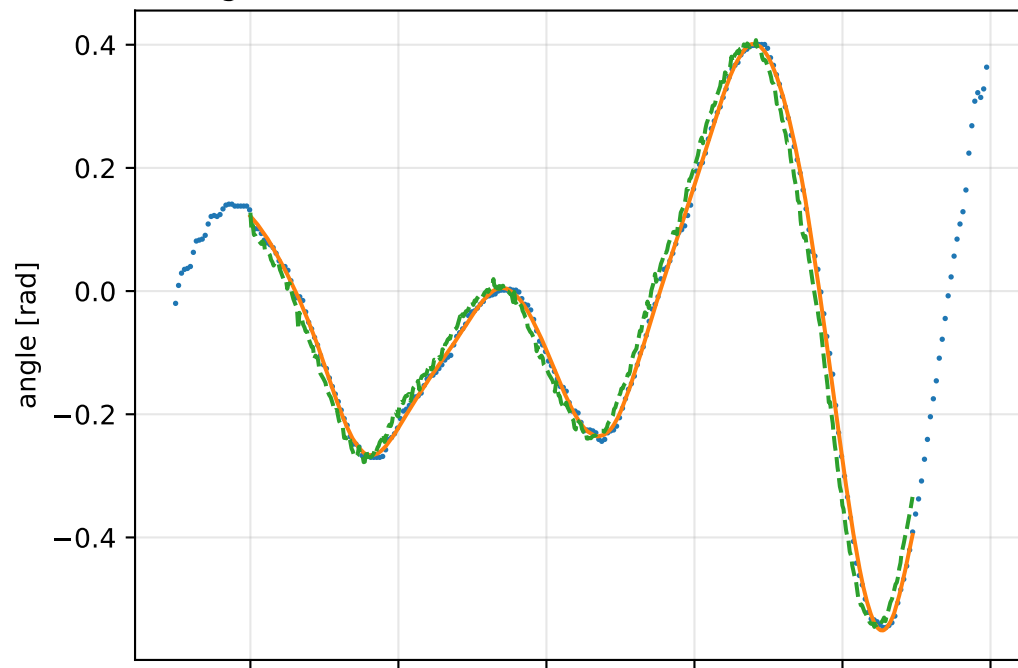

gimbal 3: RMSE=0.03106, max=0.08682 rad






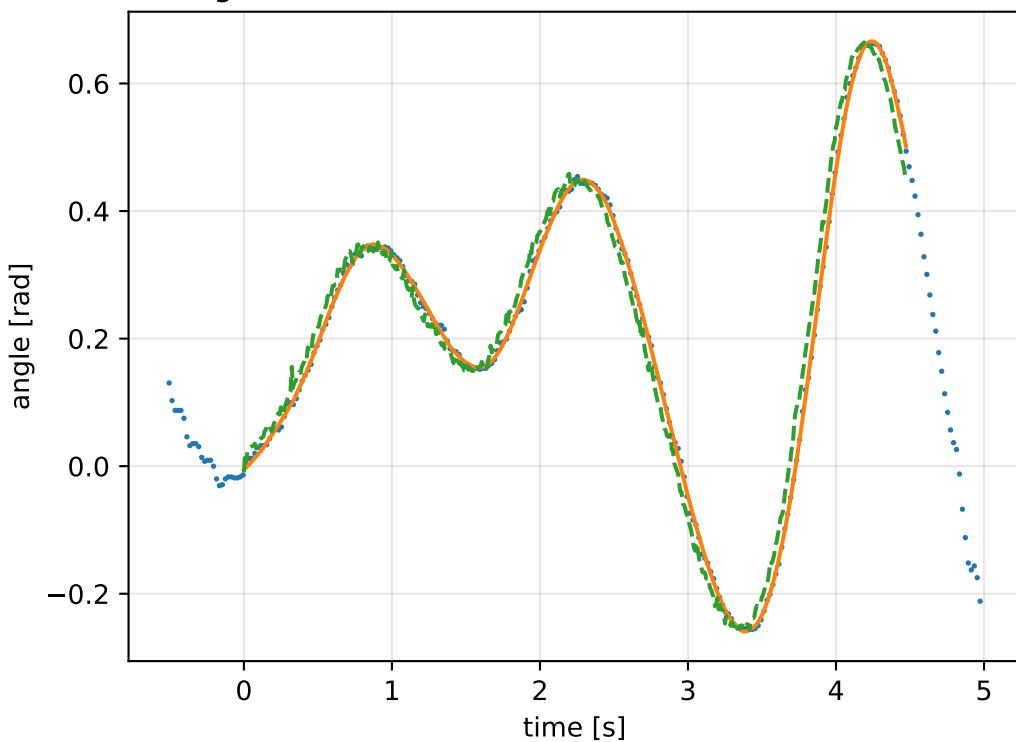


gimbal 4: RMSE=0.02598, max=0.07261 rad

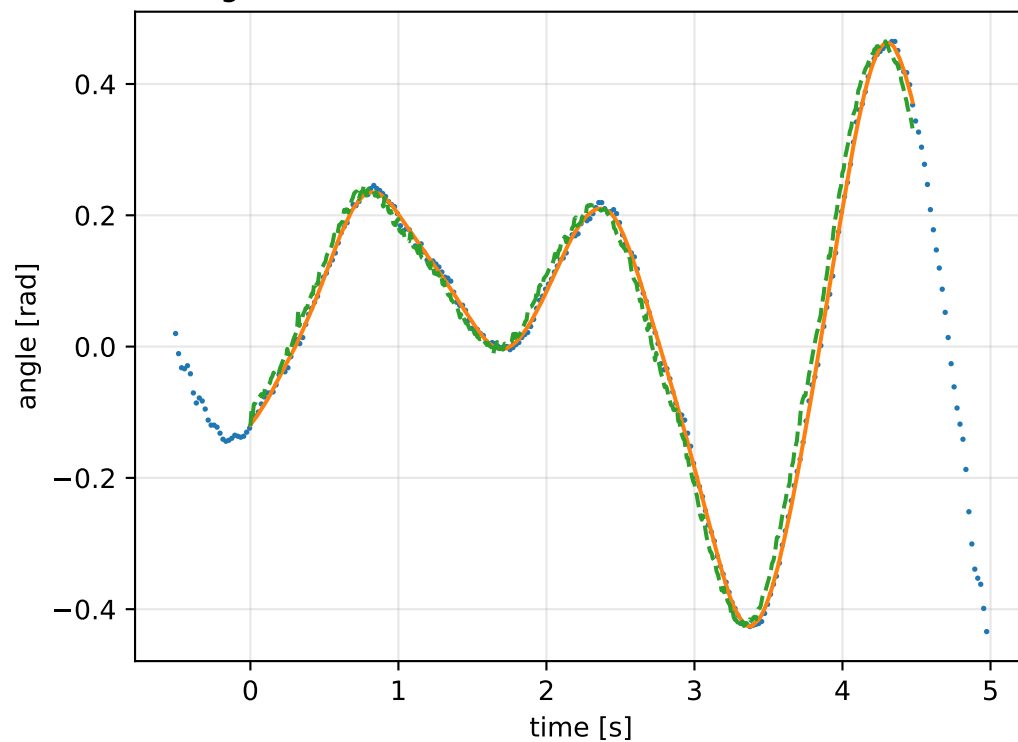


lag_pow2_depth_6: IMU comparison (diagnostic only)



gyro [rad/s]

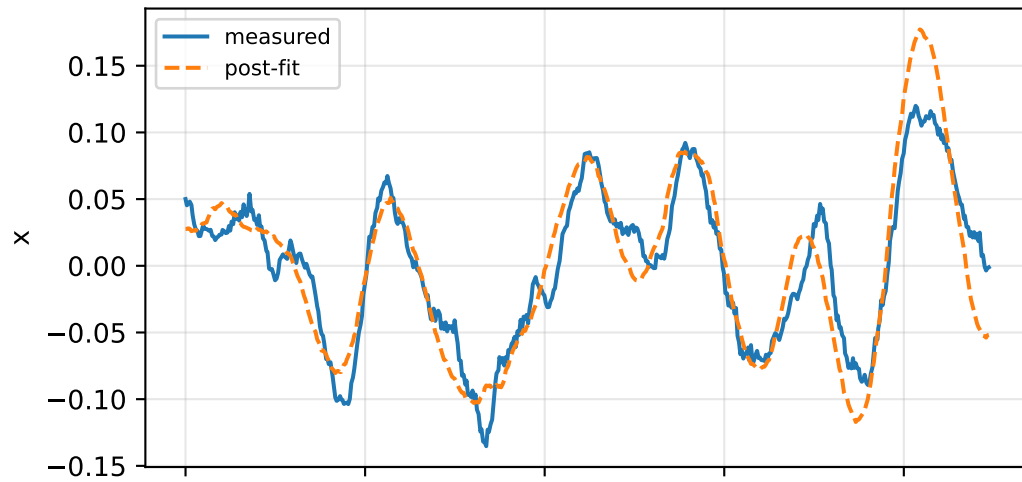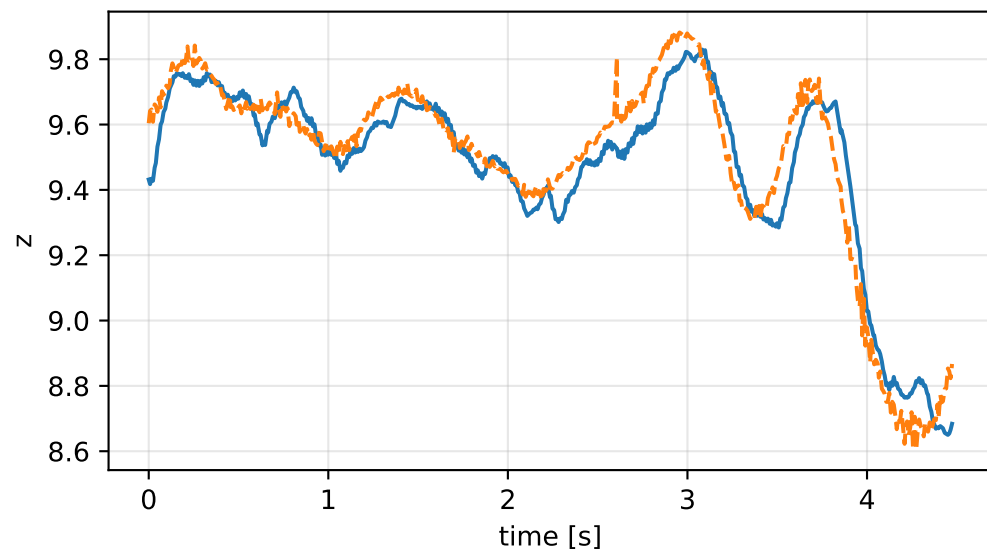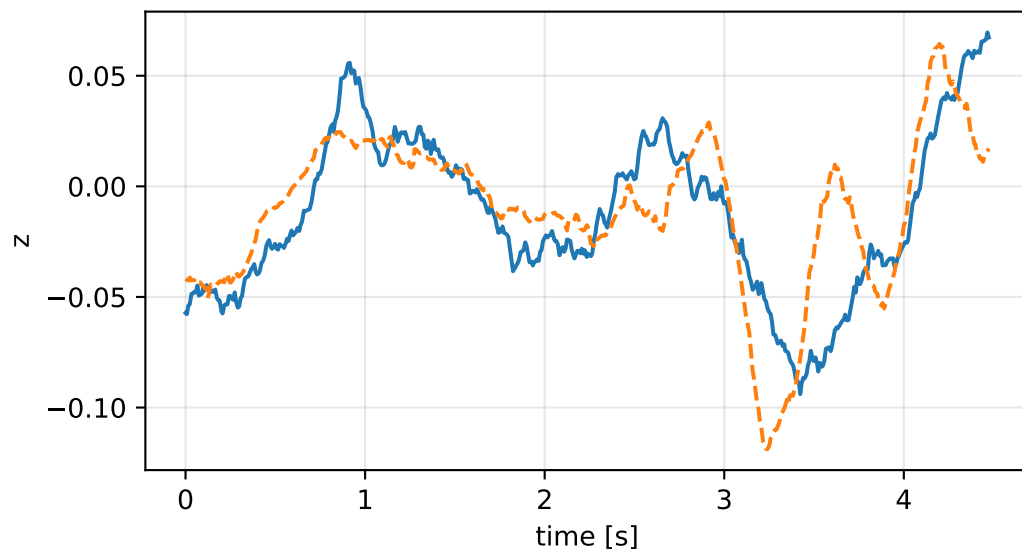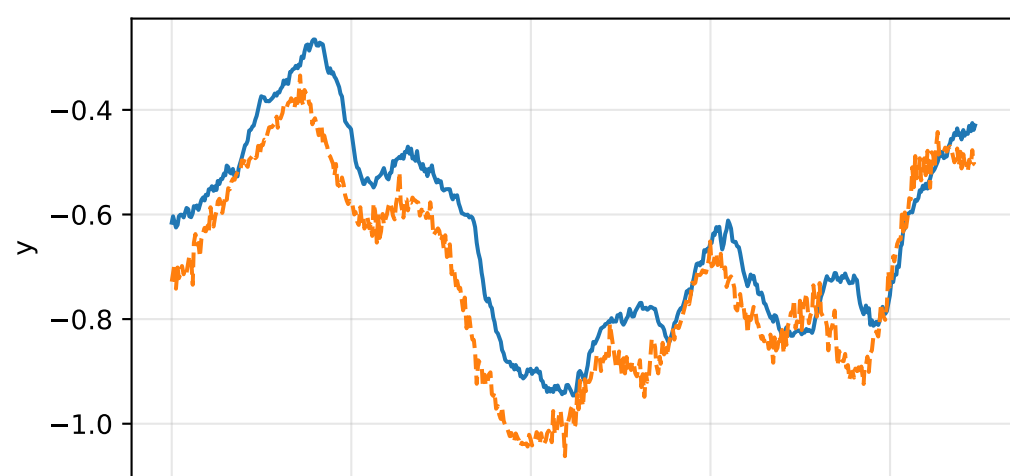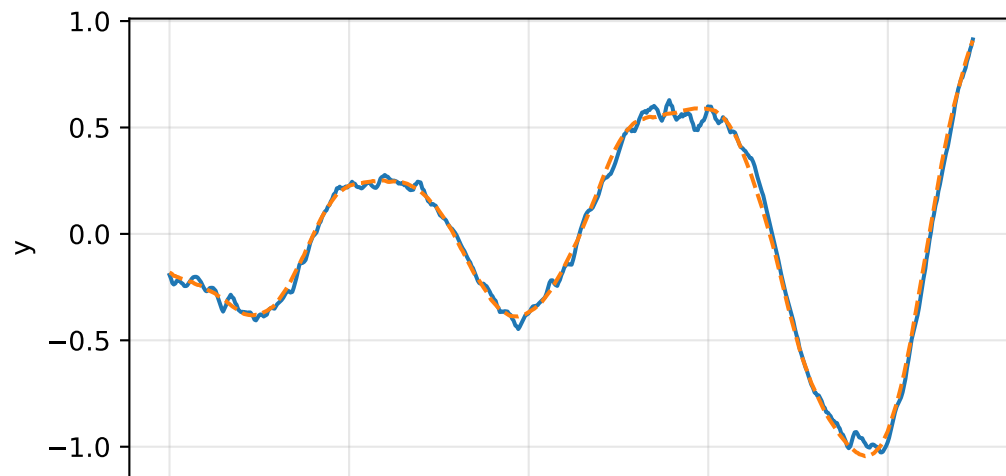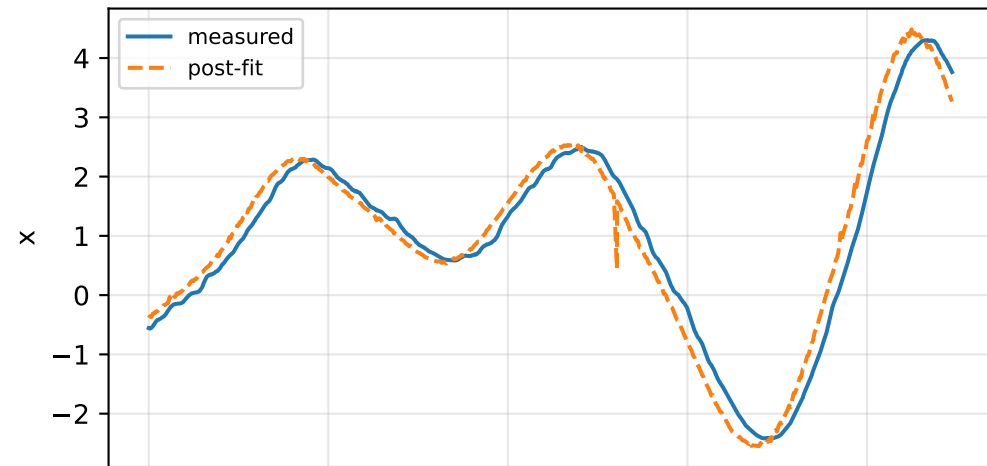specific force [m/s²]

lag_pow2_depth_6: smooth-to-strict continuation

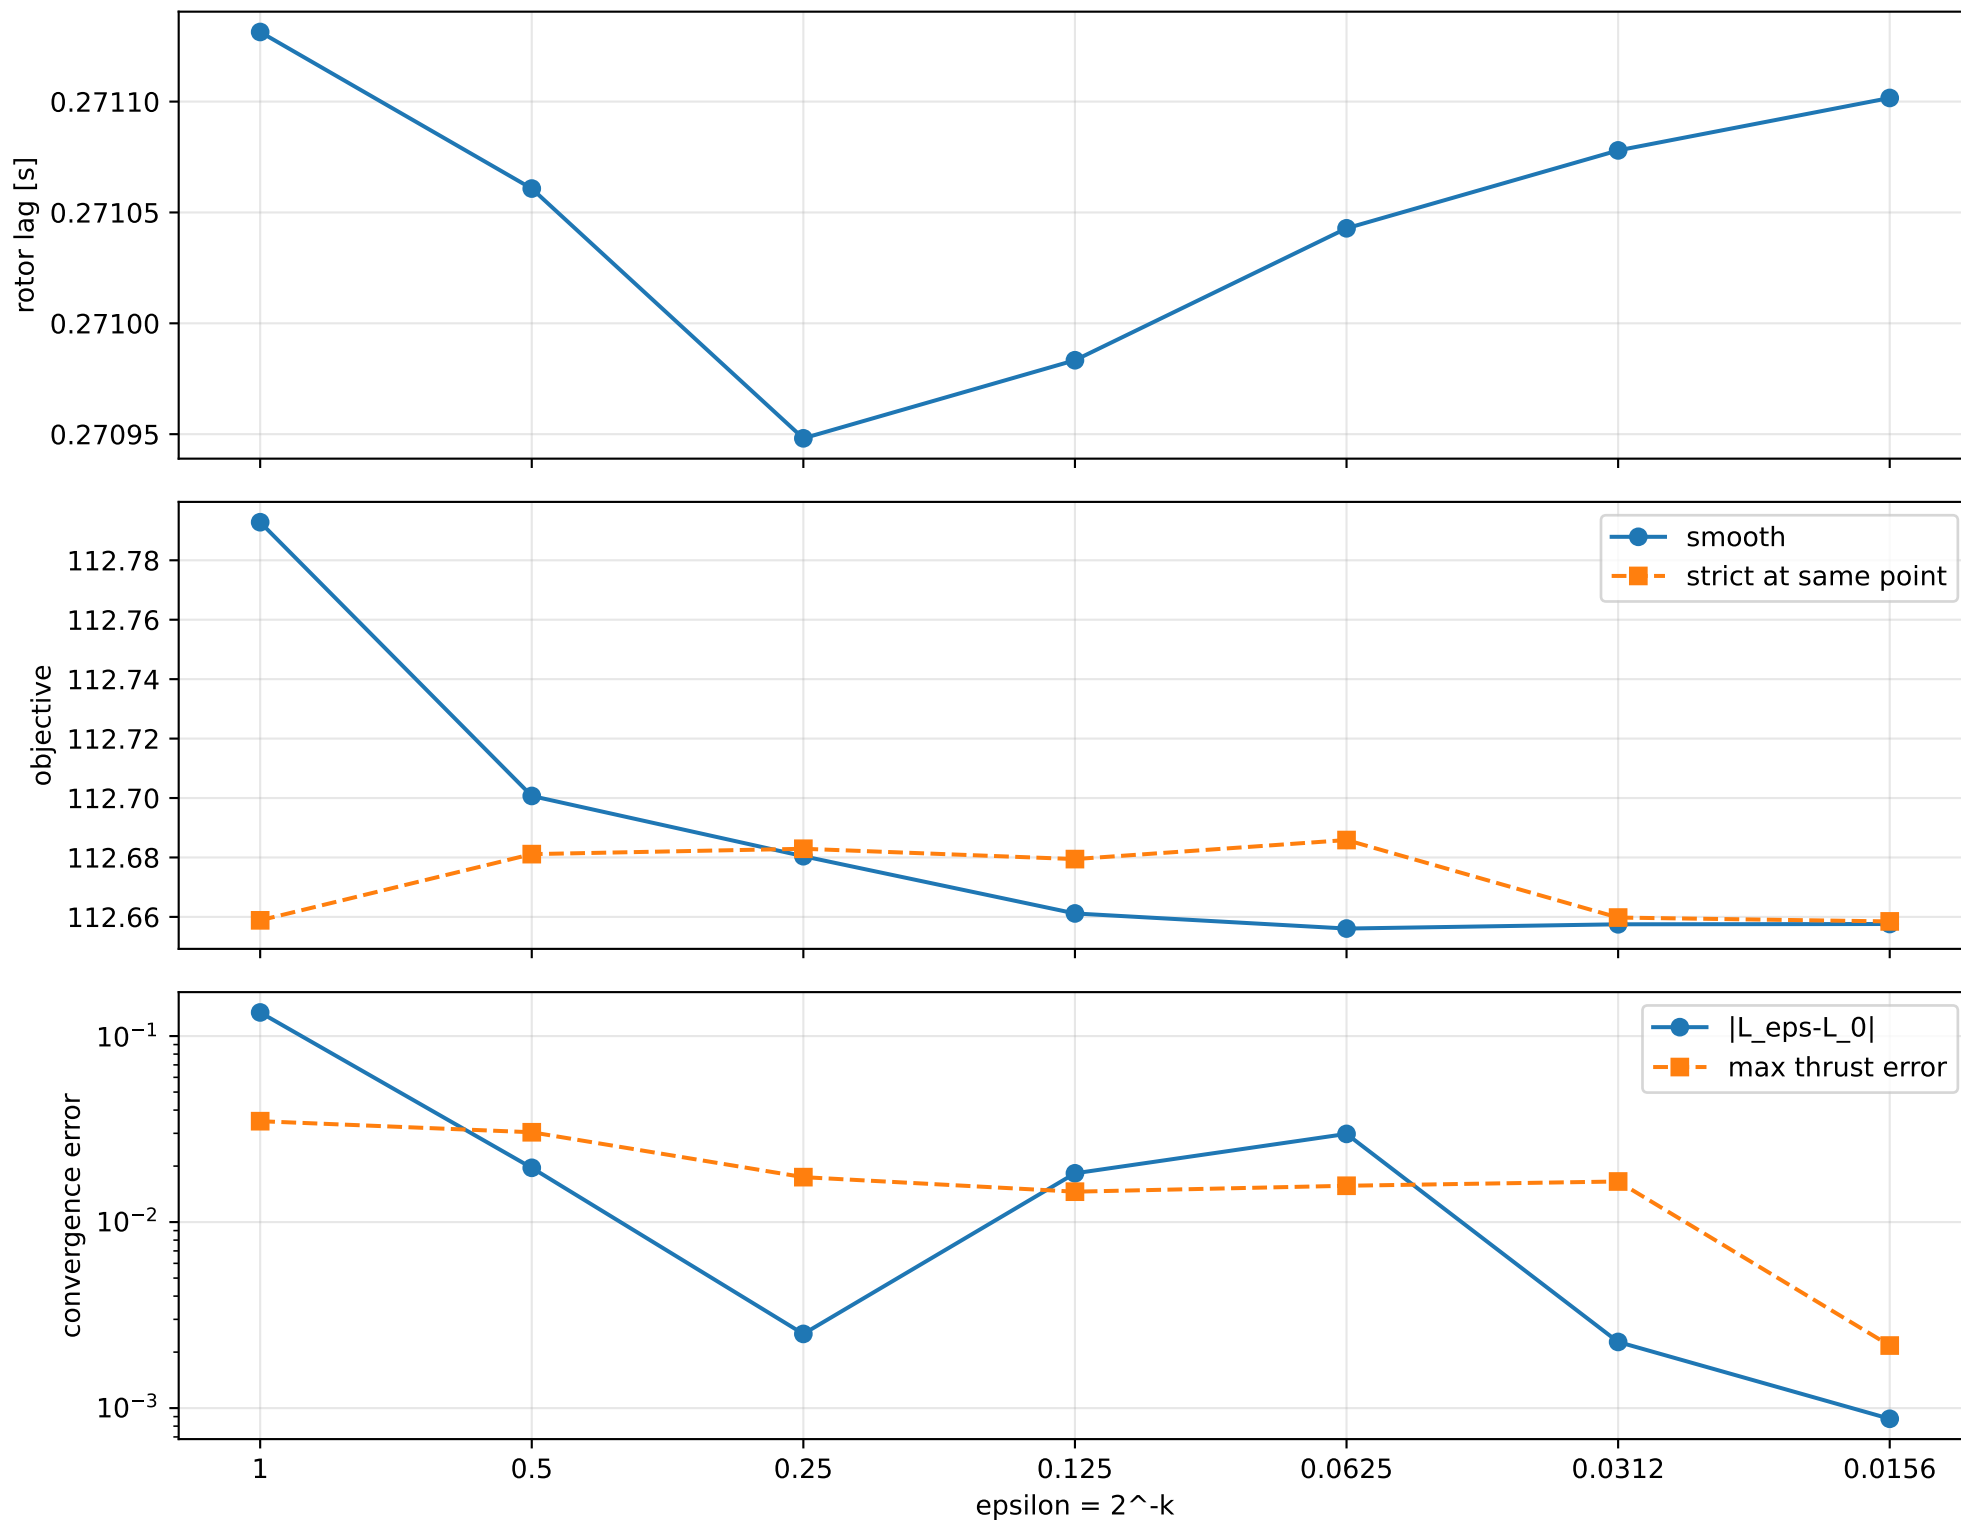

lag_pow2_depth_6: exact strict-ZOH lag cells

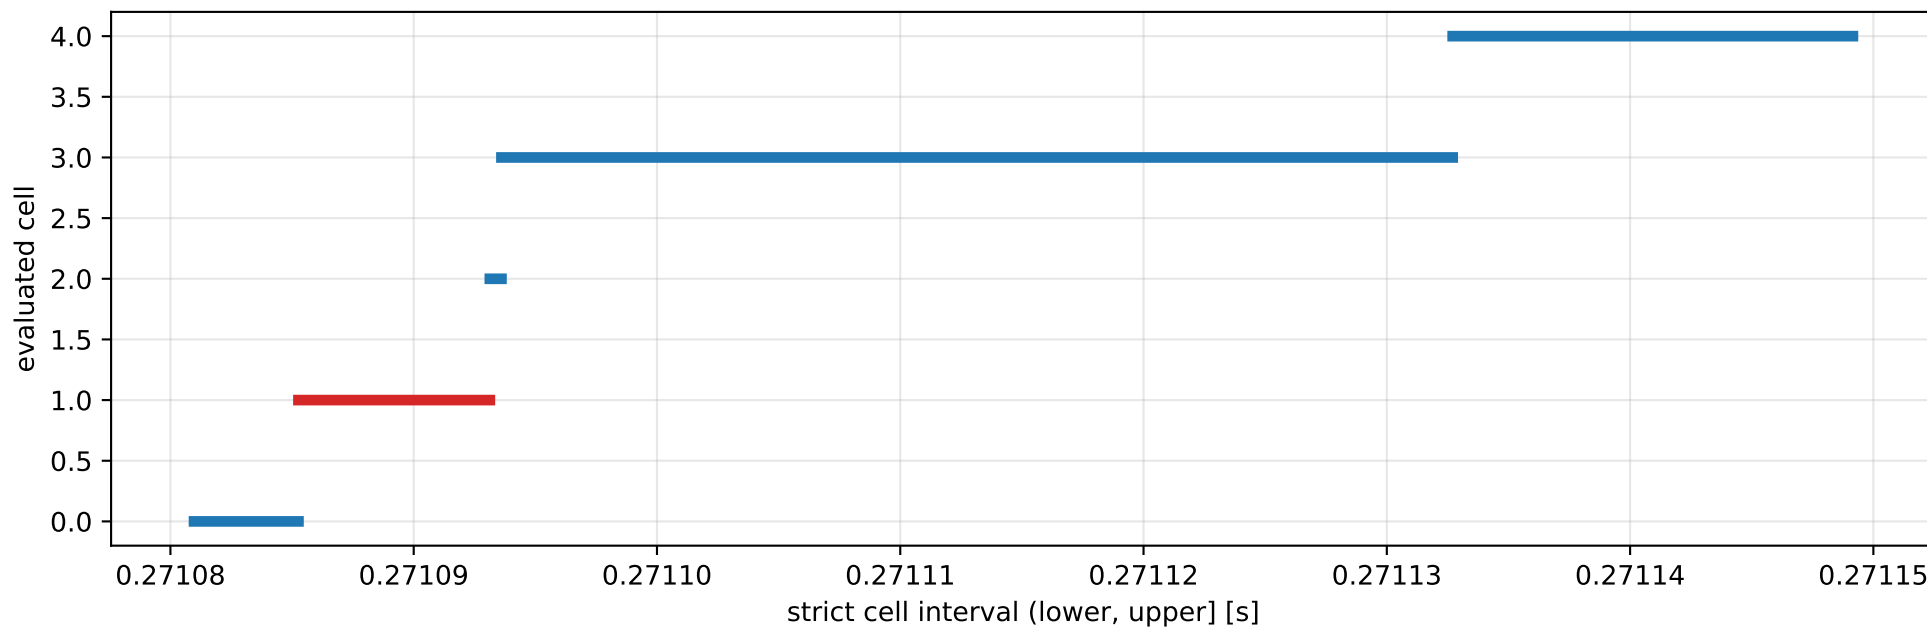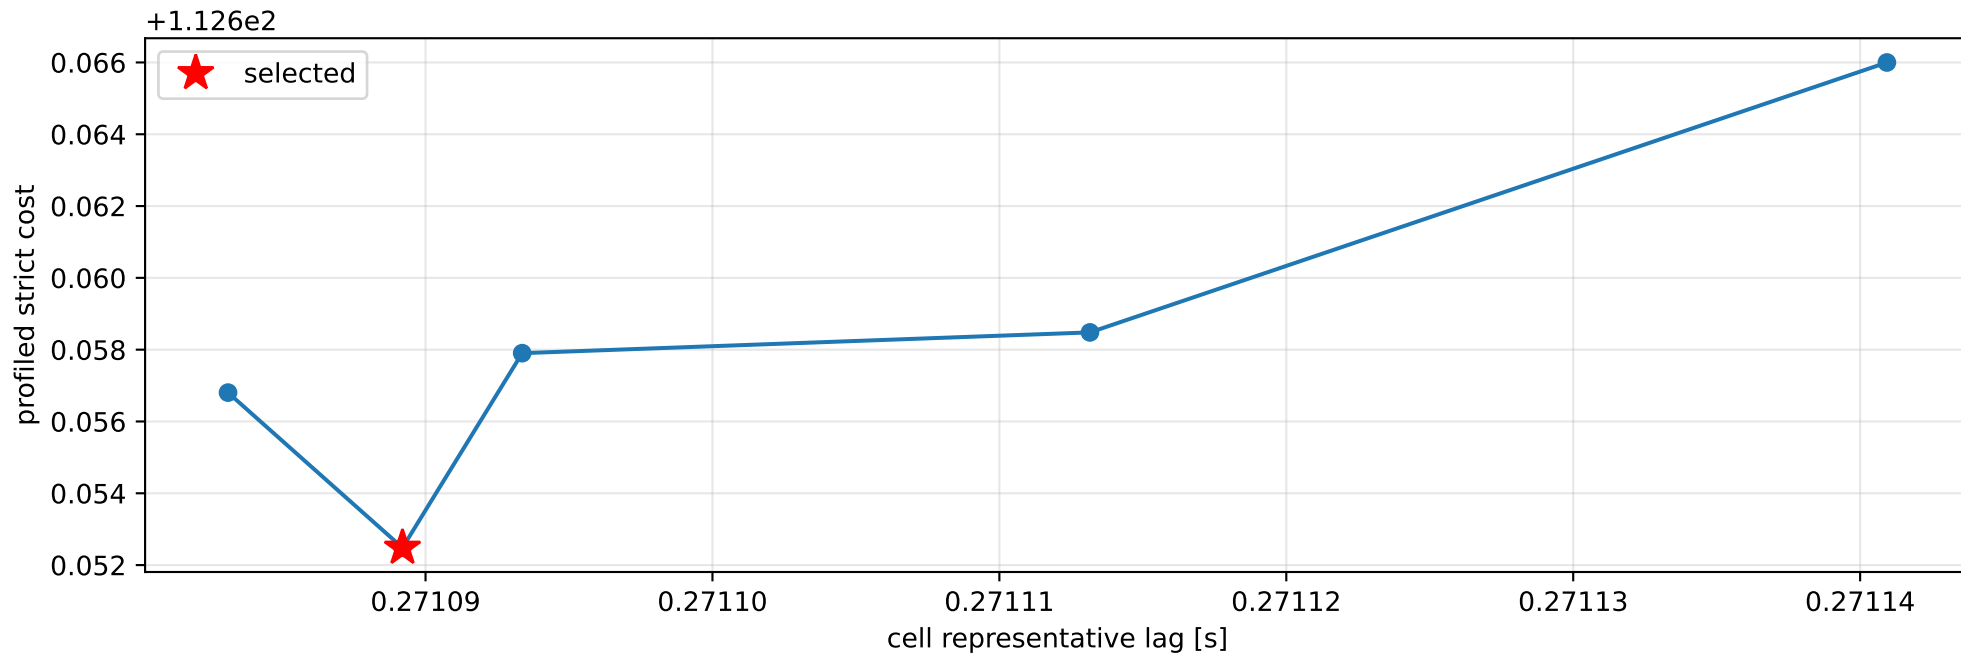

selected (0.271085262, 0.27109313] s; final smooth 0.271101638 s; data boundary=False

lag_pow2_depth_6: parameter estimate

Case: lag_pow2_depth_6

status: completed (all stages completed)

mass [kg]: nominal 2.35159759; estimated 7.52043205

inertia [kg m²]:

[[0.55443709 0.01372501 -0.00323582]

[0.01372501 0.26168335 -0.08172244]

[-0.00323582 -0.08172244 0.79125006]]

CoG body [m]: [-0.026435 0.01133929 0.00941536]

force effectiveness: [2.87131373 2.32387856 2.56341484 3.07927654]

scale-free J/m [m²]:

[[0.0737241 0.00182503 -0.00043027]

[0.00182503 0.03479632 -0.01086672]





[-0.00043027 -0.01086672 0.10521338]]

scale-free f/m: [0.3818017 0.30900865 0.34086005 0.40945474]


rotor lag cell: (0.271085262, 0.27109313] s

representative: 0.271089196 s

lag_pow2_depth_6: ridge spectrum (rank 13, nullity 1, $||v||=1.5e-13$)

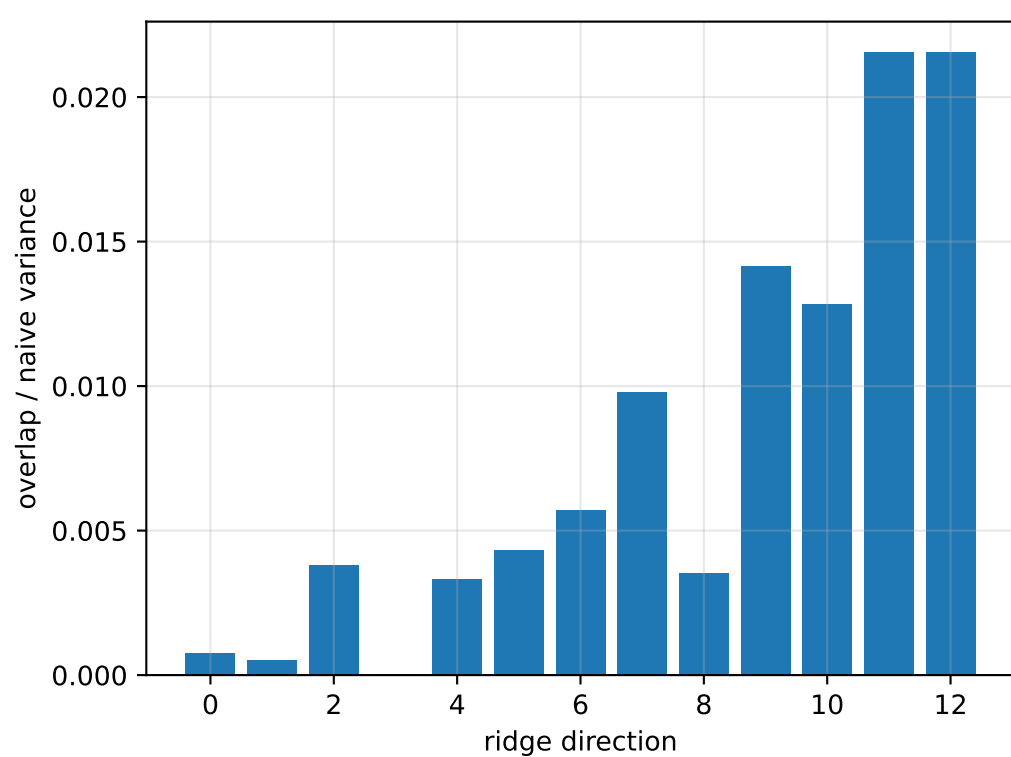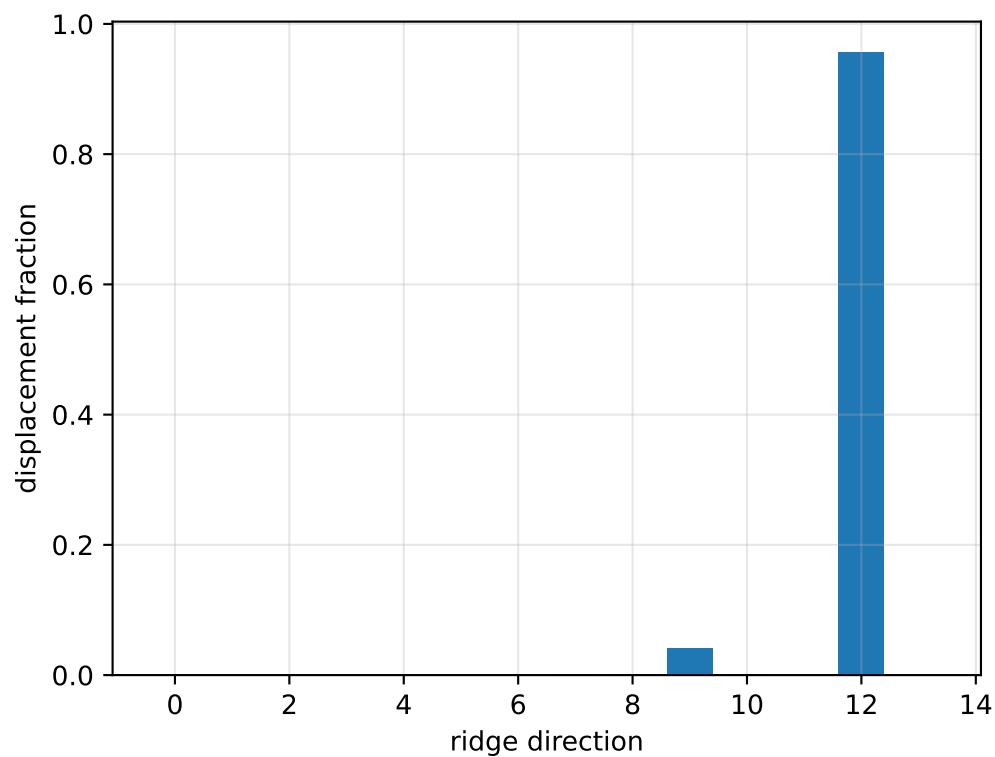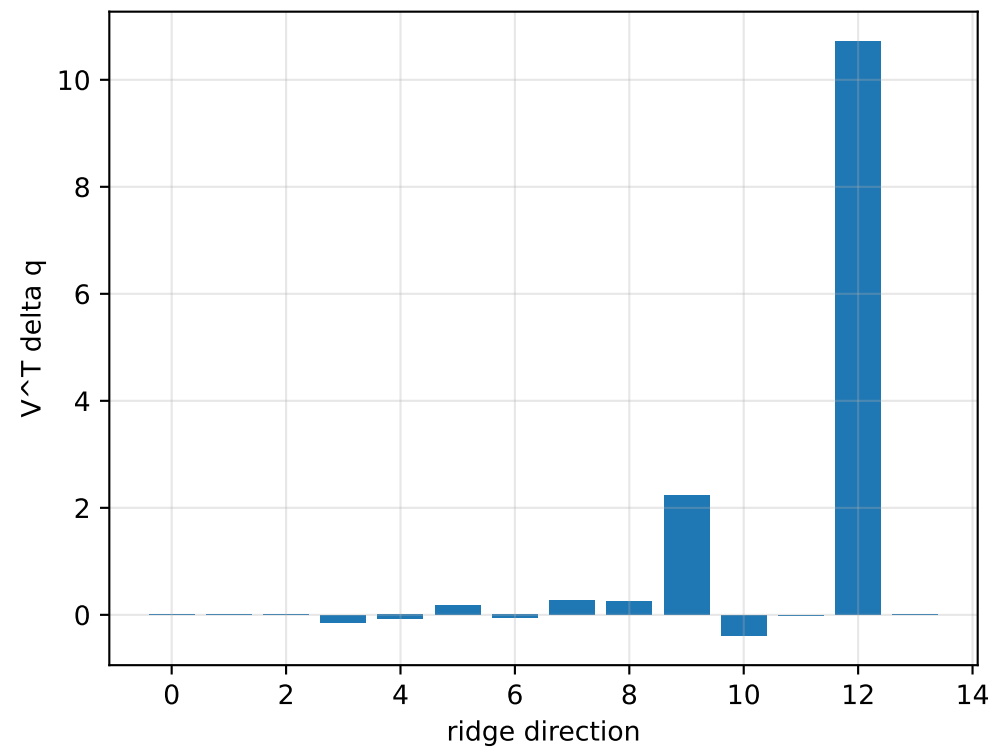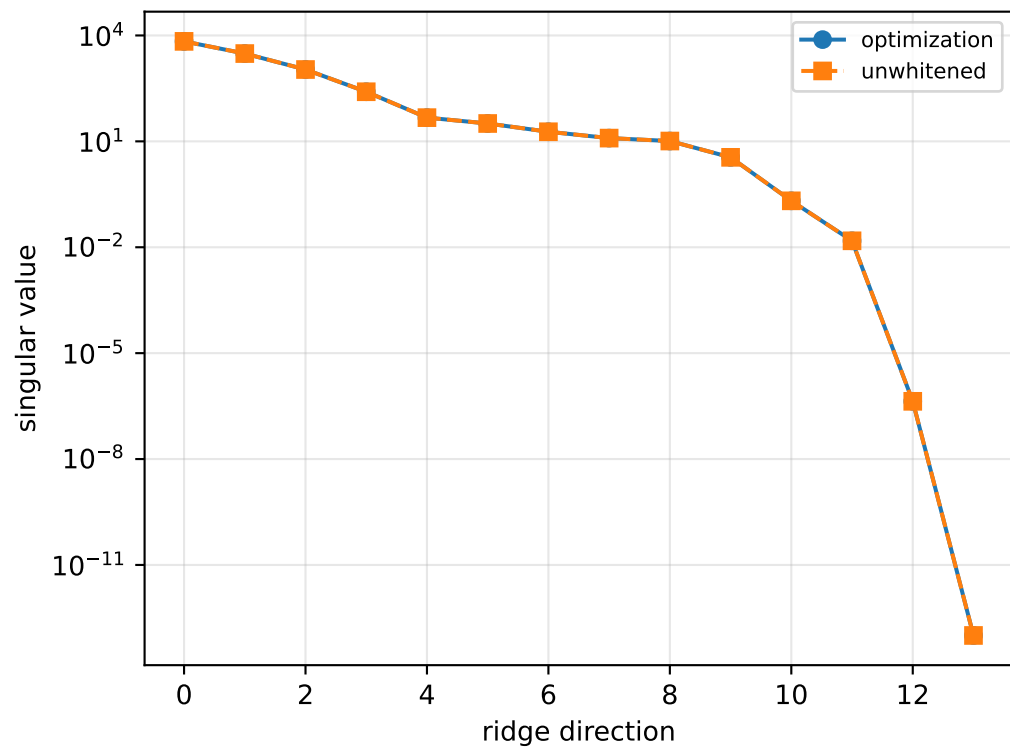

lag_pow2_depth_6: optimization vs reference covariance

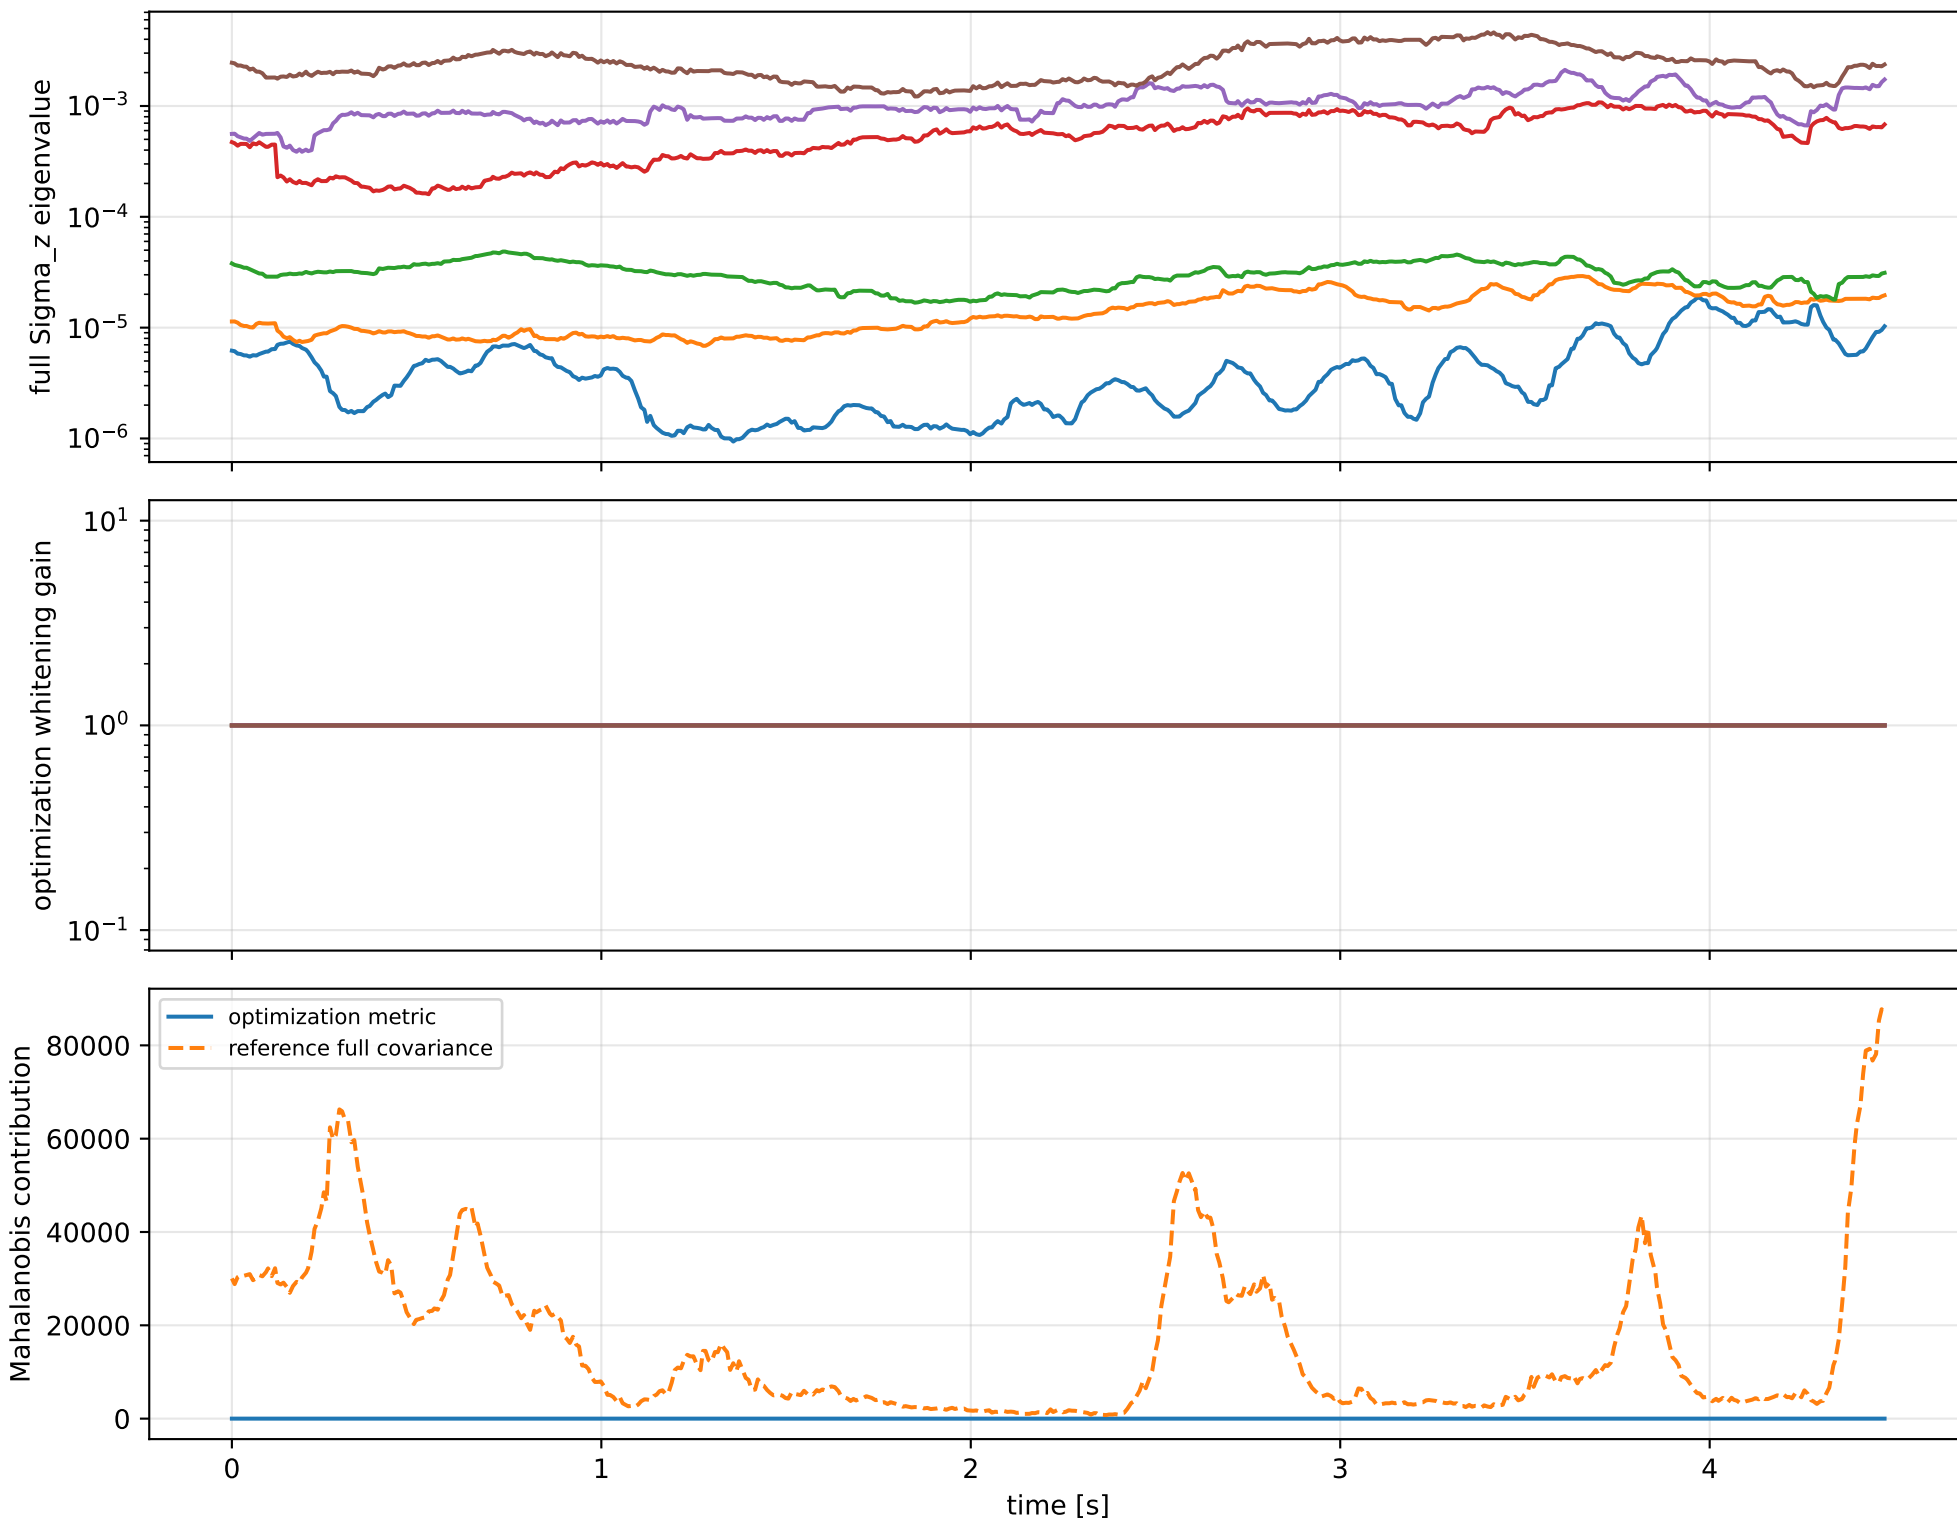

lag_pow2_depth_6: wrench / closure (force max $2.18\text{e-}14$, torque max $3.33\text{e-}16$)

