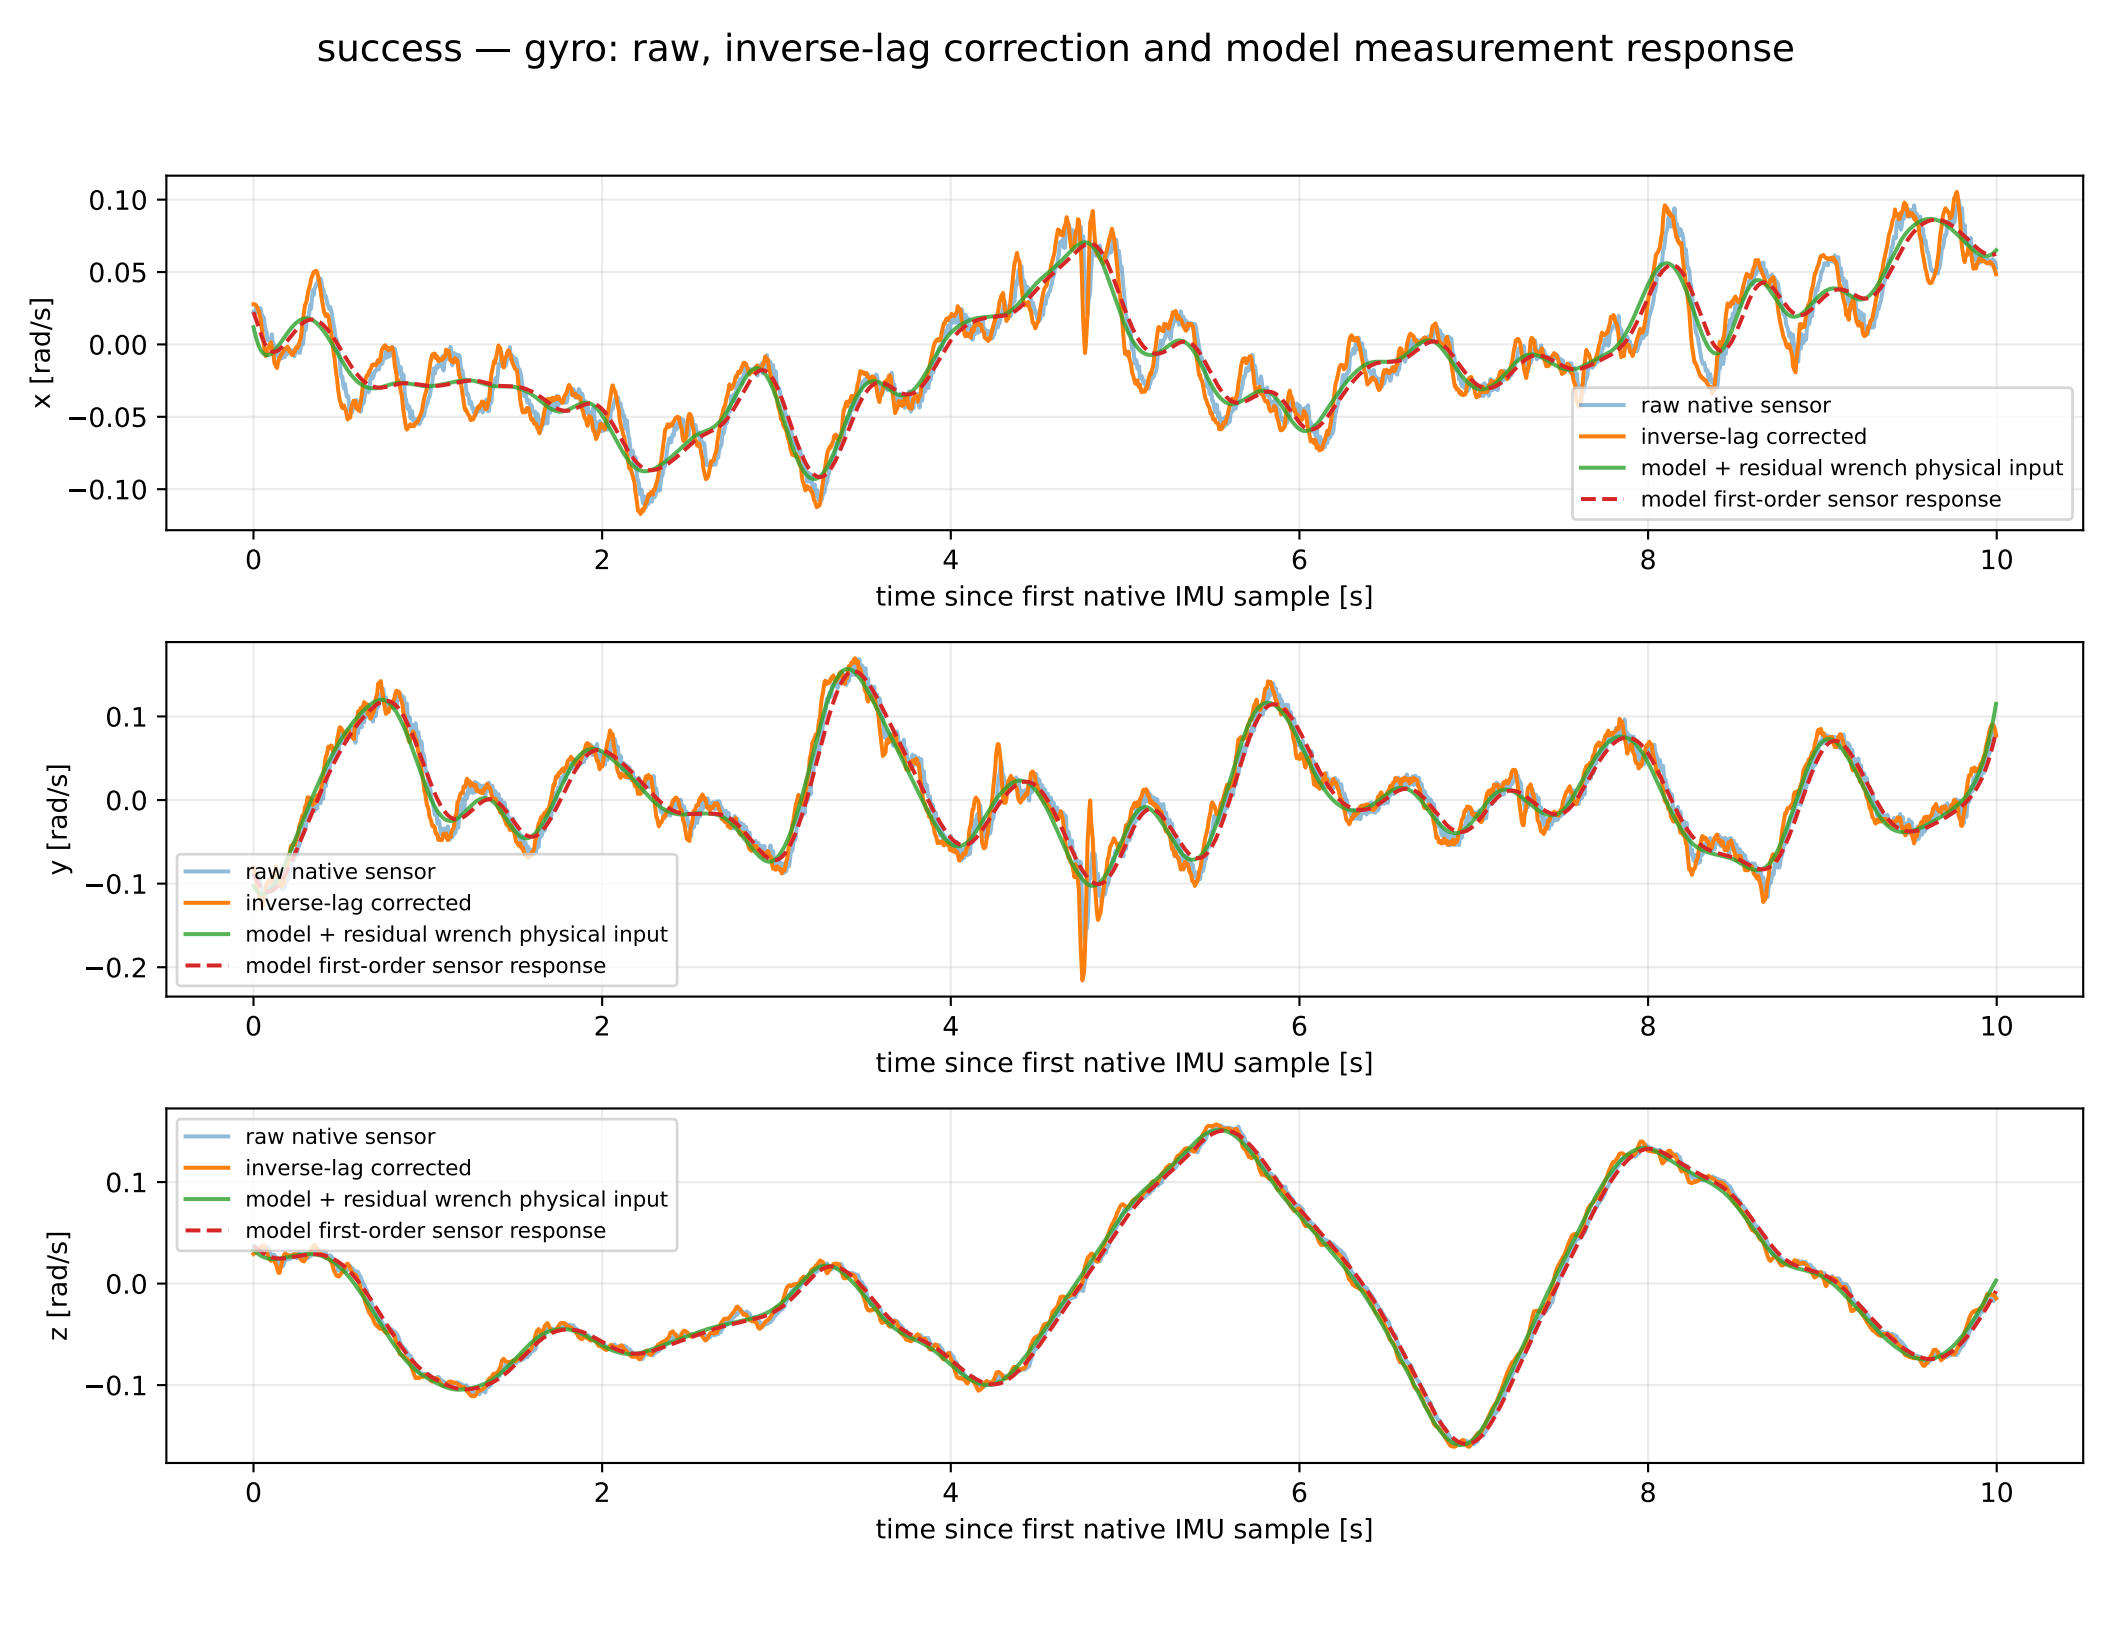
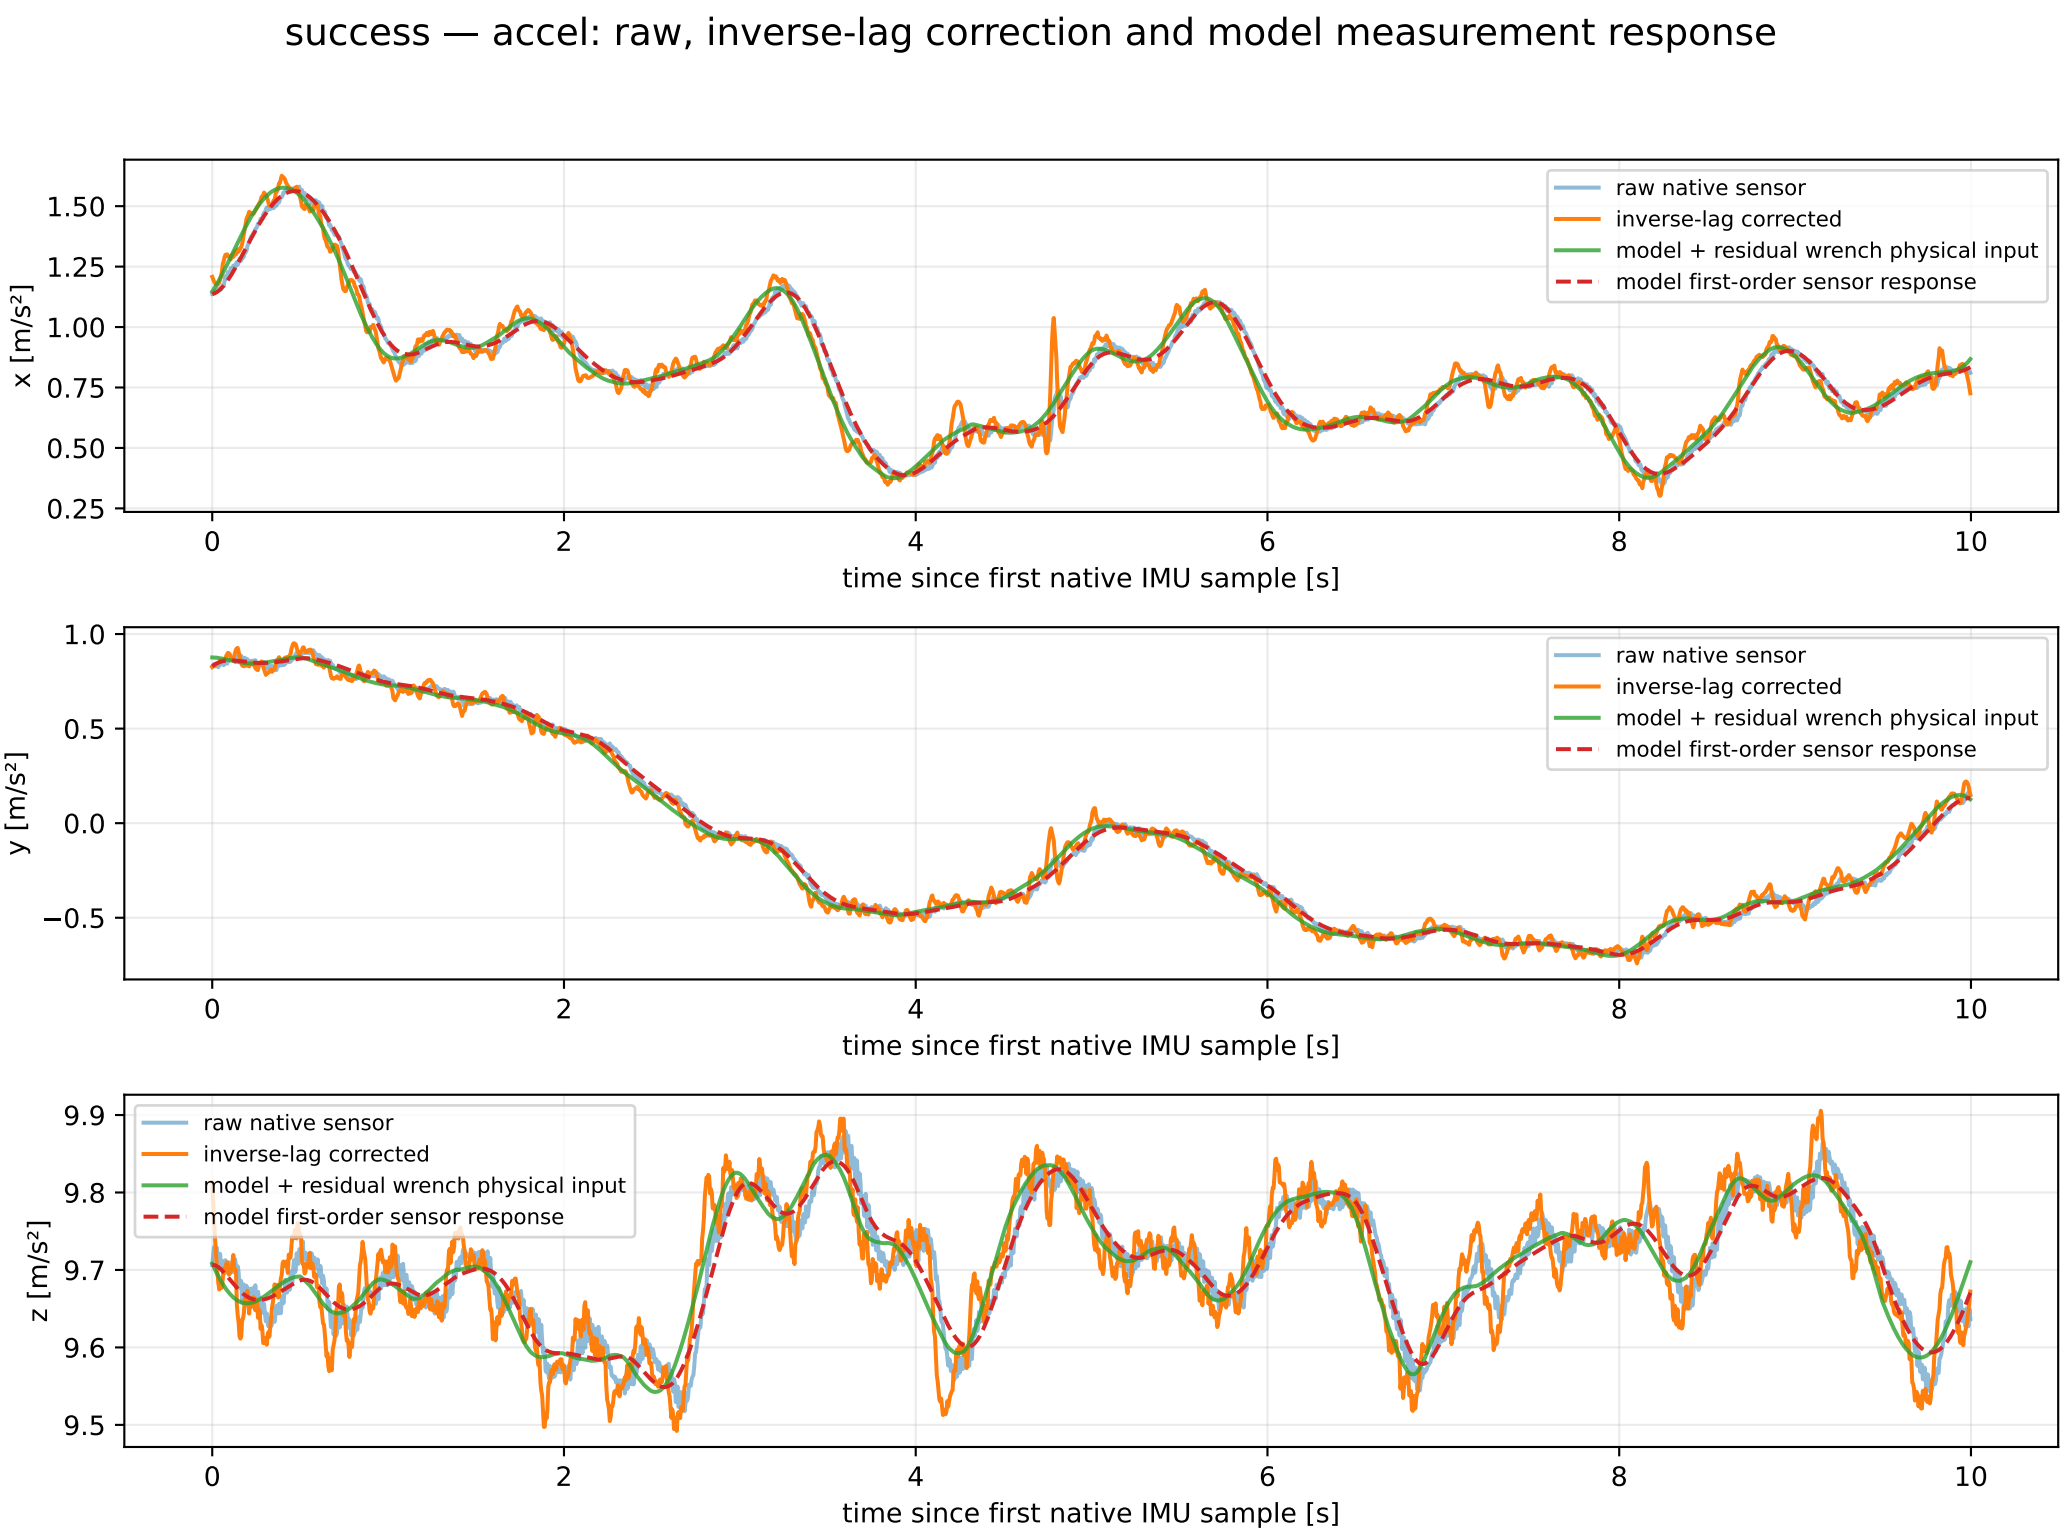

success — gyro: raw, inverse-lag correction and model measurement response
x [rad/s]
y [rad/s]
z [rad/s]
time since first native IMU sample [s]
raw native sensor
inverse-lag corrected
model + residual wrench physical input
model first-order sensor response


success — accel: raw, inverse-lag correction and model measurement response
raw native sensor
inverse-lag corrected
model + residual wrench physical input
model first-order sensor response
x [m/s²]
y [m/s²]
z [m/s²]
time since first native IMU sample [s]