



actuator_direct_command: trajectory

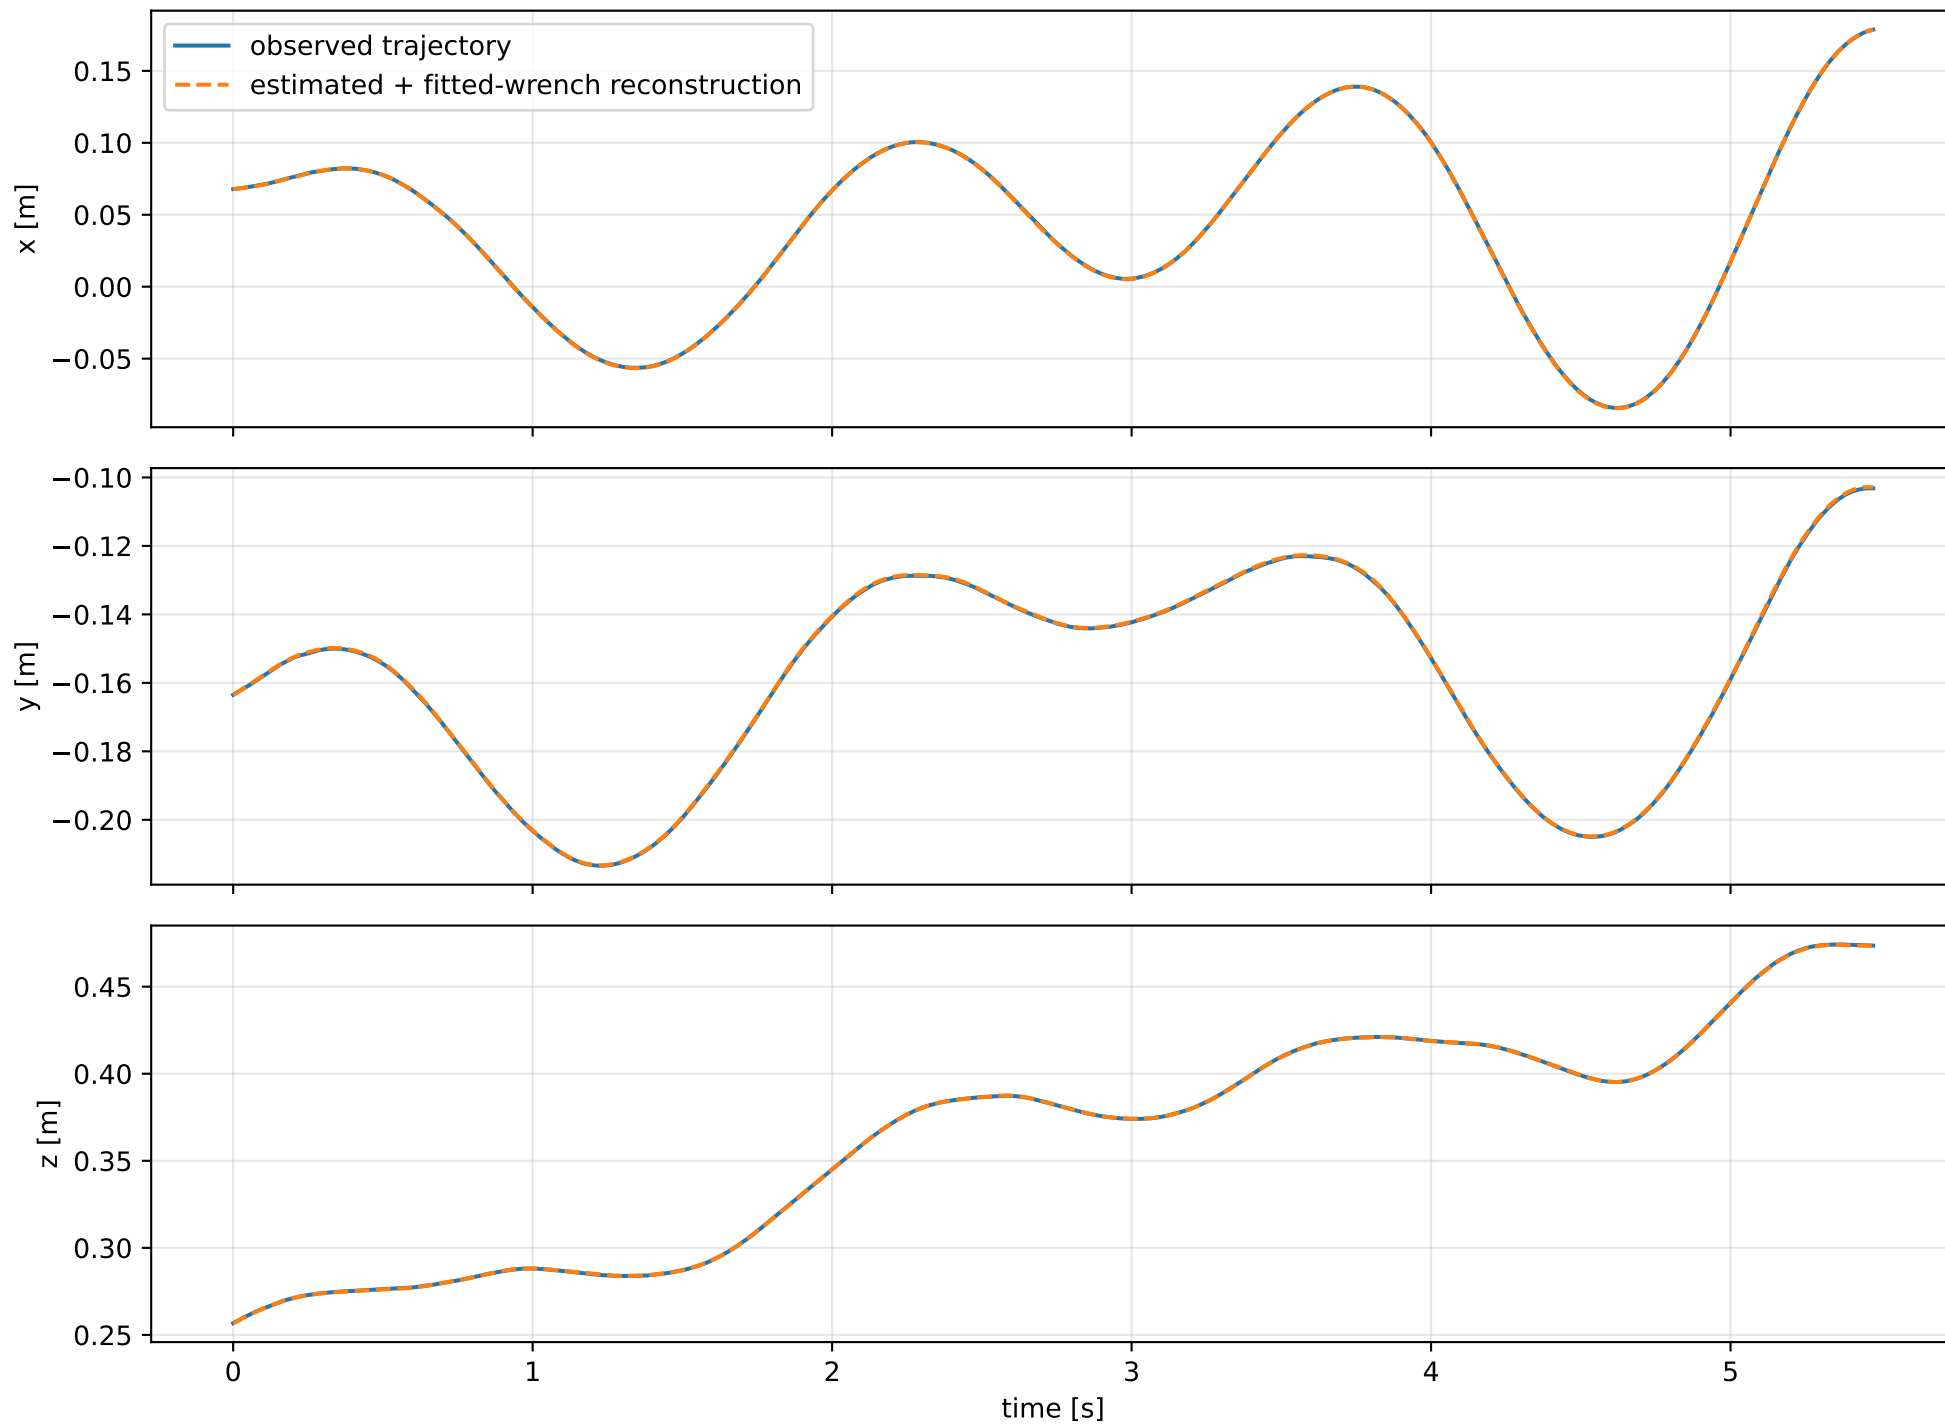


actuator_direct_command: residual wrench

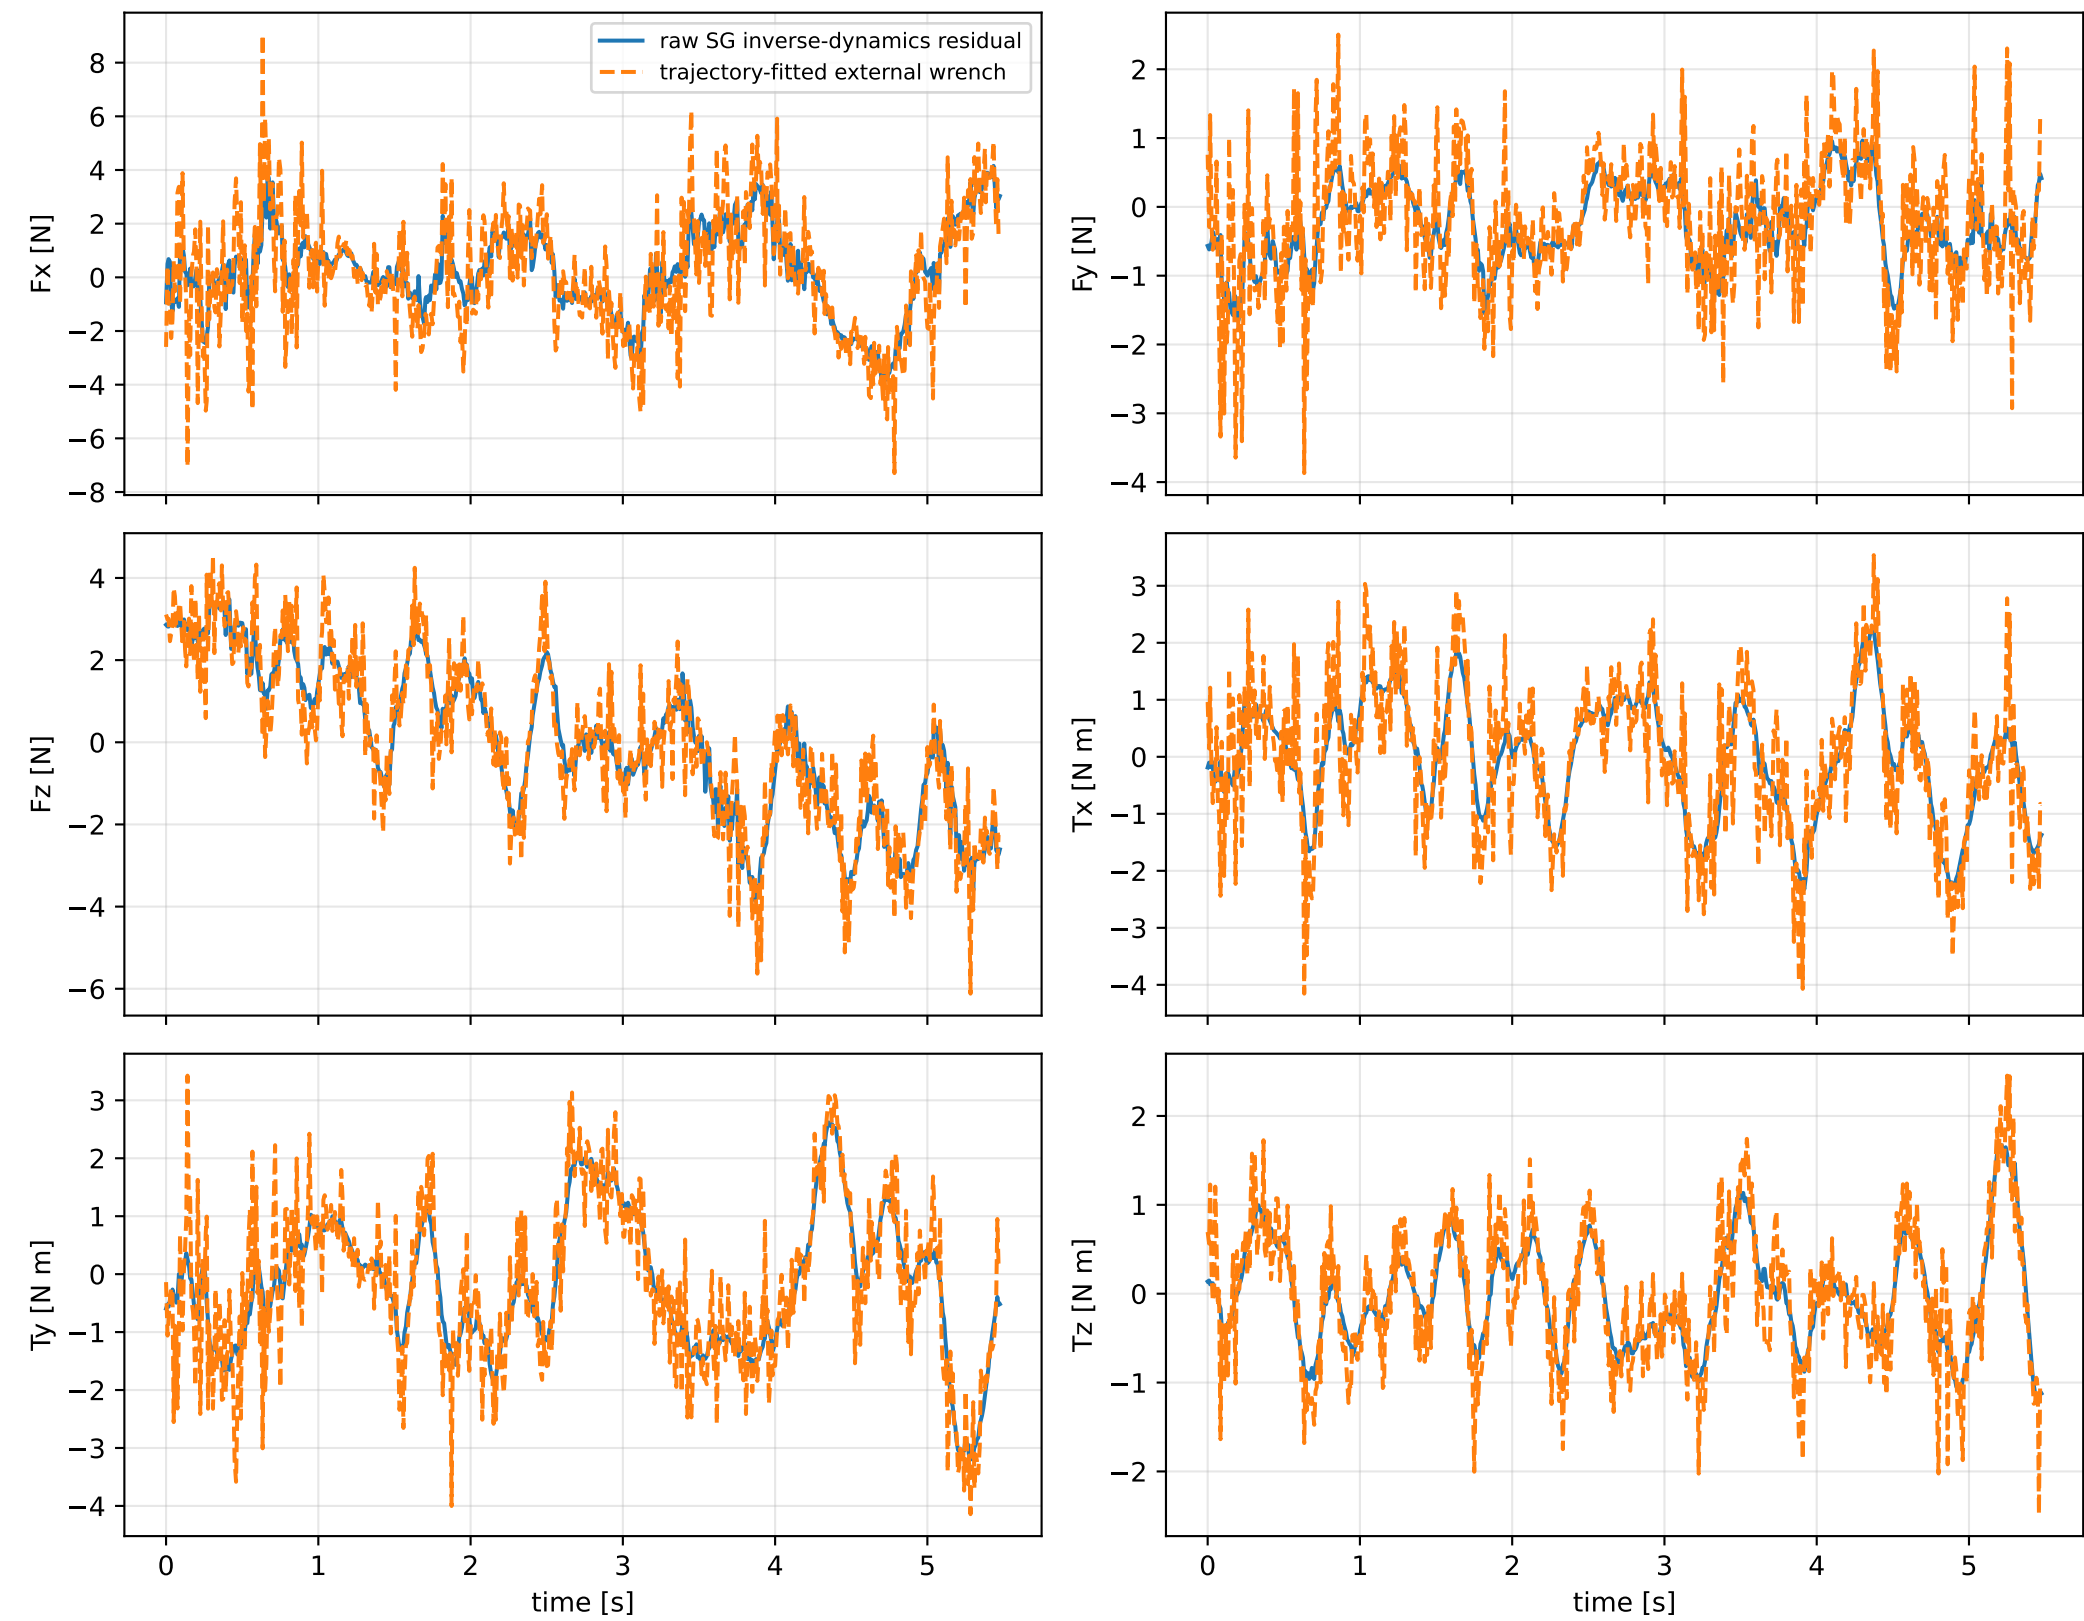


actuator_direct_command: measured sensor comparison

gyro

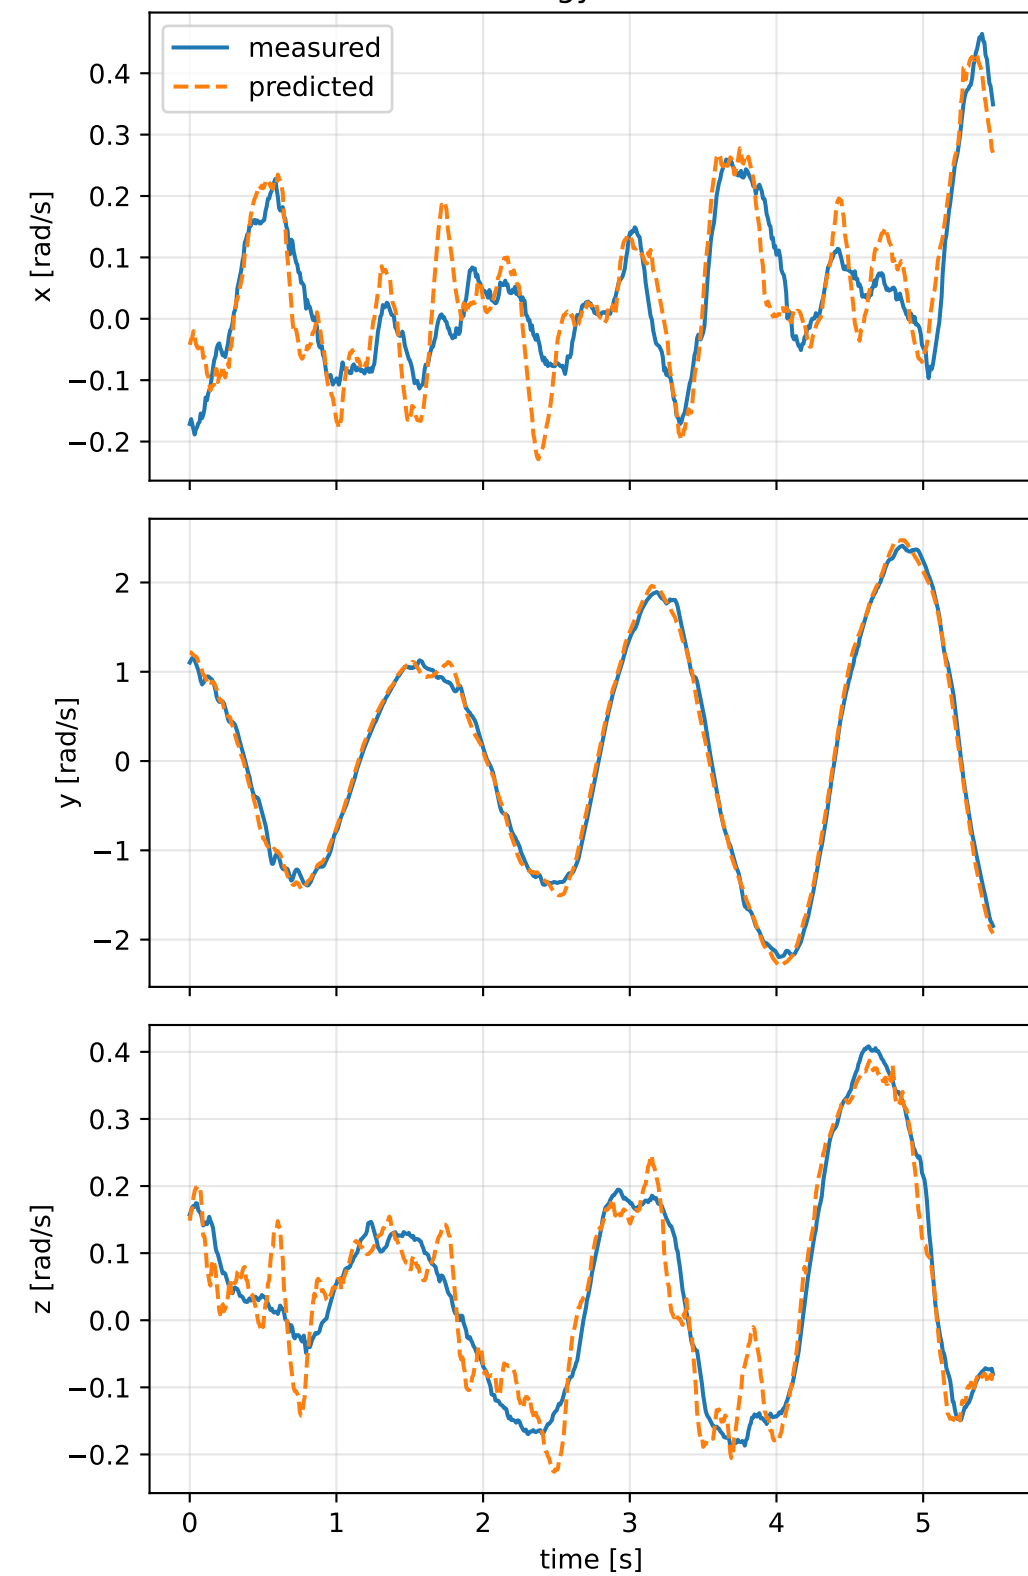

specific force

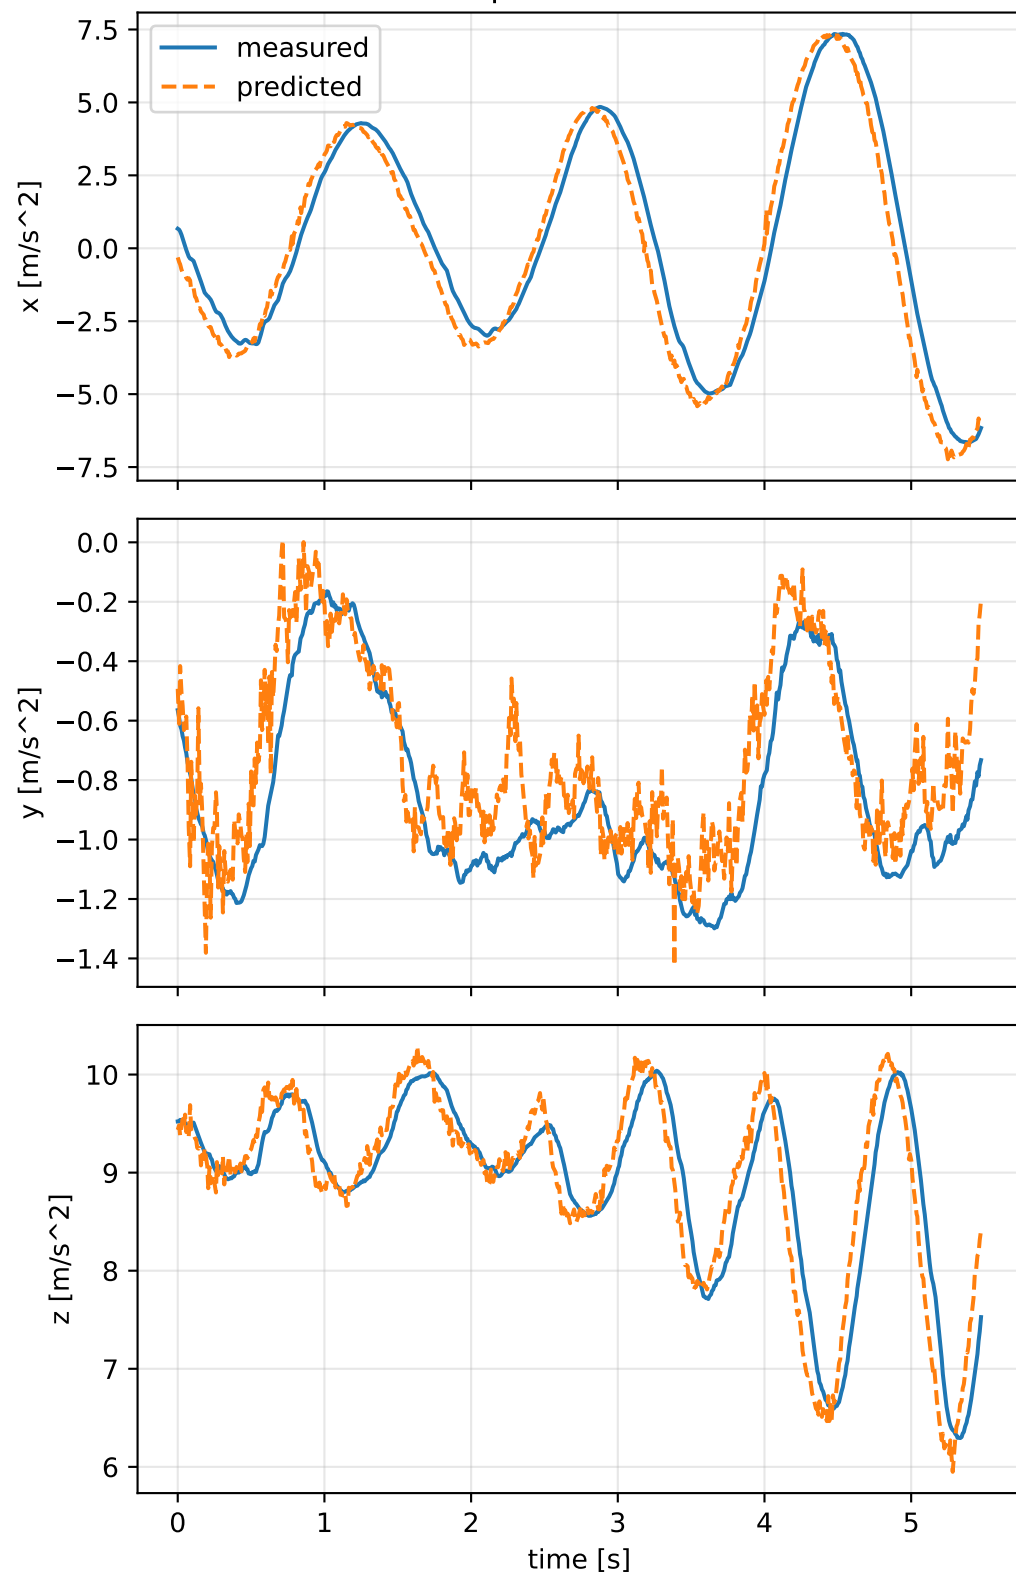

actuator_direct_command: nominal -> estimated parameters

Case: actuator_direct_command

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 4.71878807 delta 2.36719048

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.6226048 0.0700669 0.19429] d=[0.5576047 0.0700676 0.194271]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0700669 0.6018241 -0.2754522] d=[0.0700676 0.5368714 -0.2754522]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.19429 -0.2754522 0.4512708] d=[0.194271 -0.2754522 0.3222787]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0102763 0.1040479 -0.054586] d=[-0.0082516 0.1040784

rotor force effectiveness

[1. 1. 1. 1.] -> [1.1102029 1.0214417 2.3170608 2.3930241] d=[0.1102029 0.0214417 1.3170608 1.3930241]

rotor lag [s] 0.199497193

gimbal lag [s] 0.0532663809