

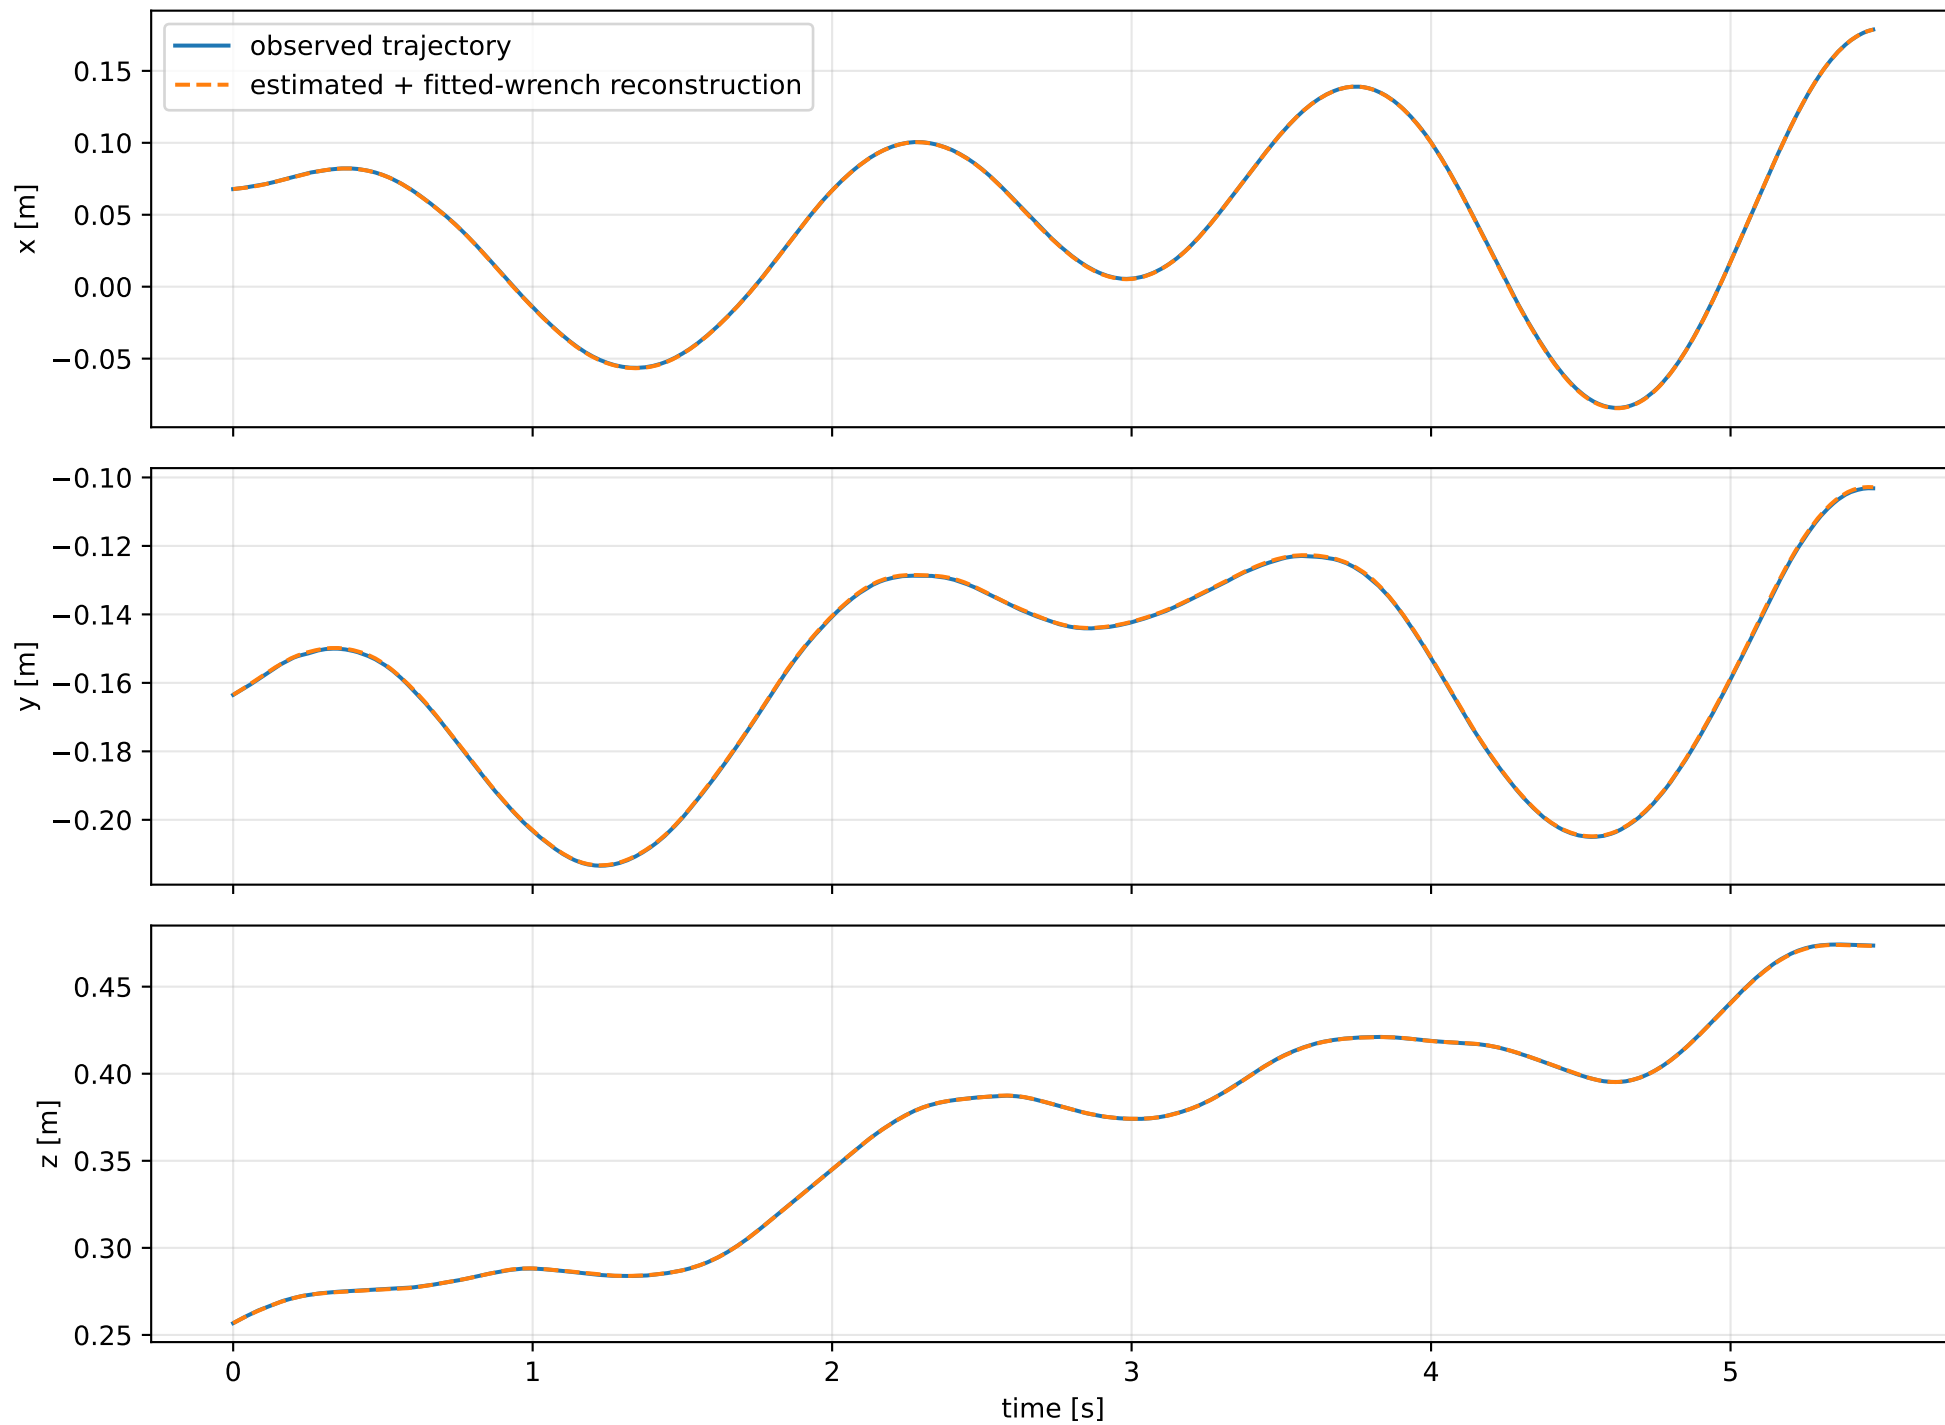
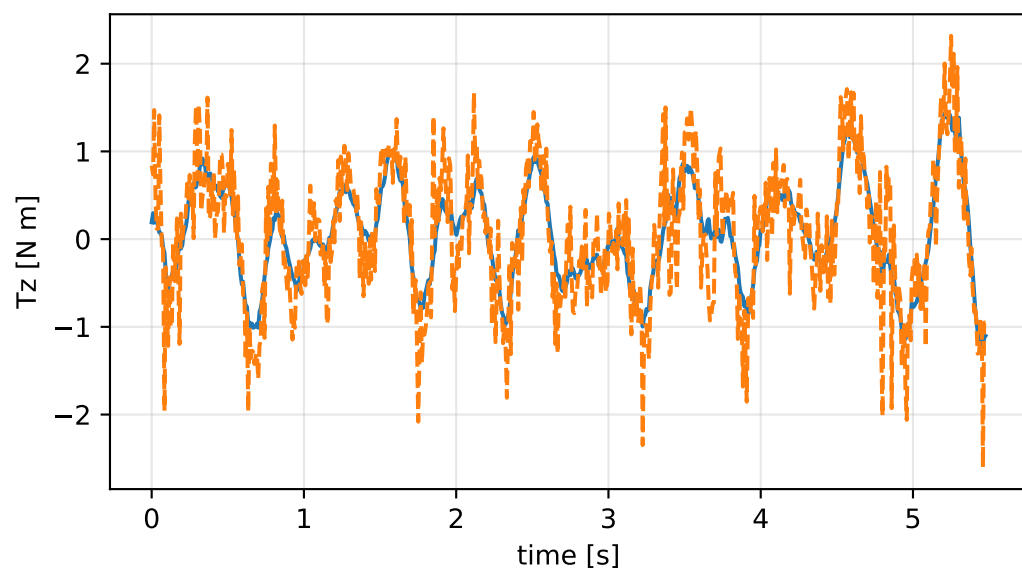
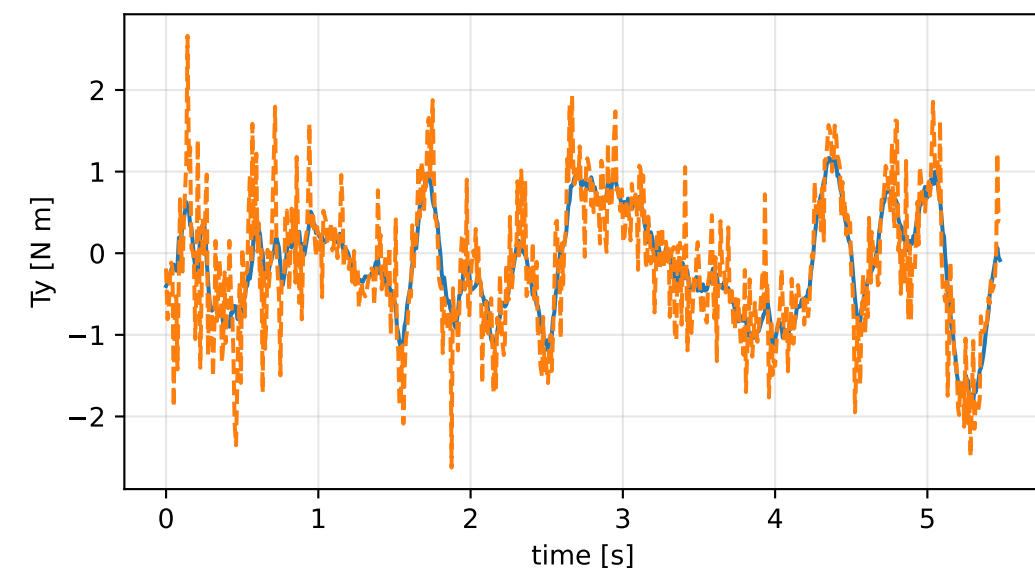
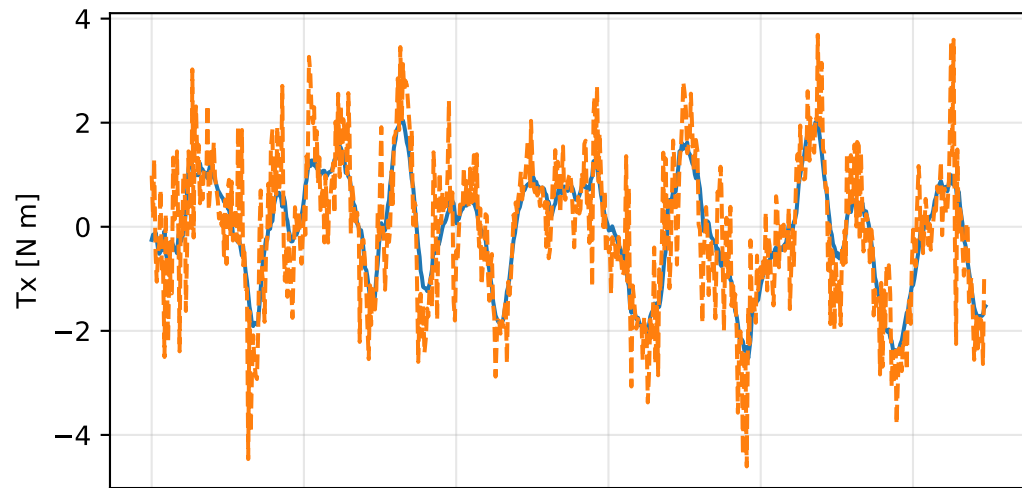
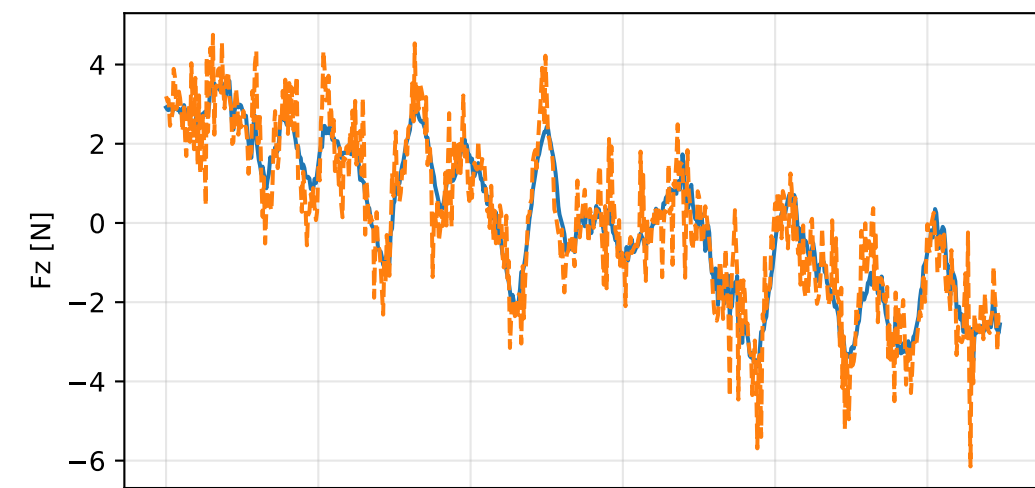


cov_diagonal: trajectory

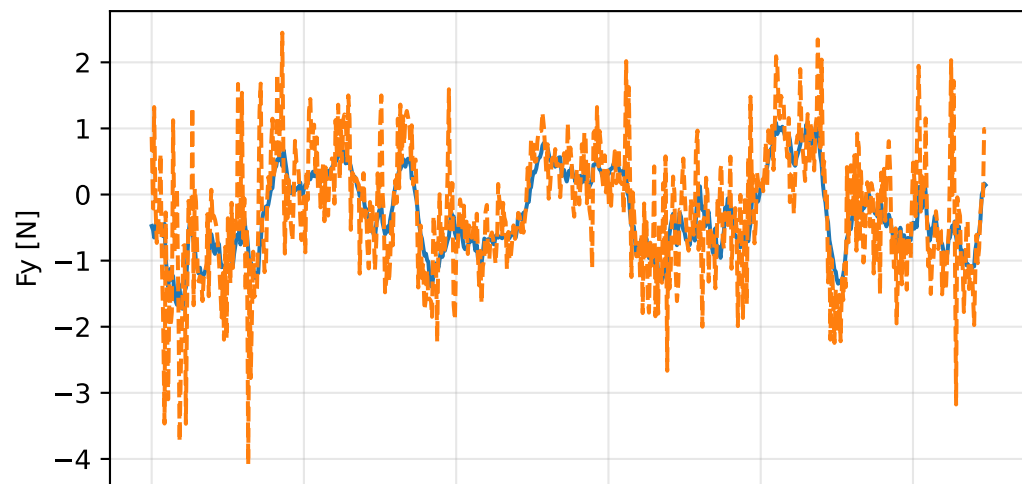


cov_diagonal: residual wrench





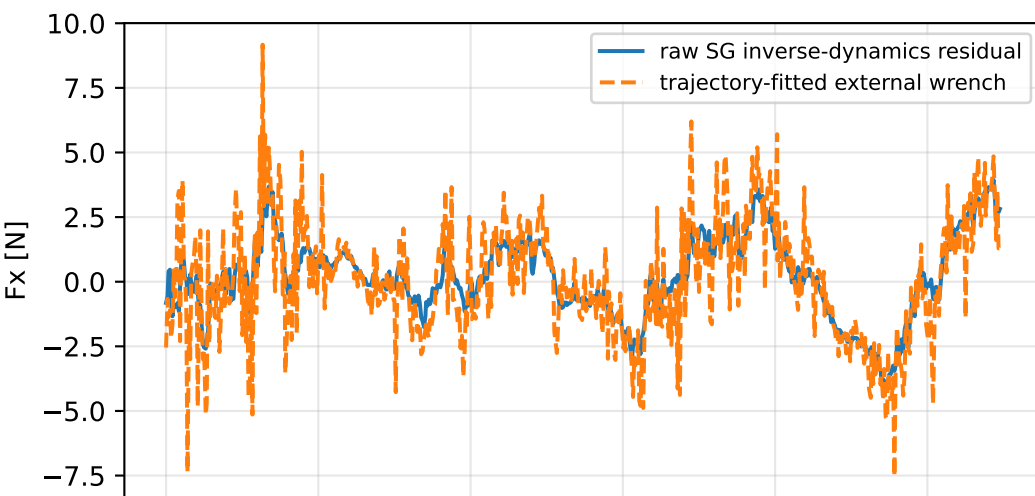


cov_diagonal: measured sensor comparison

gyro

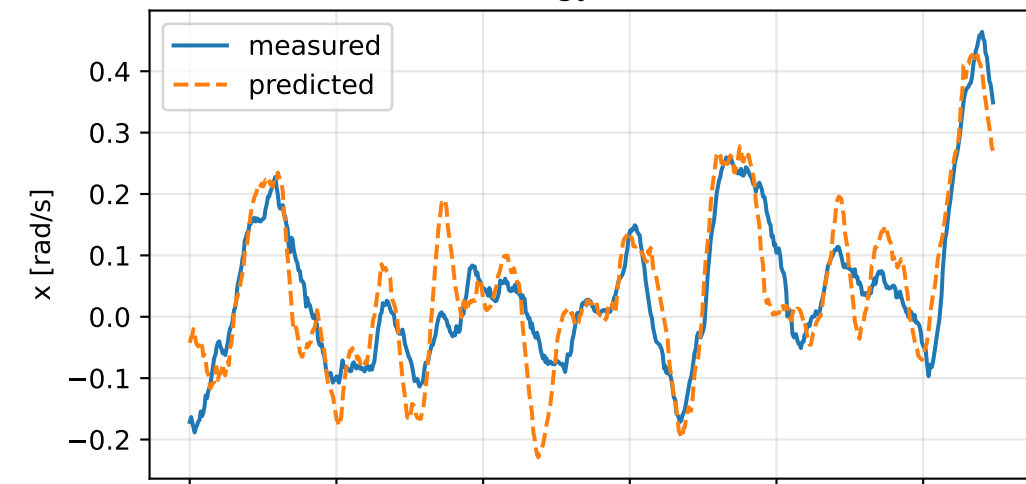

specific force

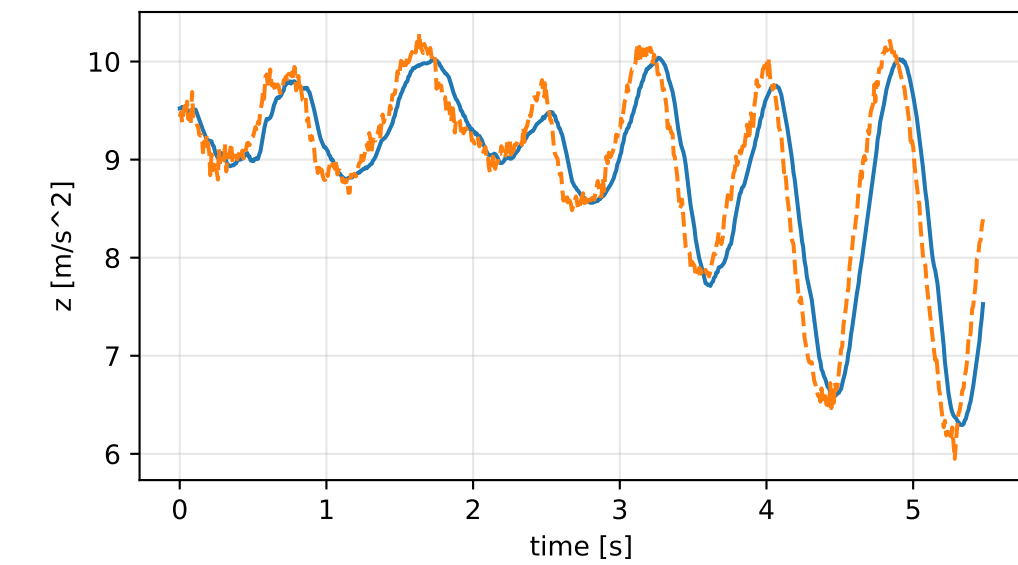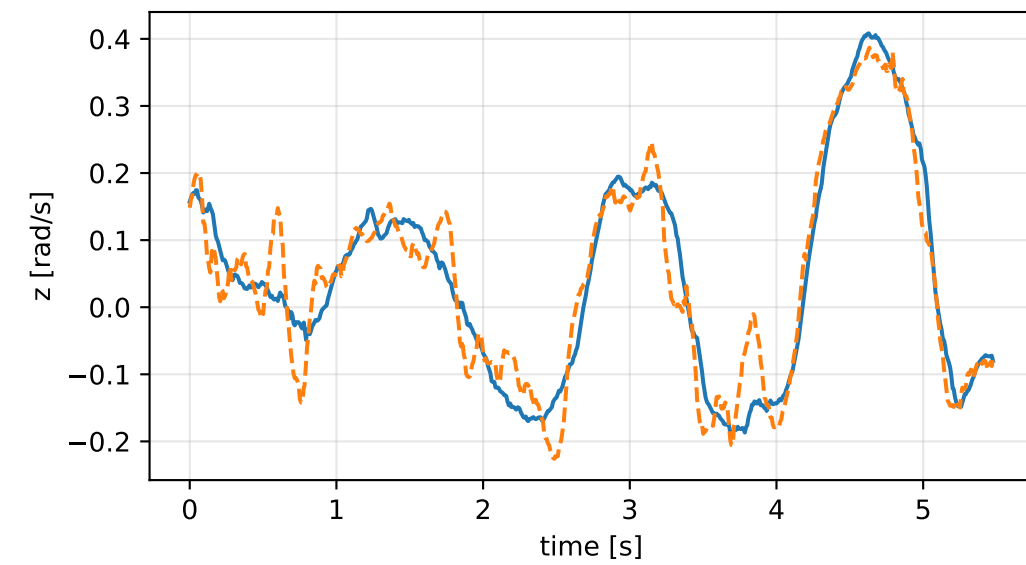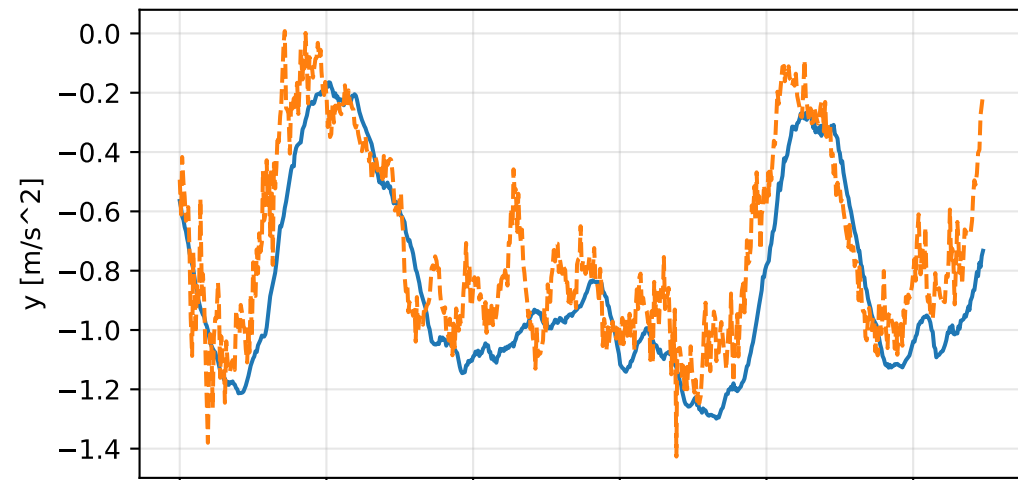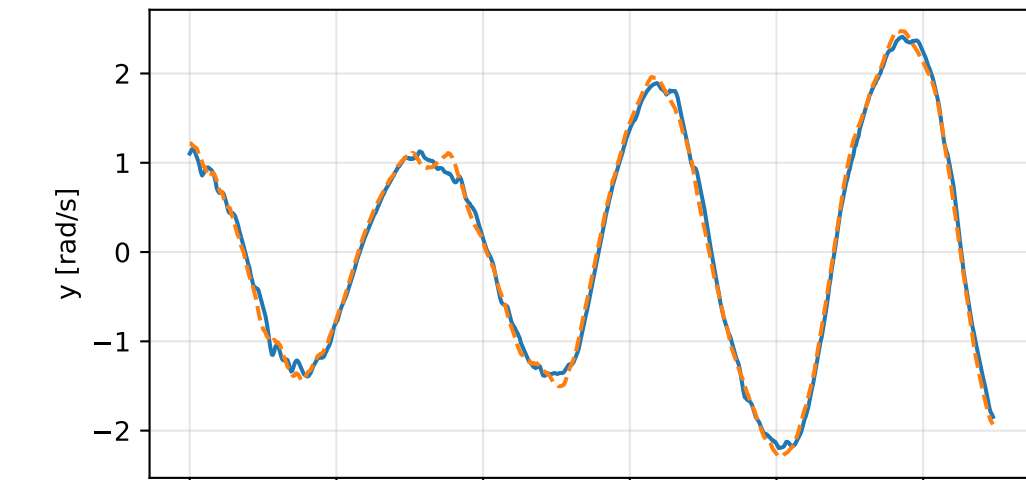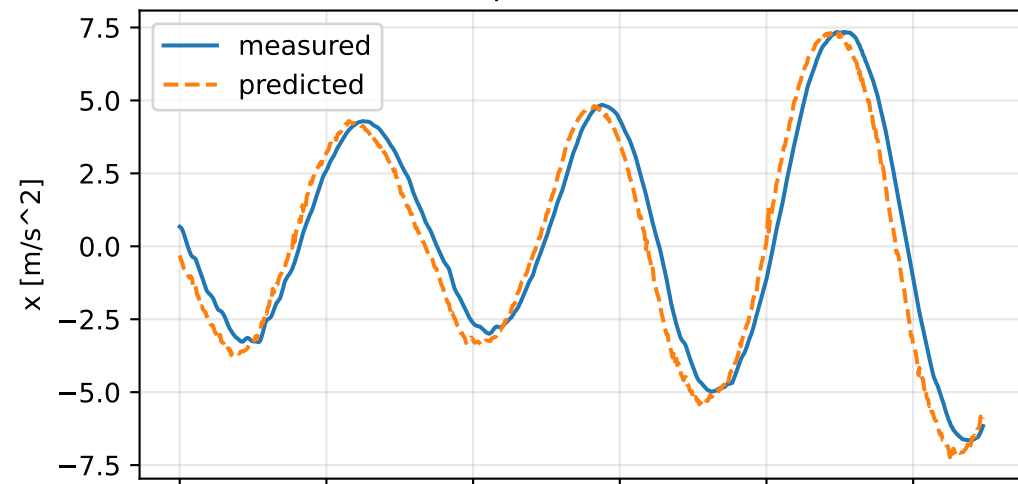

cov_diagonal: nominal -> estimated parameters

Case: cov_diagonal

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 4.70347881 delta 2.35188122

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.7643277 0.0443818 0.1583716] d=[0.6993276 0.0443825 0.1583526]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0443818 0.4678113 -0.2987542] d=[0.0443825 0.4028587 -0.2987542]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.1583716 -0.2987542 0.5601419] d=[0.1583526 -0.2987542 0.4311498]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0039208 0.1161335 -0.0519395] d=[-0.0018961 0.116164

rotor force effectiveness

[1. 1. 1. 1.] -> [0.9659401 0.9421926 2.4646745 2.4318264] d=[-0.0340599 -0.0578074 1.4646745 1.4318264]

rotor lag [s] 0.2

gimbal lag [s] 0.0515559134