



cov_full_no_R_uncertainty_in_s: trajectory

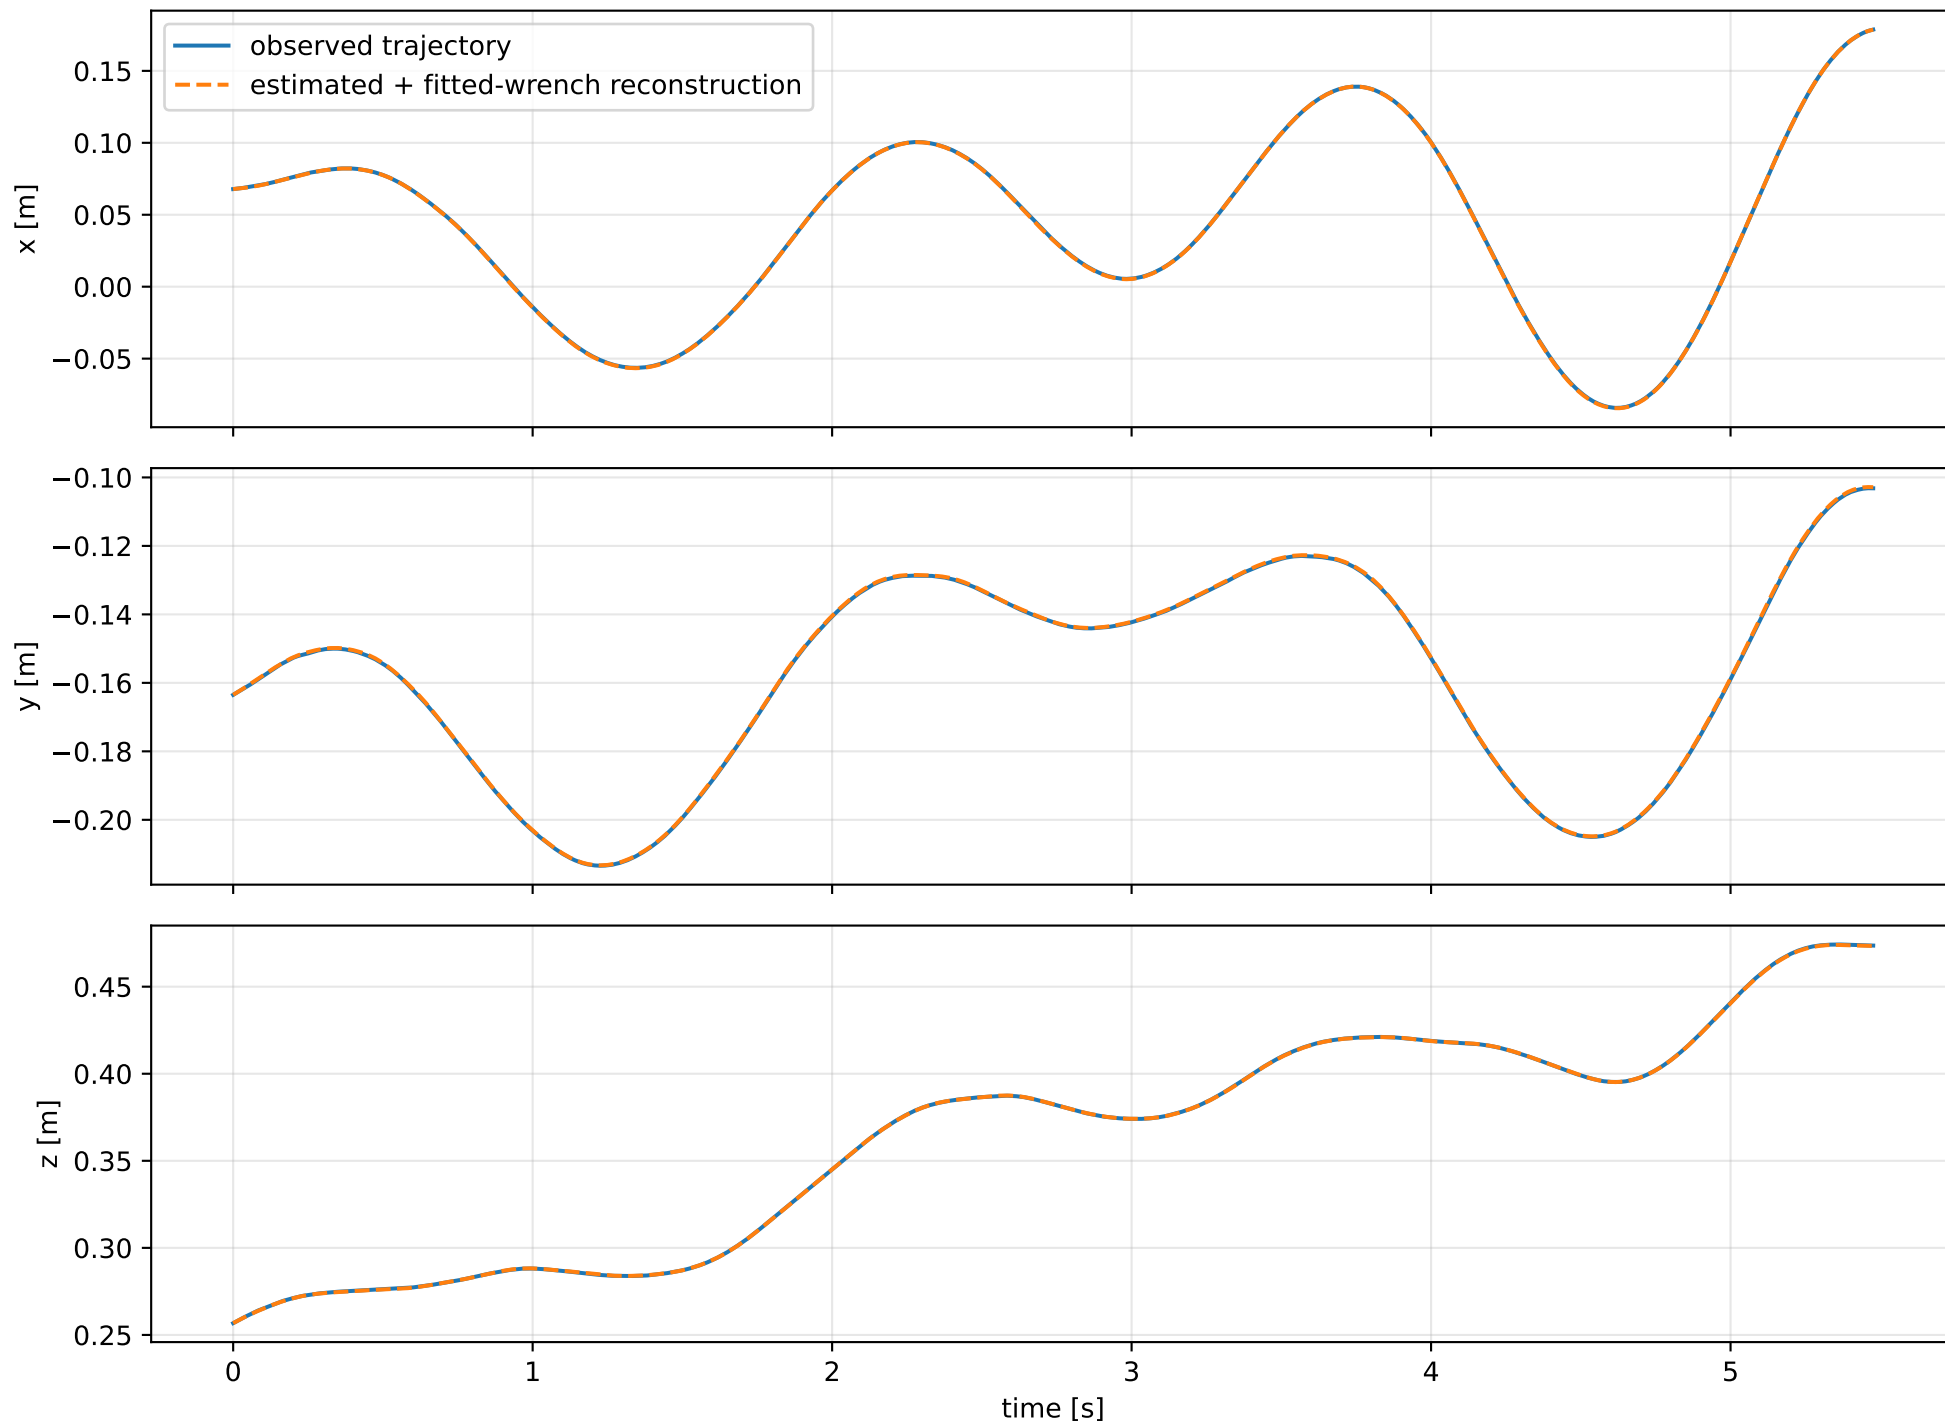



cov_full_no_R_uncertainty_in_s: residual wrench

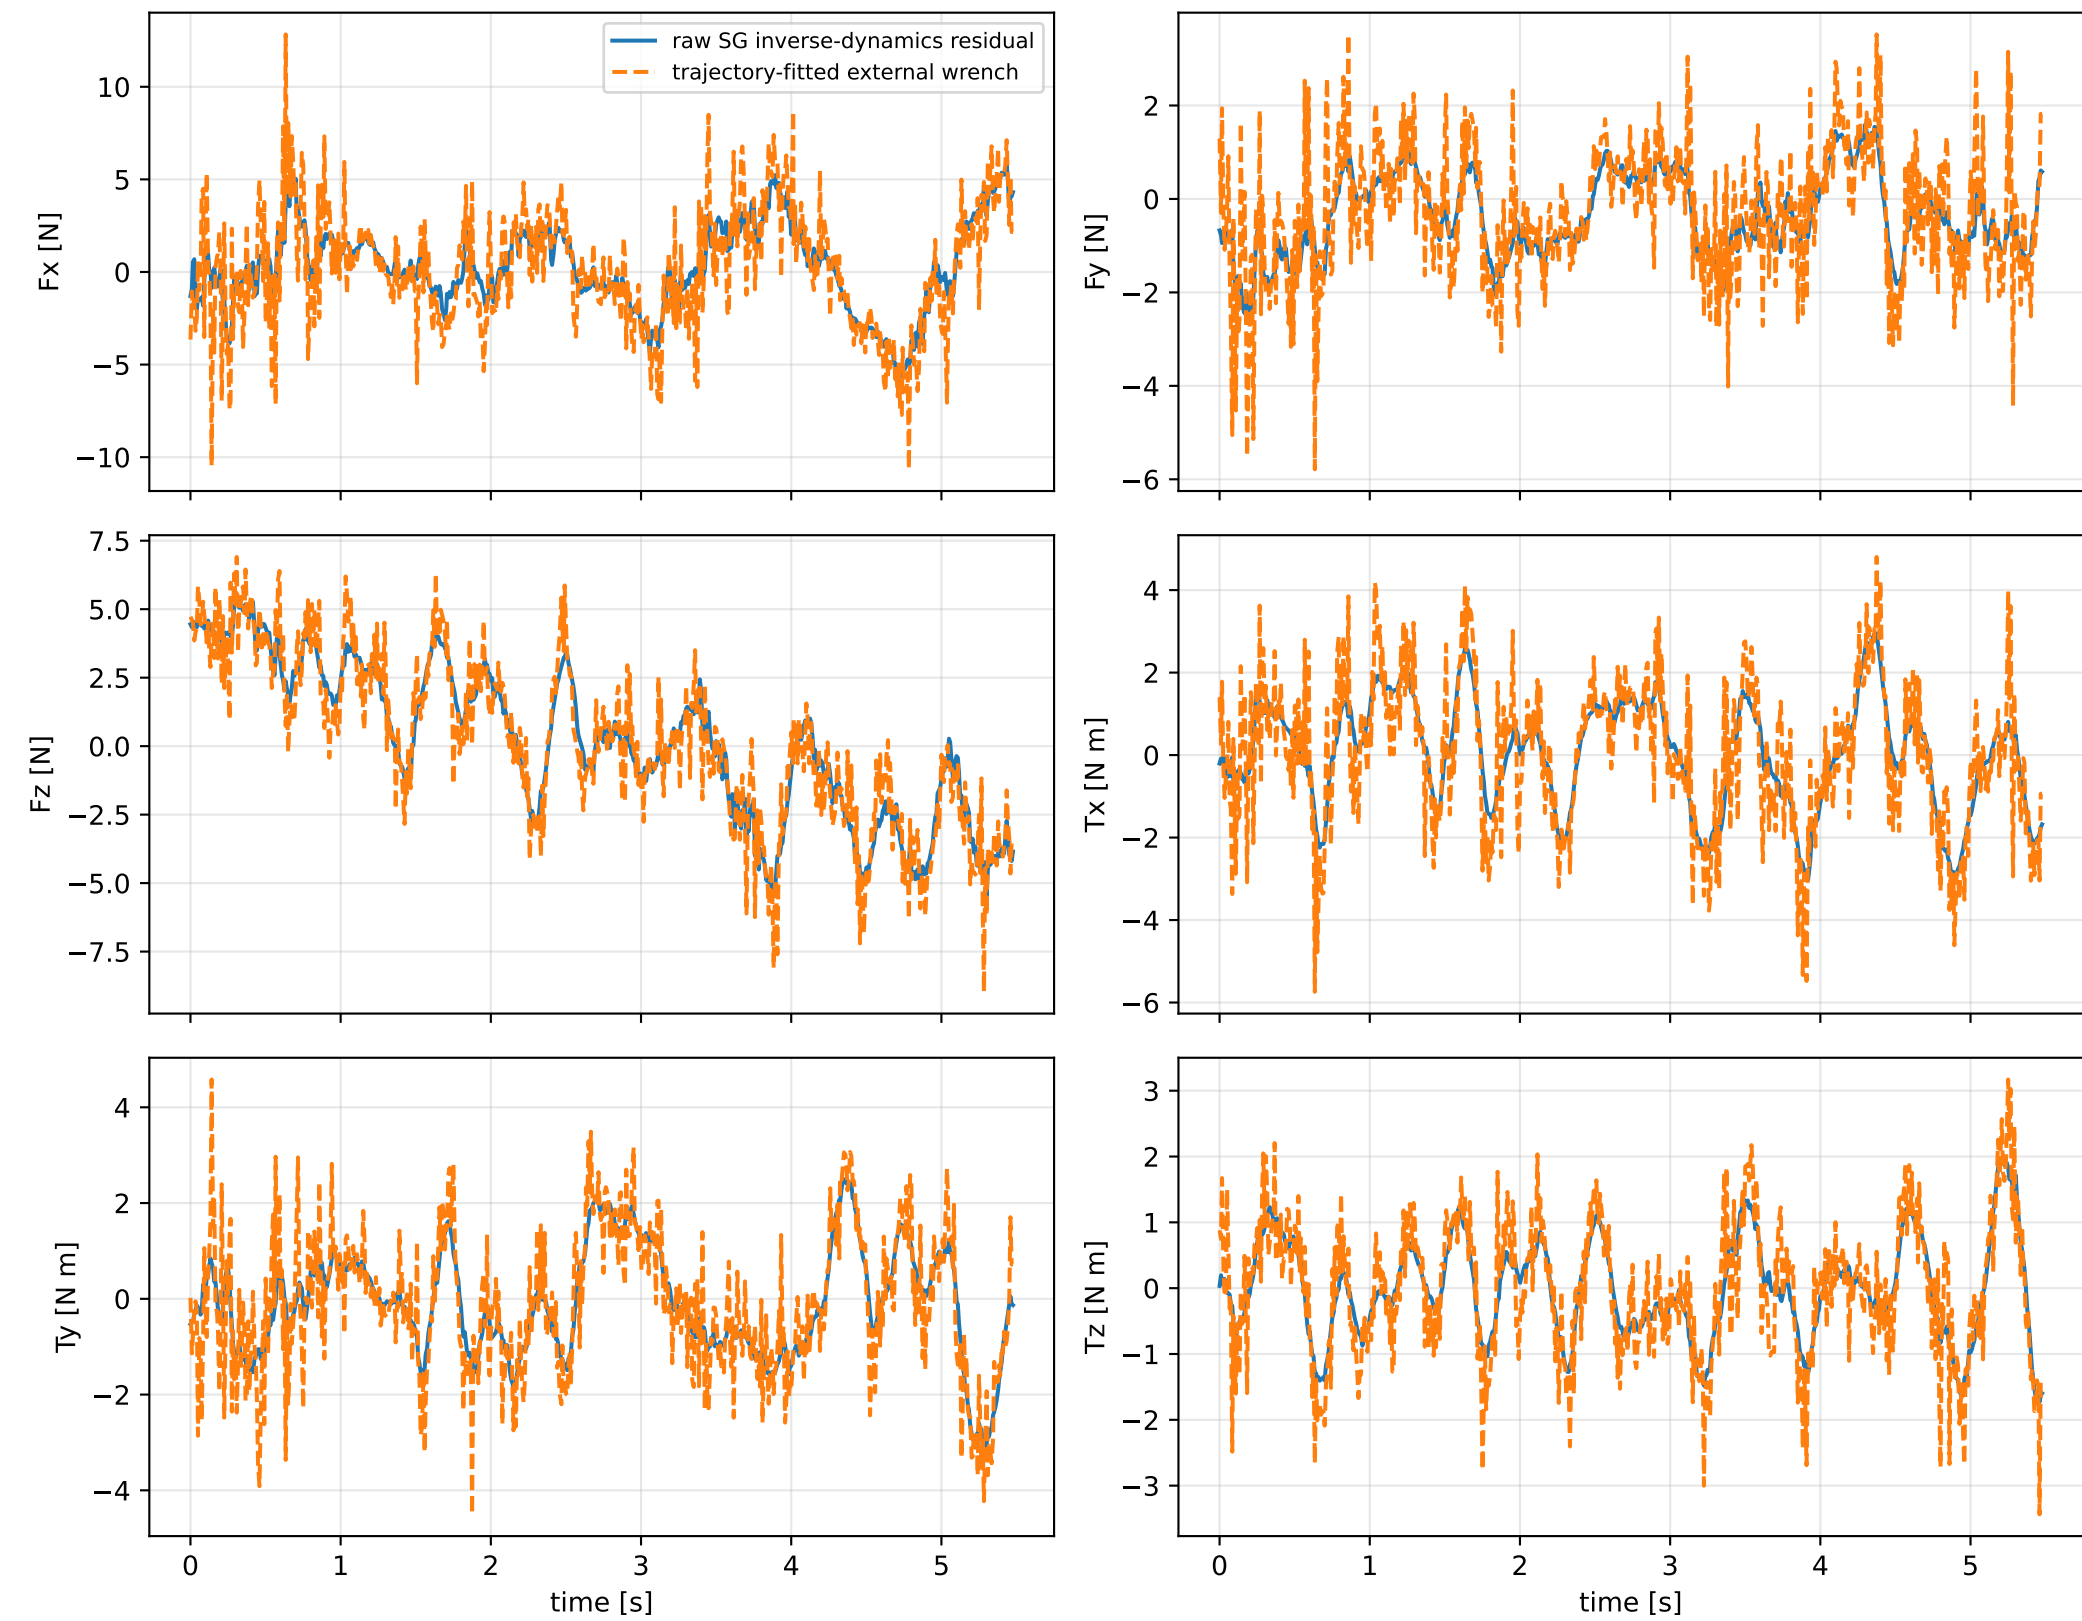

cov_full_no_R_uncertainty_in_s: measured sensor comparison

gyro

specific force

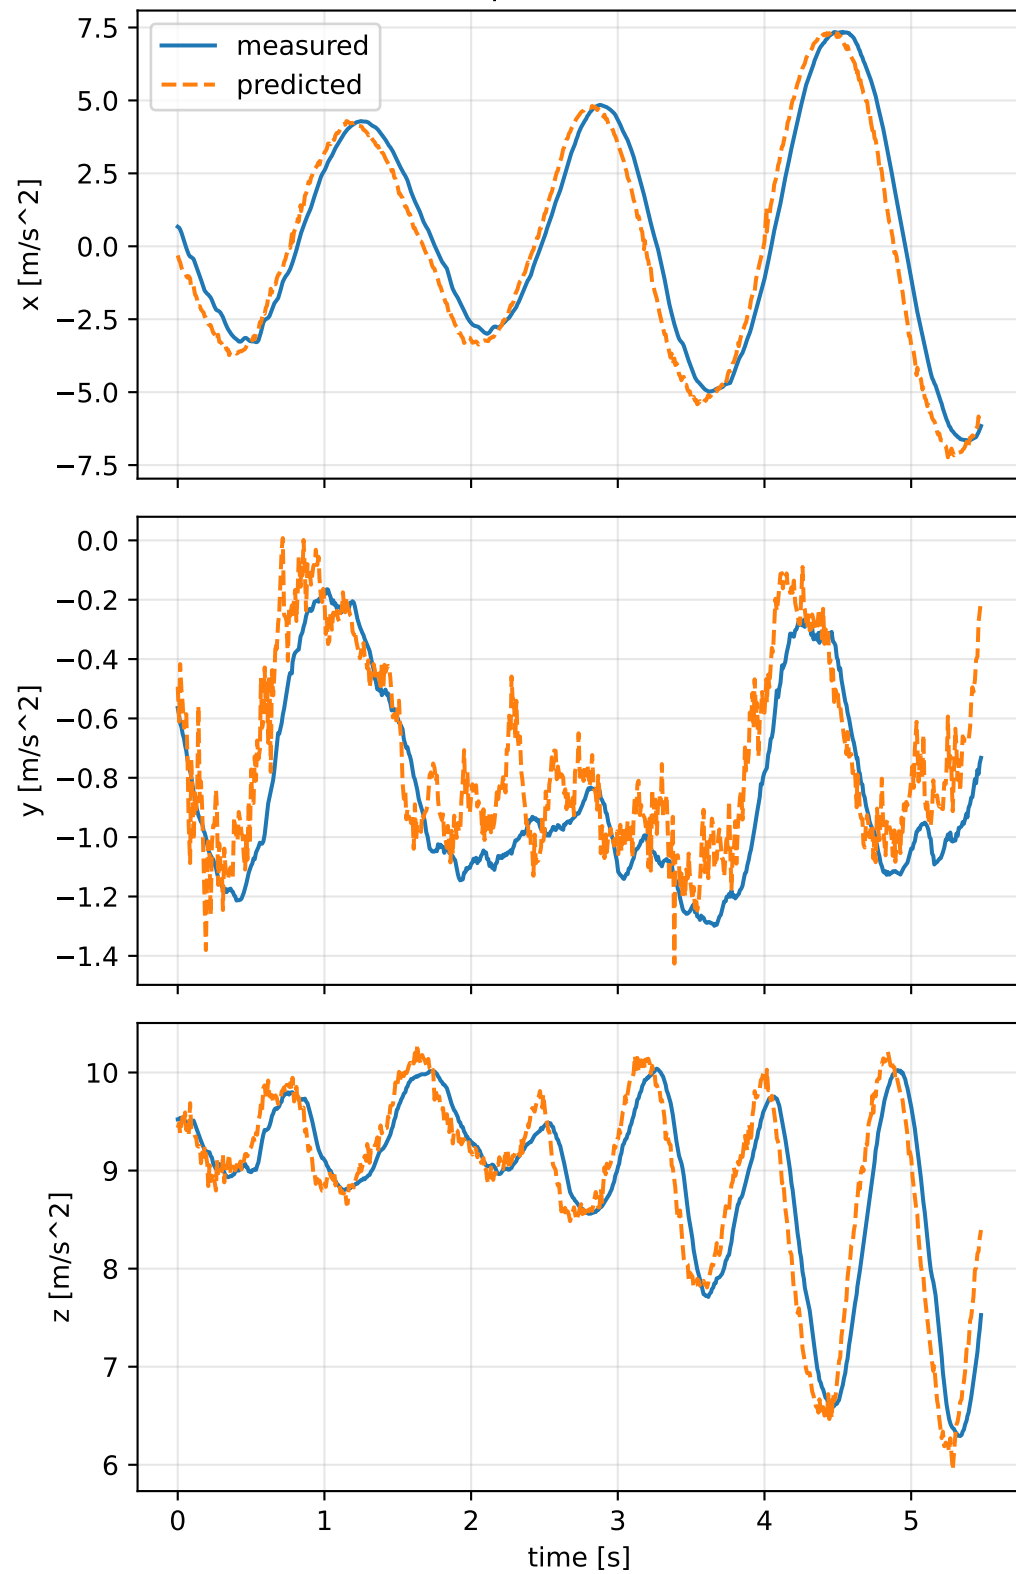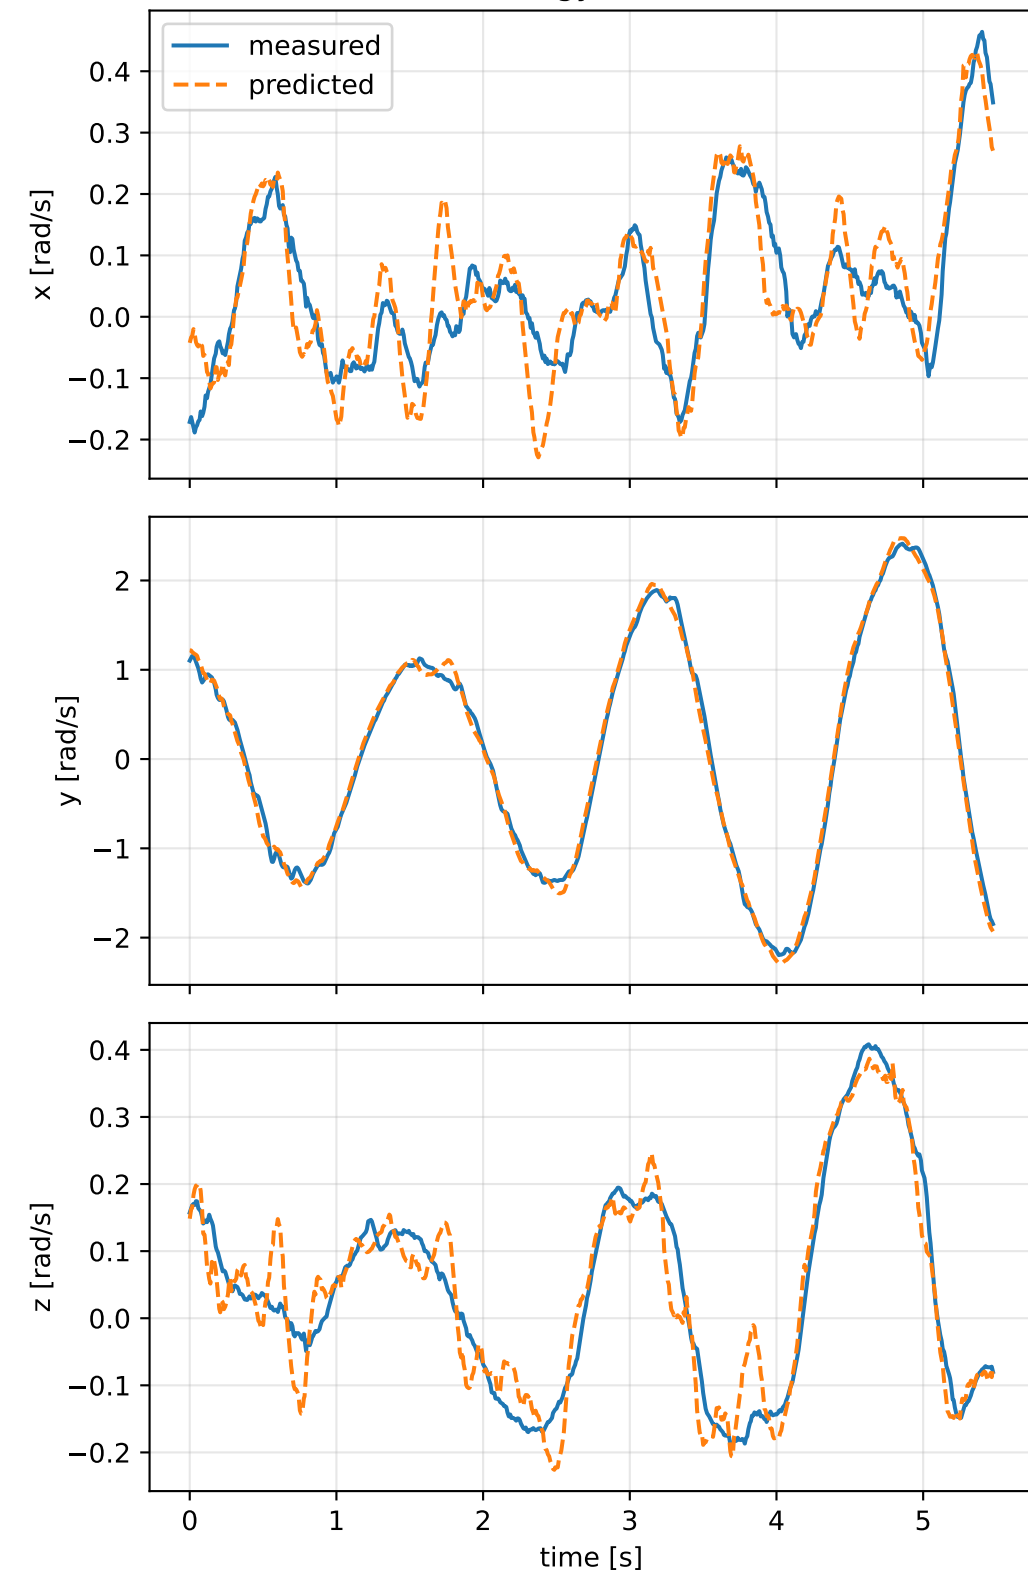

cov_full_no_R_uncertainty_in_s: nominal -> estimated parameters

Case: cov_full_no_R_uncertainty_in_s
status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 7.07769055 delta 4.72609296

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.8695963 0.0895564 0.2802323] d=[0.8045962 0.0895571 0.2802133]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0895564 0.7361775 -0.3462717] d=[0.0895571 0.6712249 -0.3462717]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.2802323 -0.3462717 0.6336407] d=[0.2802133 -0.3462717 0.5046486]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0069302 0.095817 -0.0484272] d=[-0.0049055 0.0958475

rotor force effectiveness

[1. 1. 1. 1.] -> [1.6979271 1.6510555 3.4546052 3.4339569] d=[0.6979271 0.6510555 2.4546052 2.4339569]

rotor lag [s] 0.199999988

gimbal lag [s] 0.0516387094