



cov_full_no_position_rotation_cross: trajectory

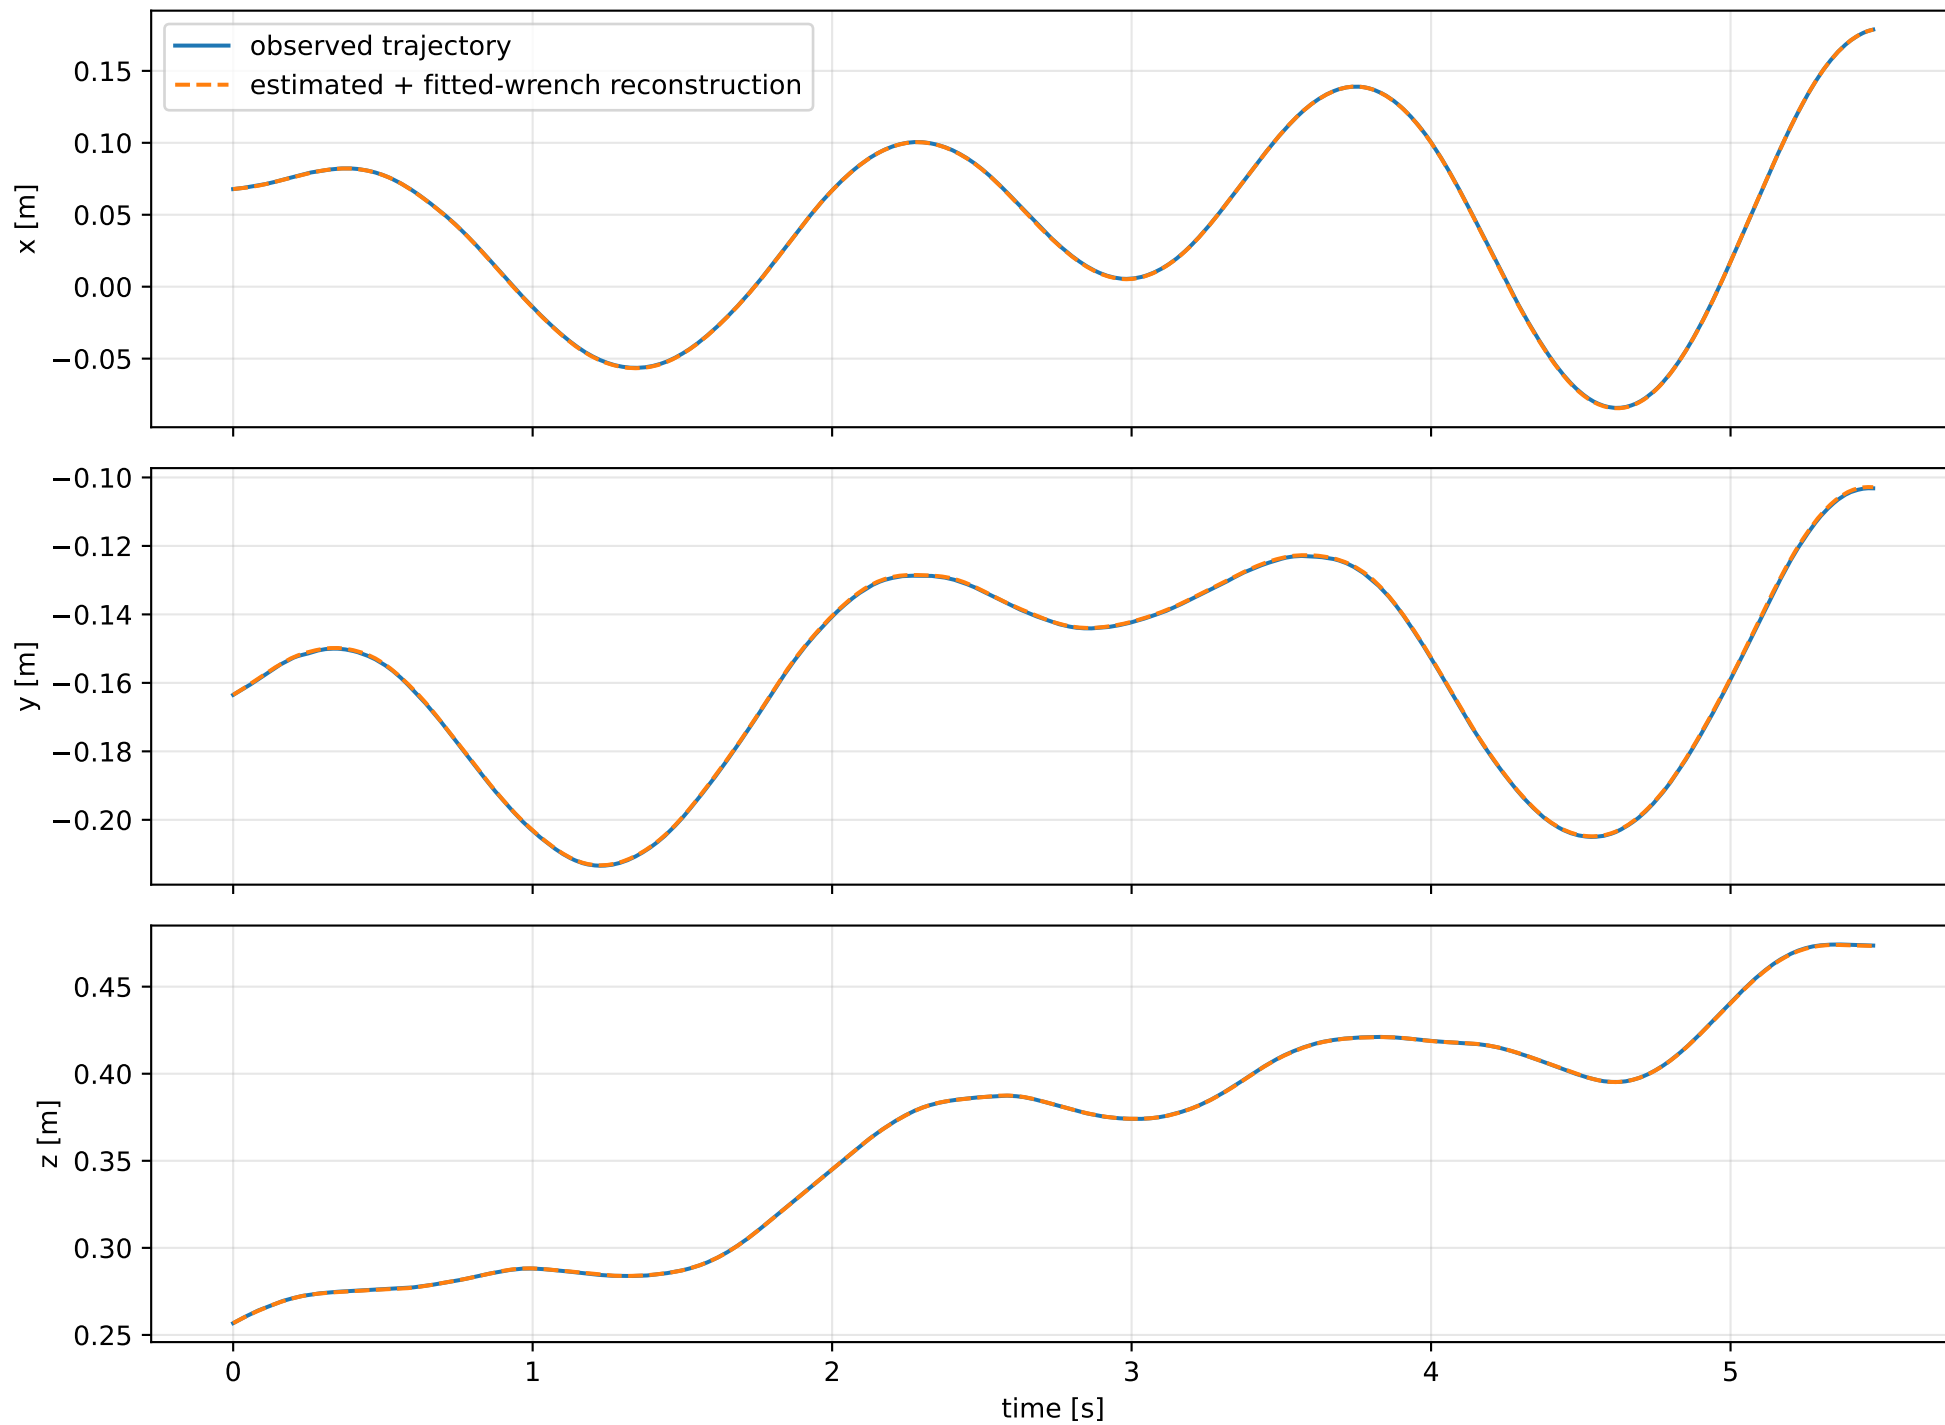


cov_full_no_position_rotation_cross: residual wrench





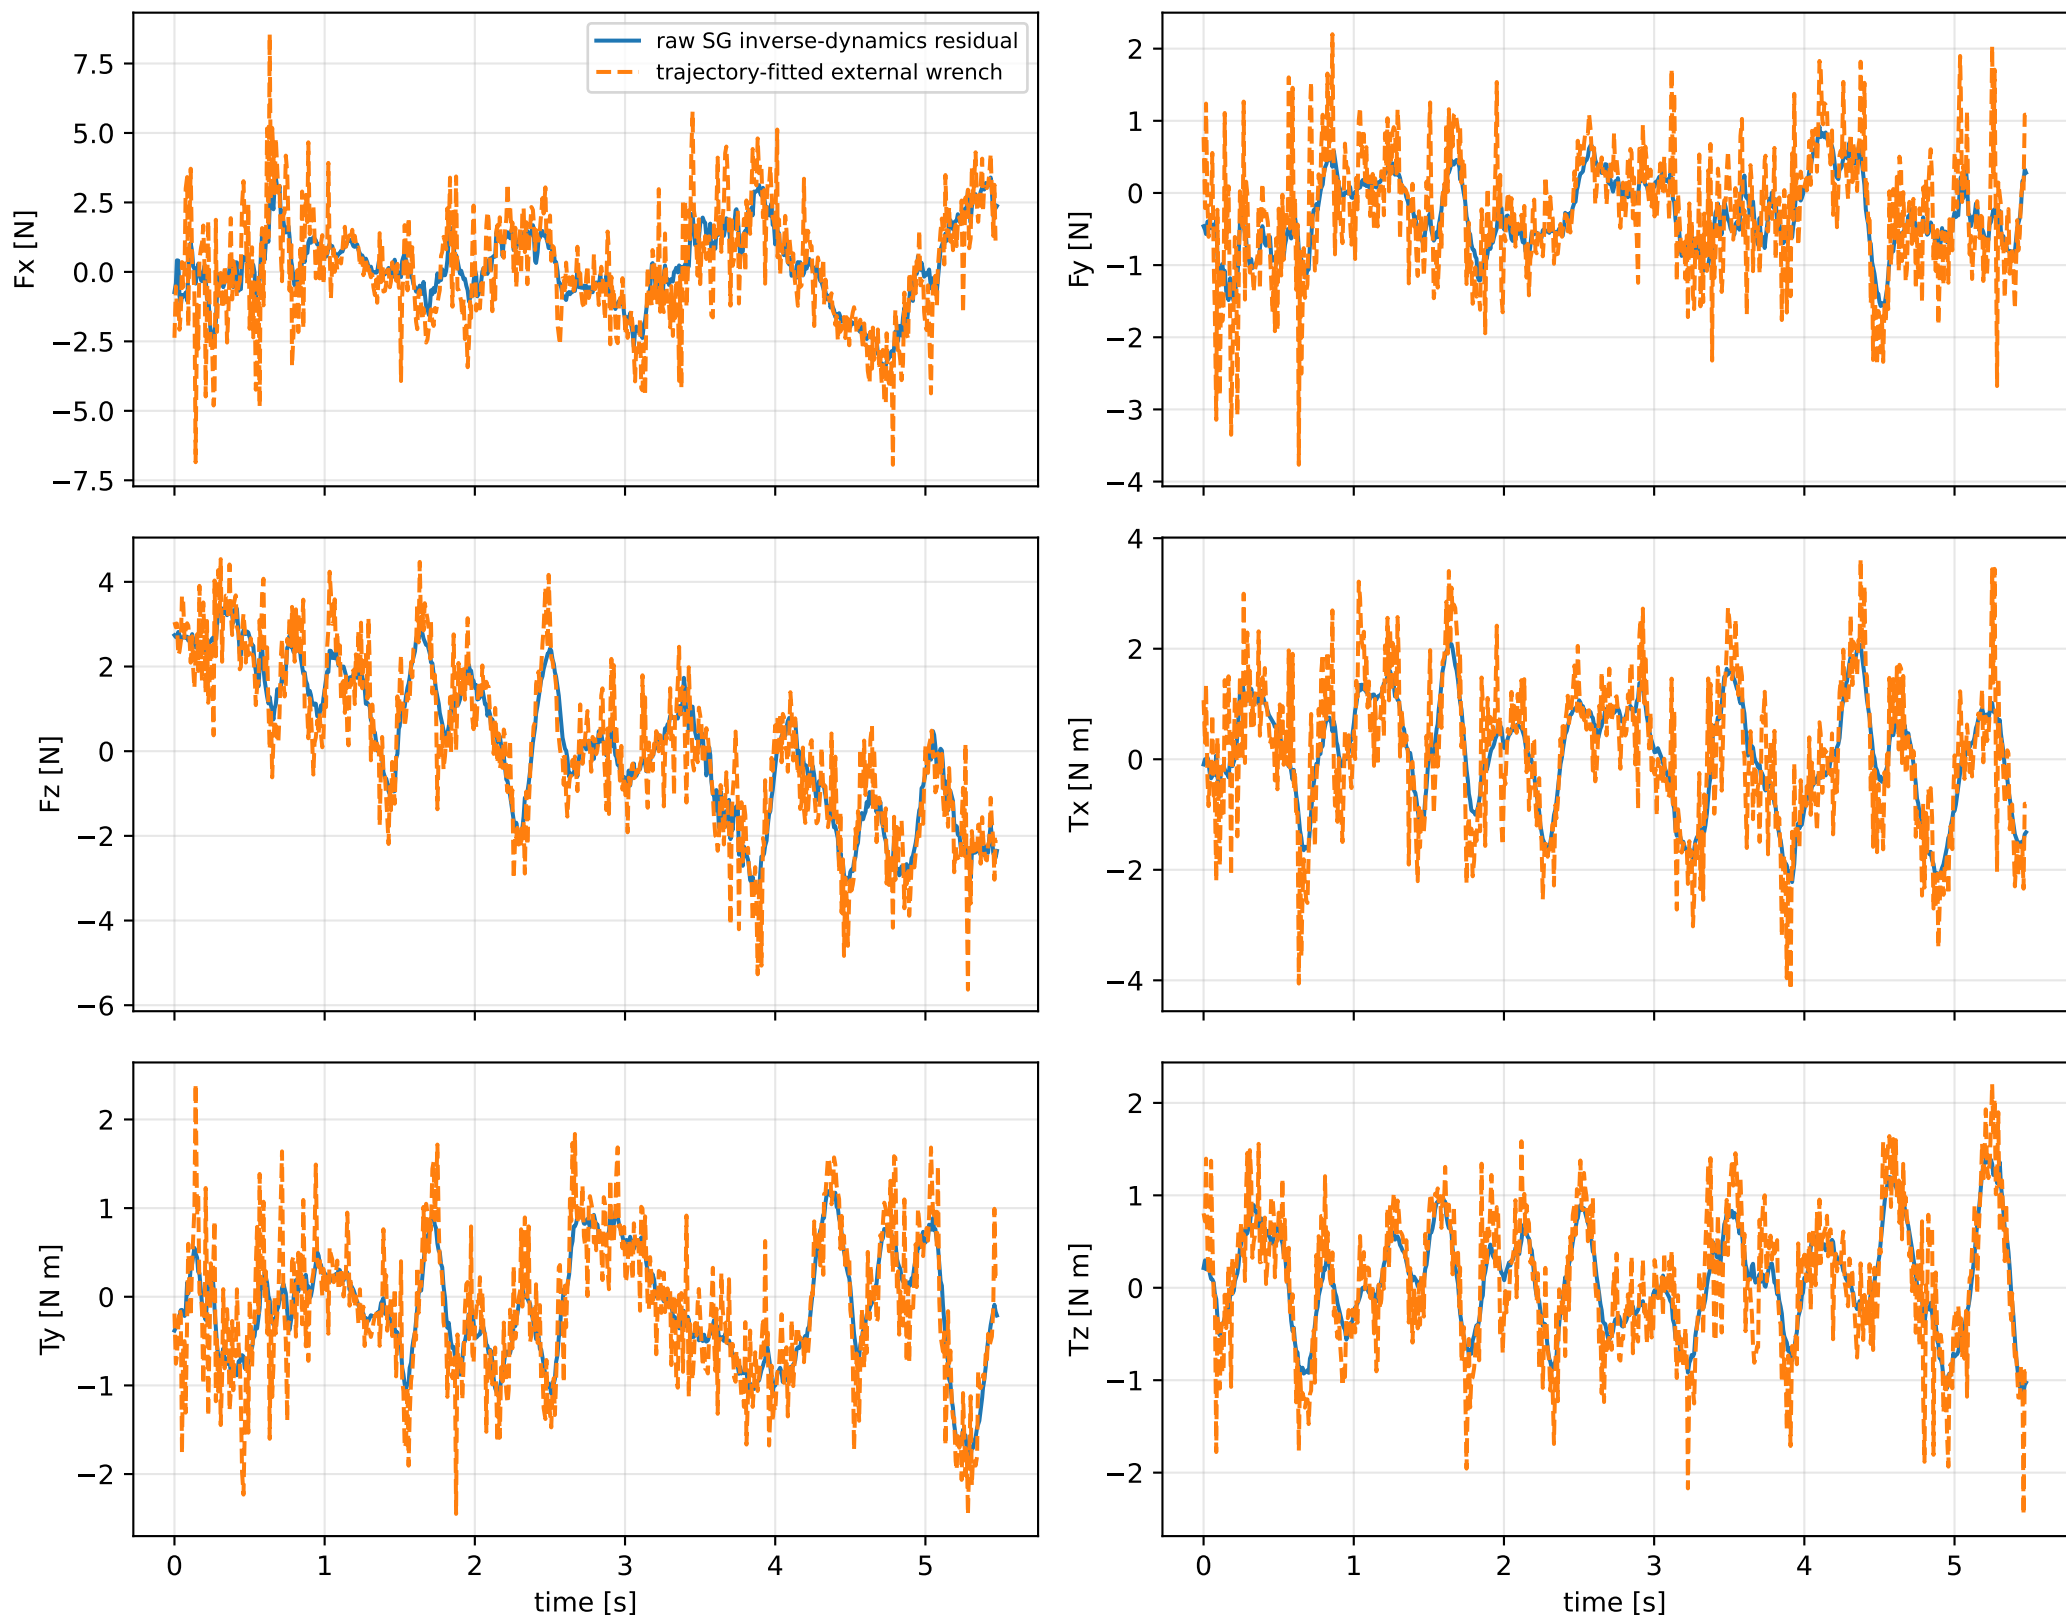


cov_full_no_position_rotation_cross: measured sensor comparison

gyro

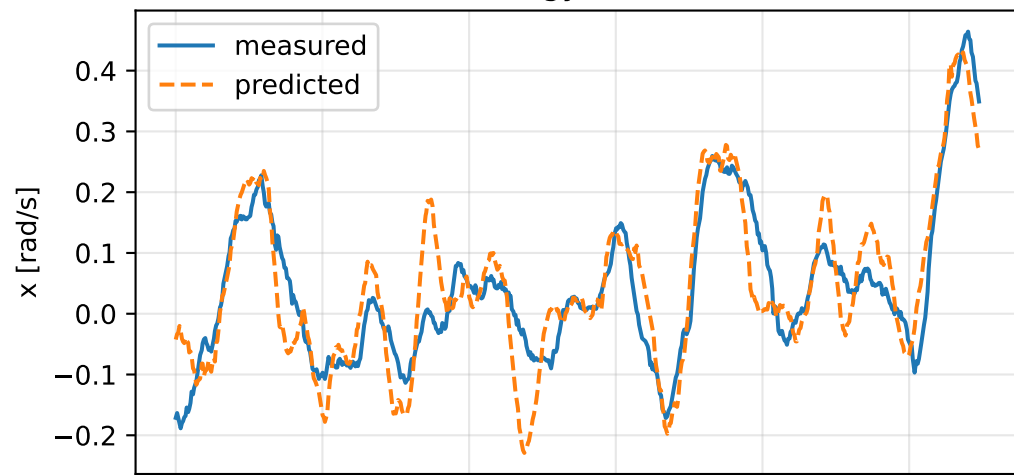

specific force

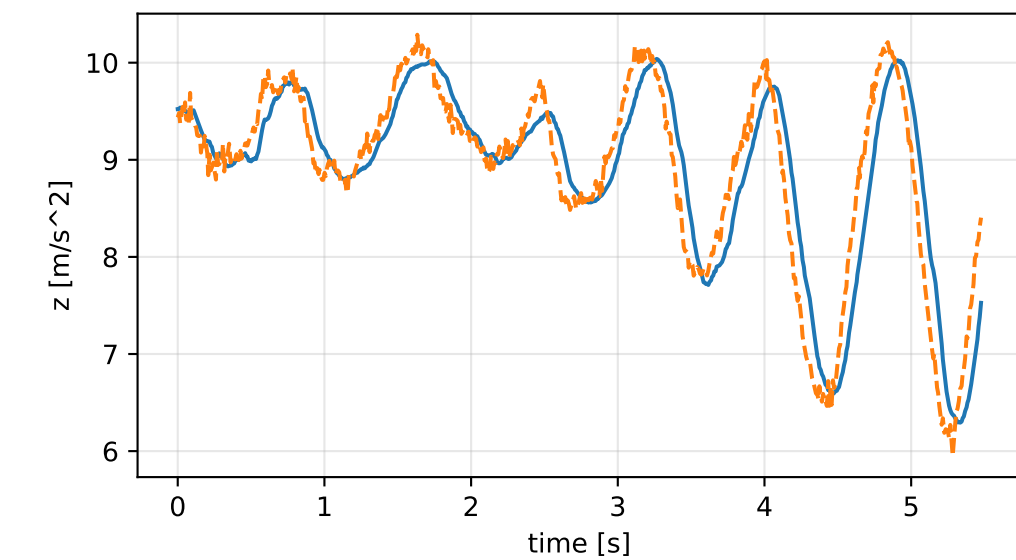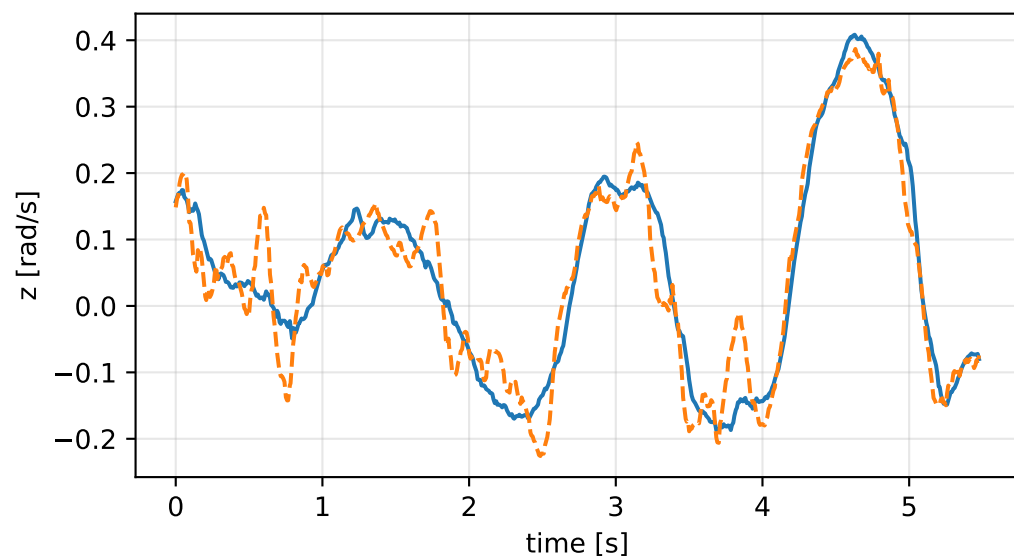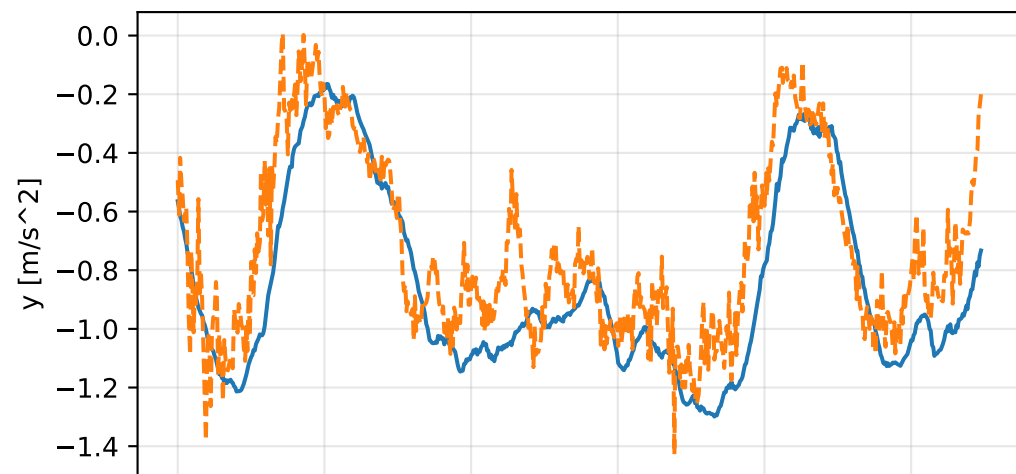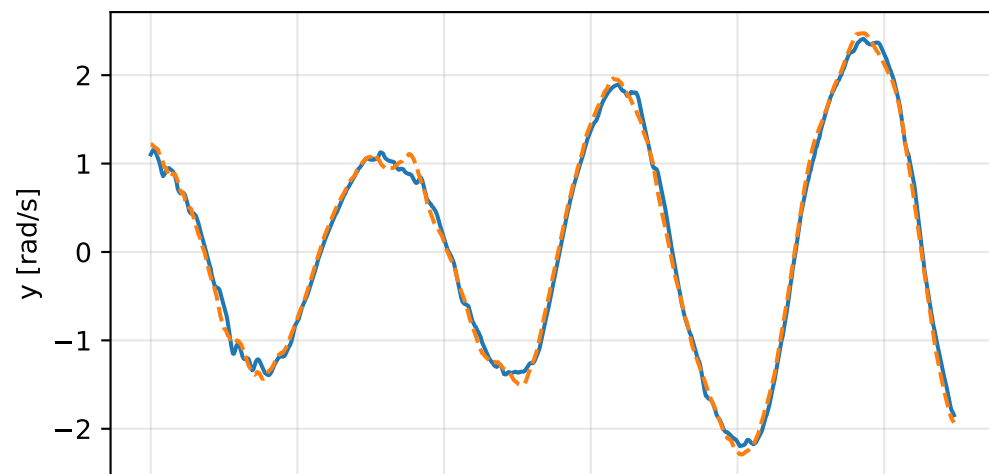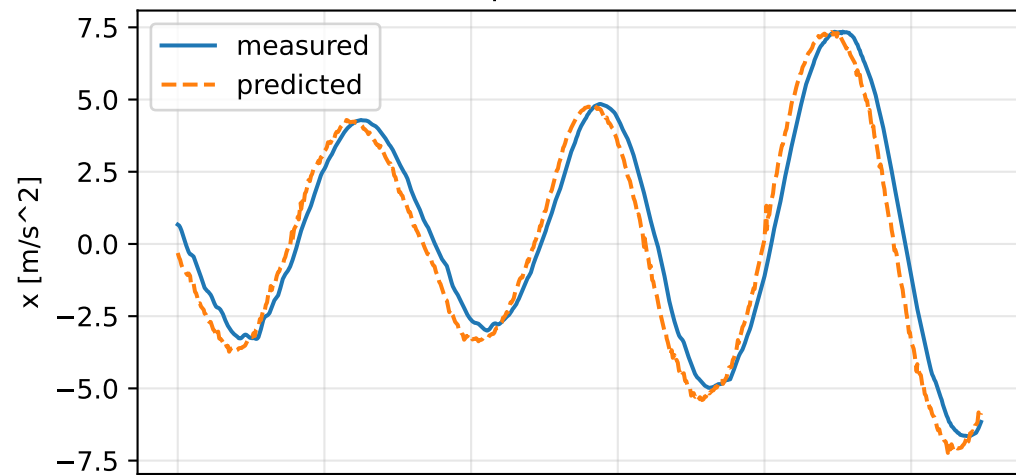

cov_full_no_position_rotation_cross: nominal -> estimated parameters

Case: cov_full_no_position_rotation_cross
status: ftol (cost tolerance satisfied)

mass [kg] nominal 2.35159759 estimated 4.26829234 delta 1.91669475

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.7163555 0.0480475 0.1456093] d=[0.6513555 0.0480483 0.1455902]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0480475 0.4335456 -0.2876384] d=[0.0480483 0.3685929 -0.2876385]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.1456093 -0.2876384 0.5245859] d=[0.1455902 -0.2876385 0.3955938]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0007947 0.1296315 -0.0504207] d=[0.00123 0.1296621]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.7749401 0.8243675 2.2994594 2.2578731] d=[-0.2250599 -0.1756325 1.2994594 1.2578731]

rotor lag [s] 0.2

gimbal lag [s] 0.0509350249