



kkt_off_scale_positive: trajectory

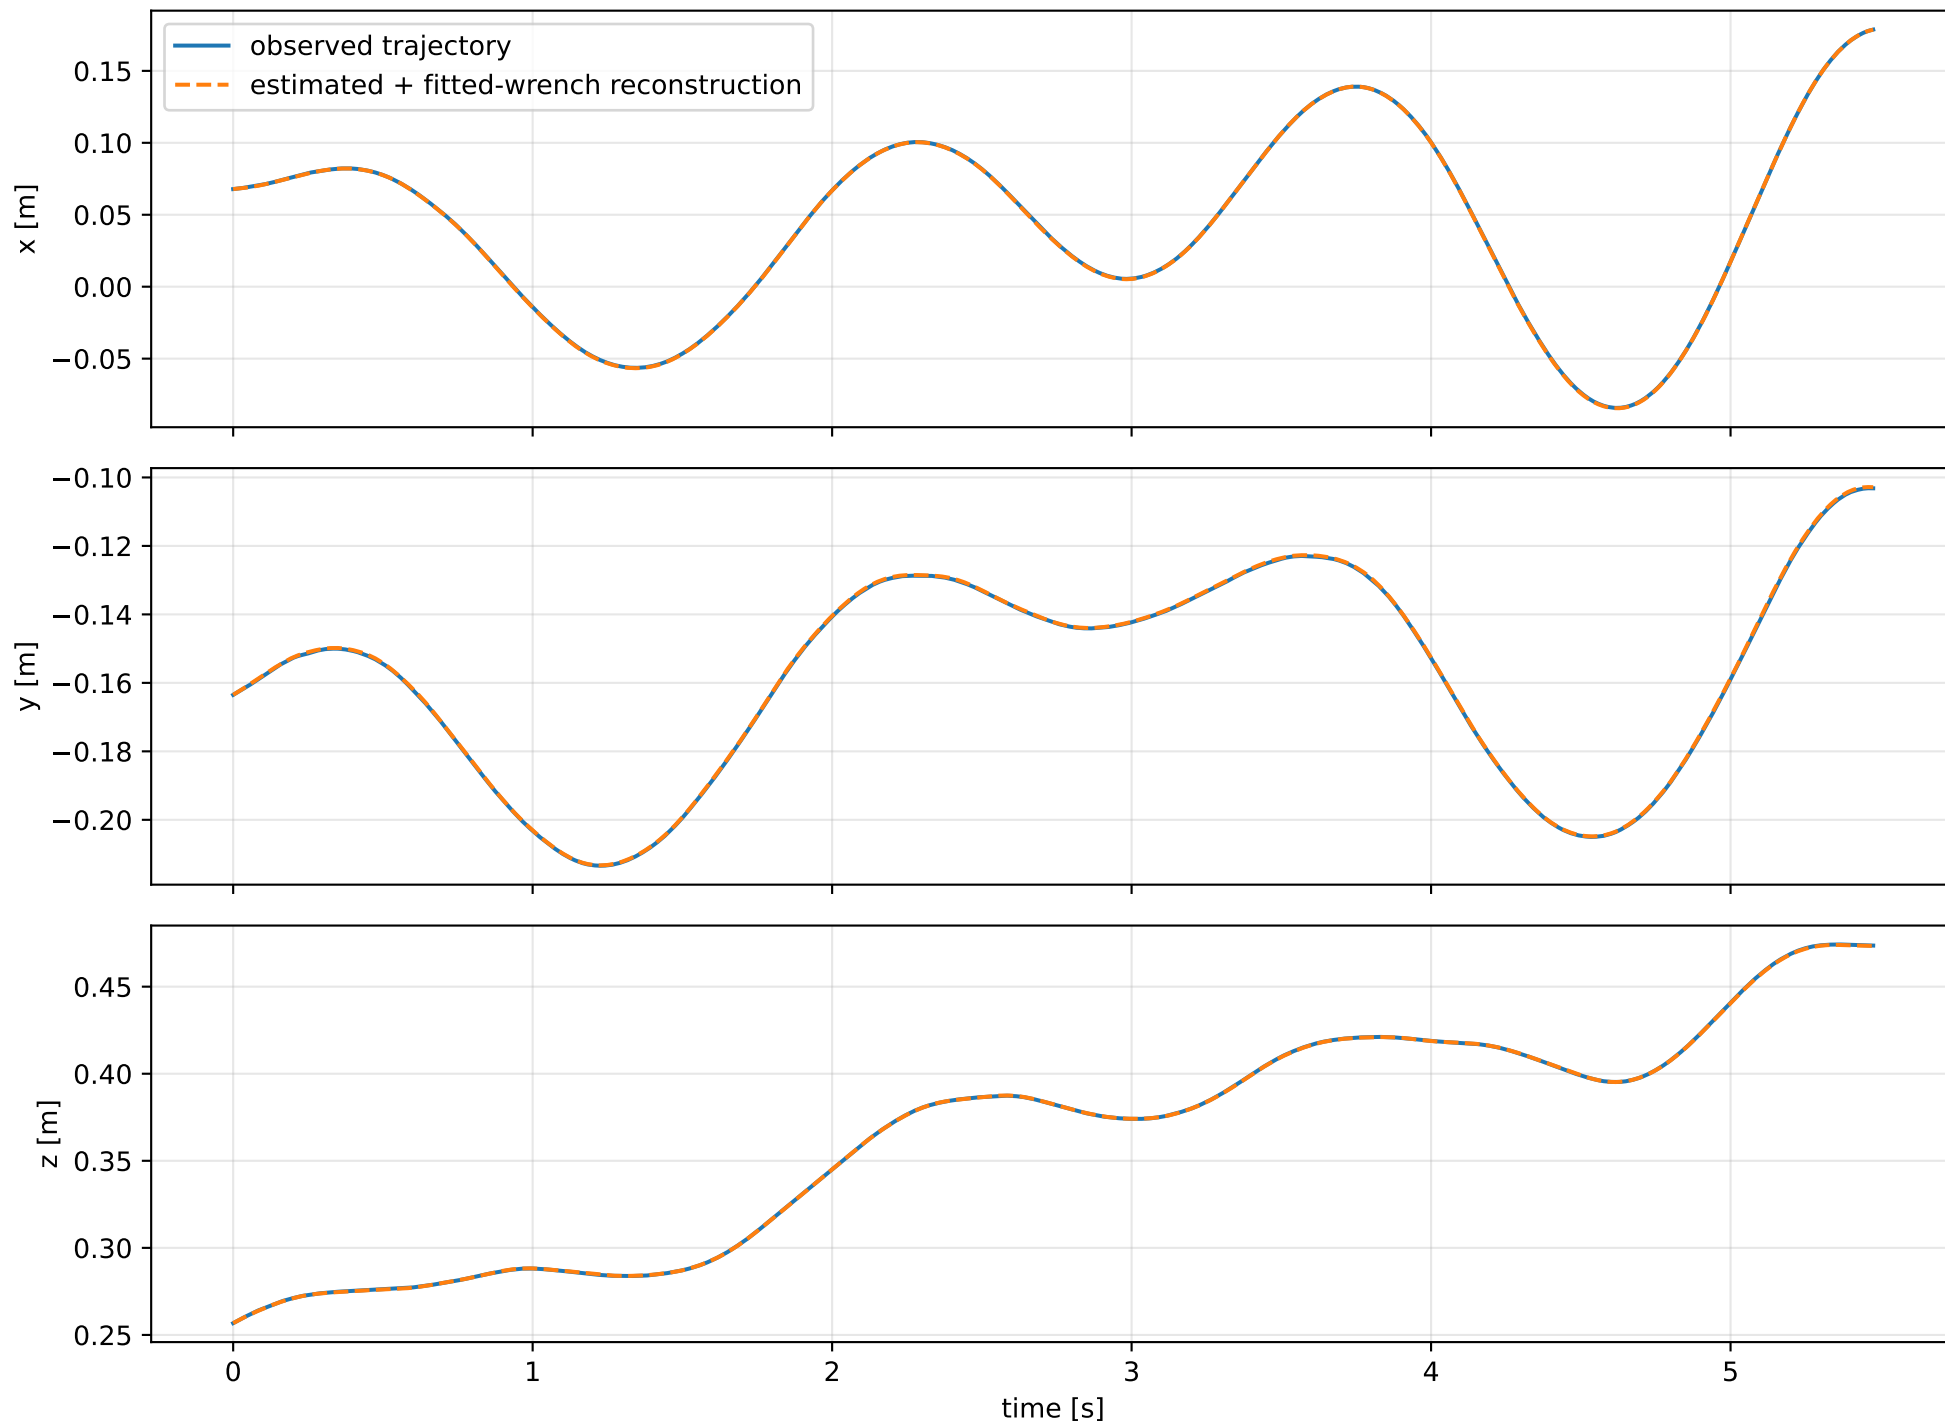


kkt_off_scale_positive: residual wrench

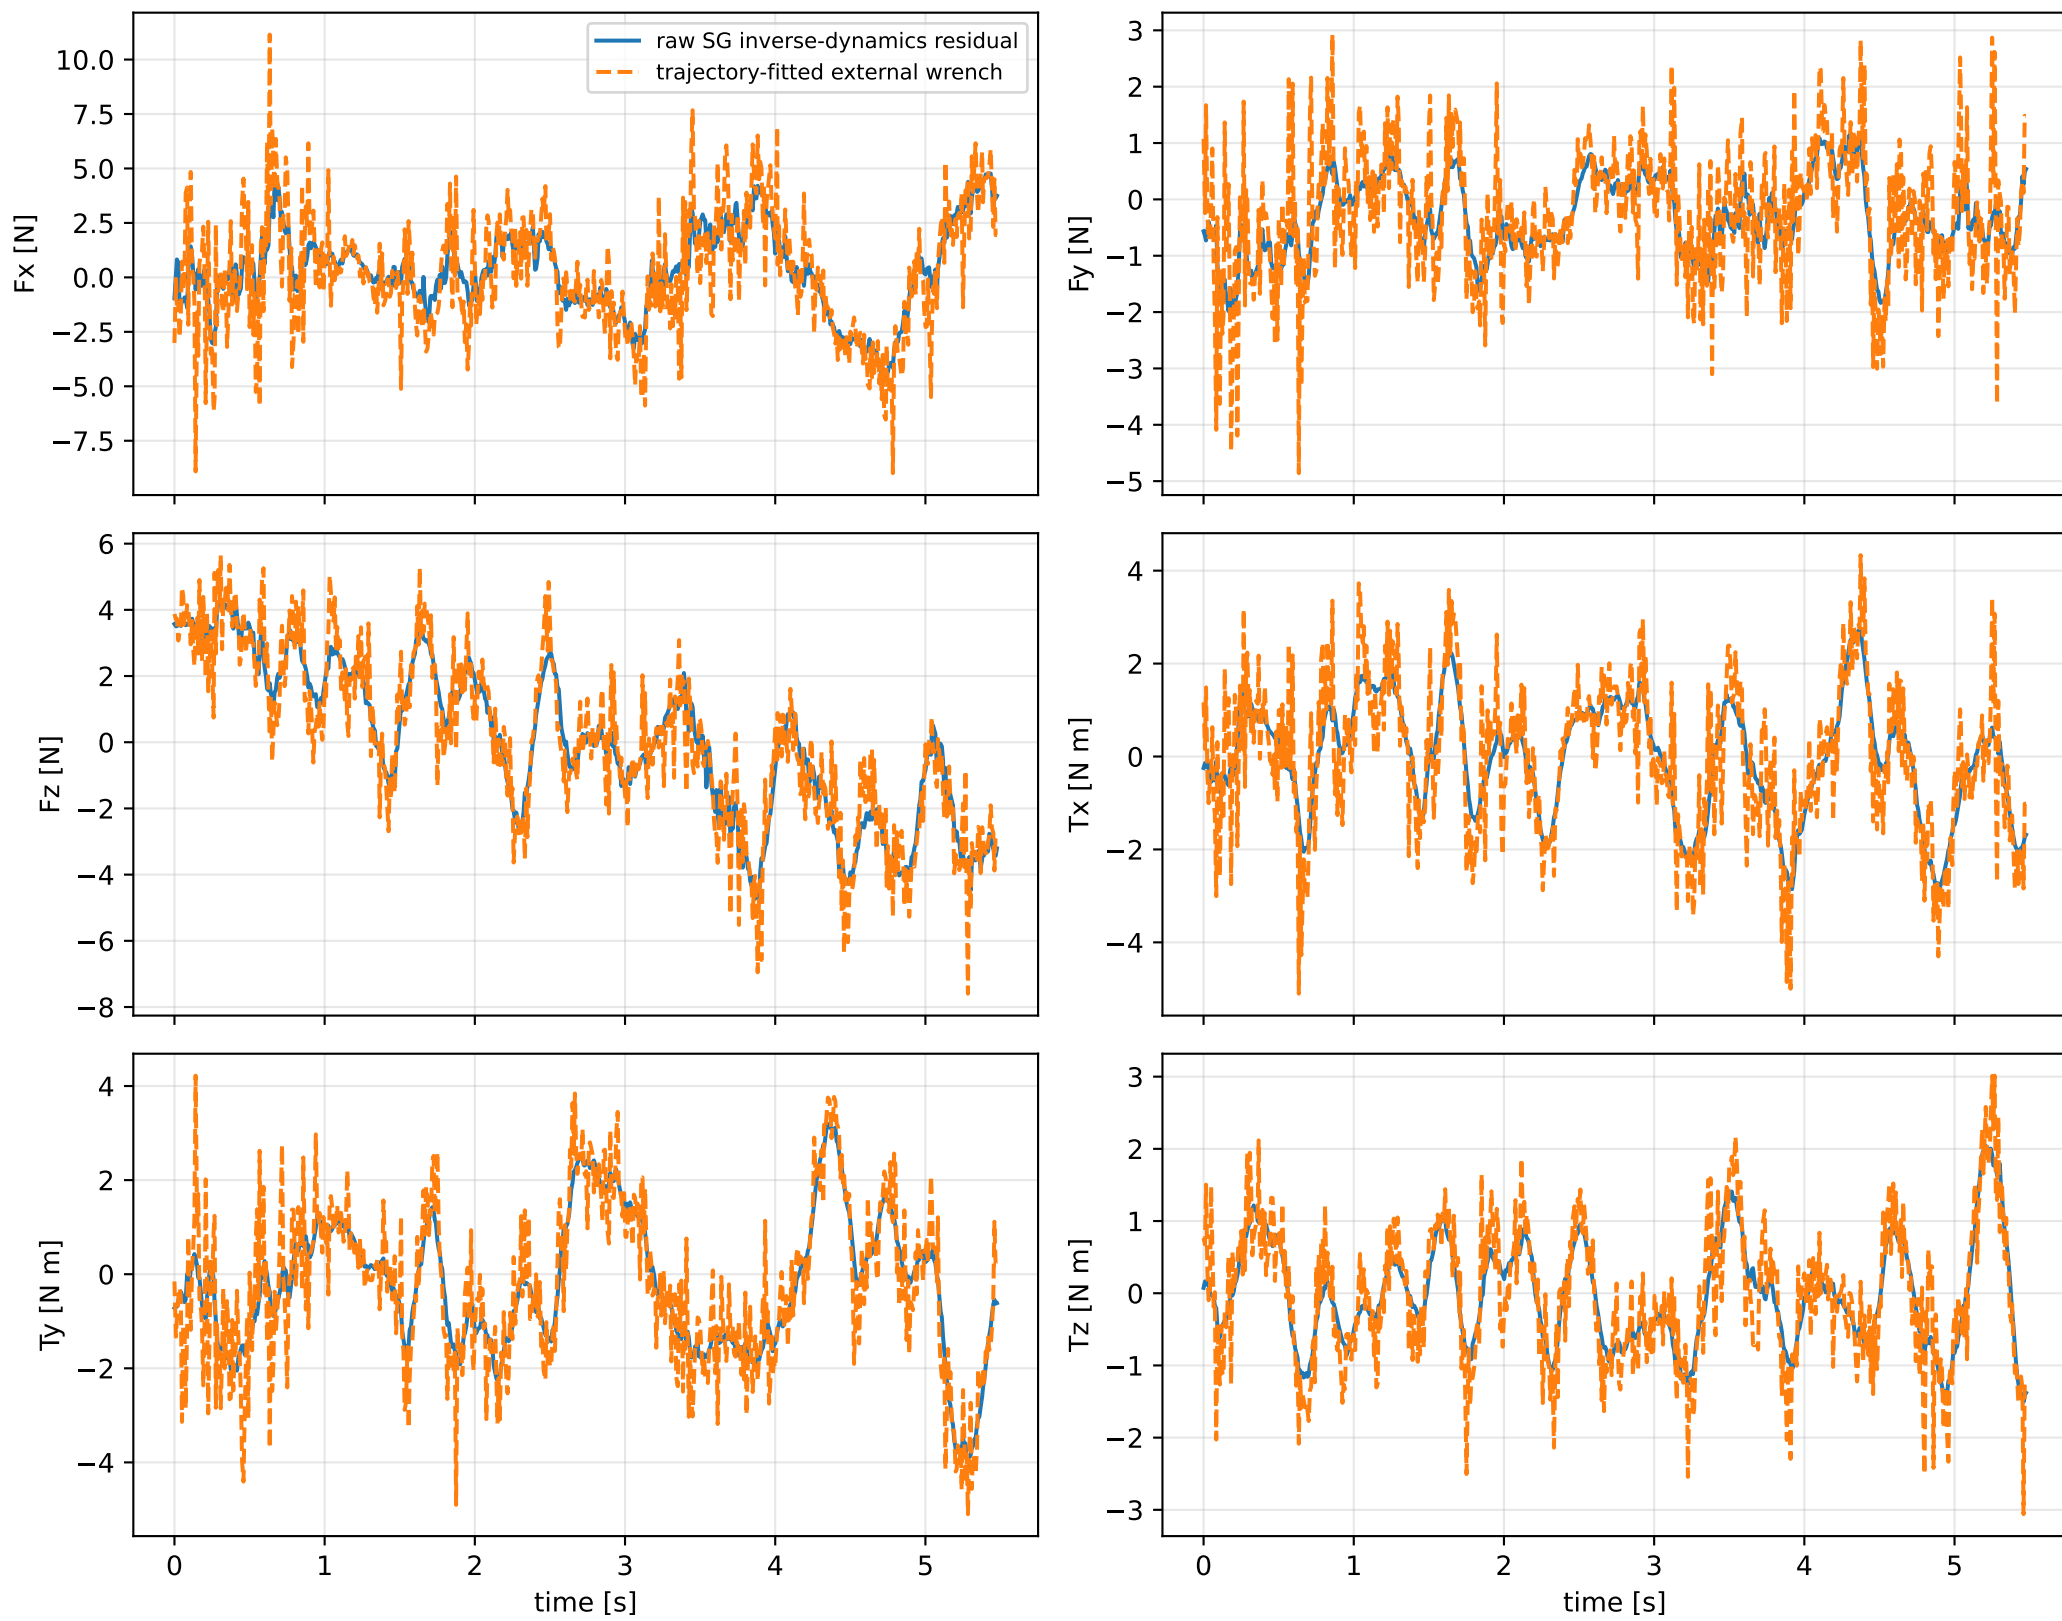


kkt_off_scale_positive: measured sensor comparison

gyro

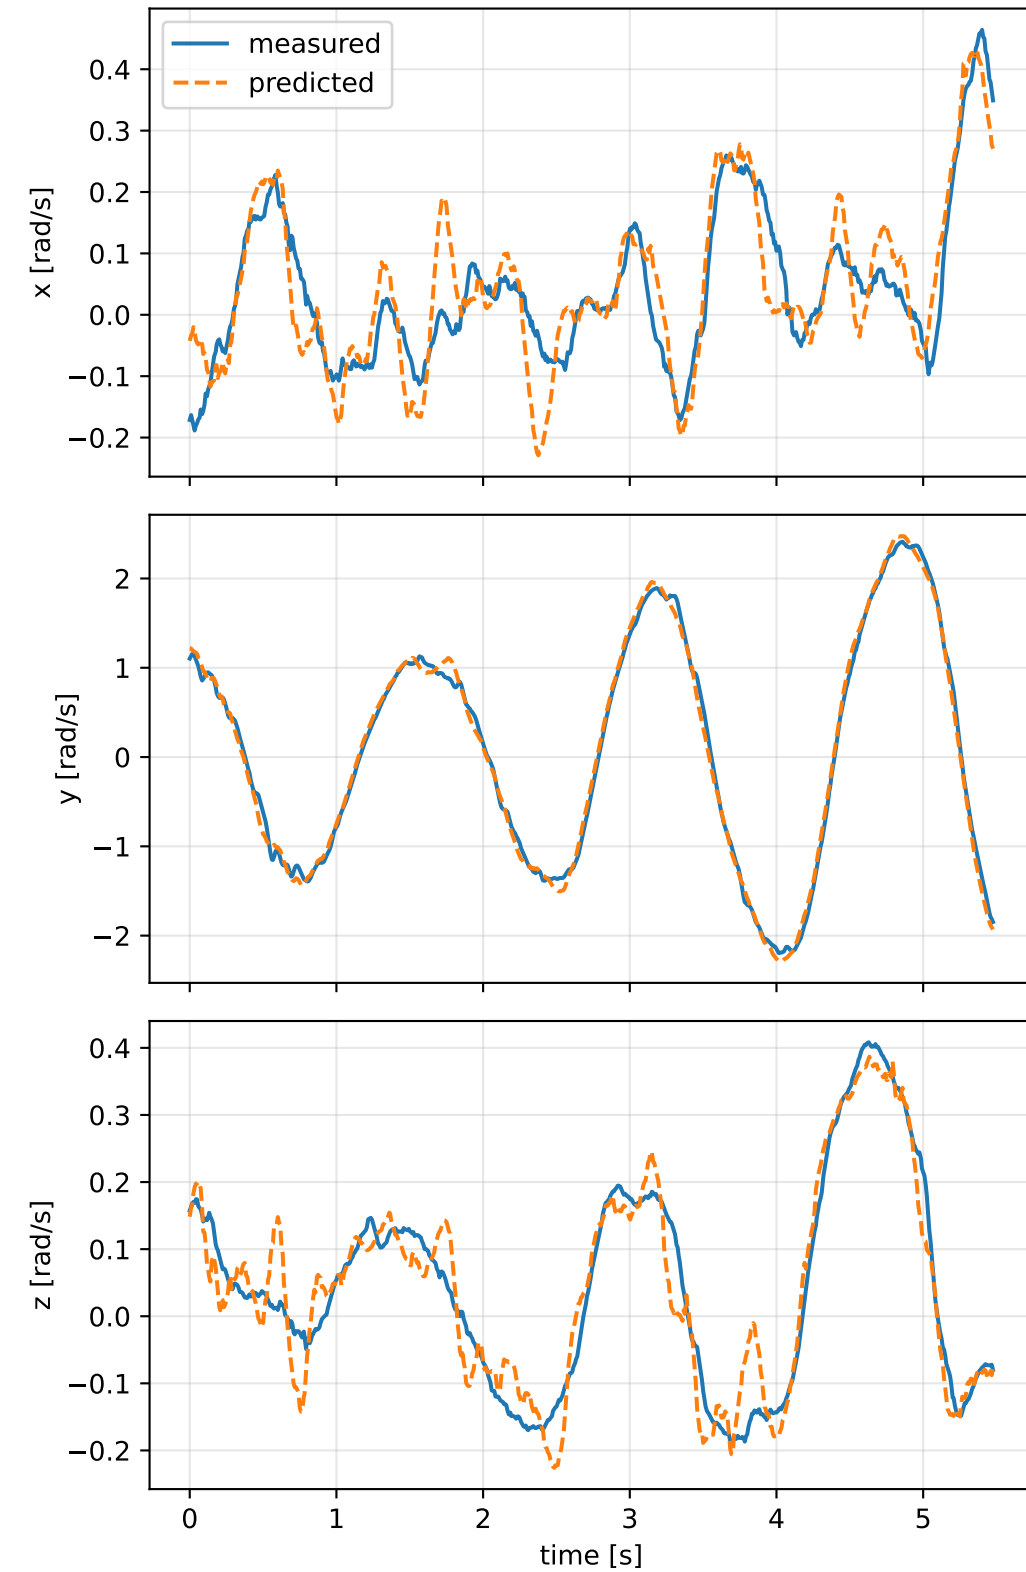

specific force

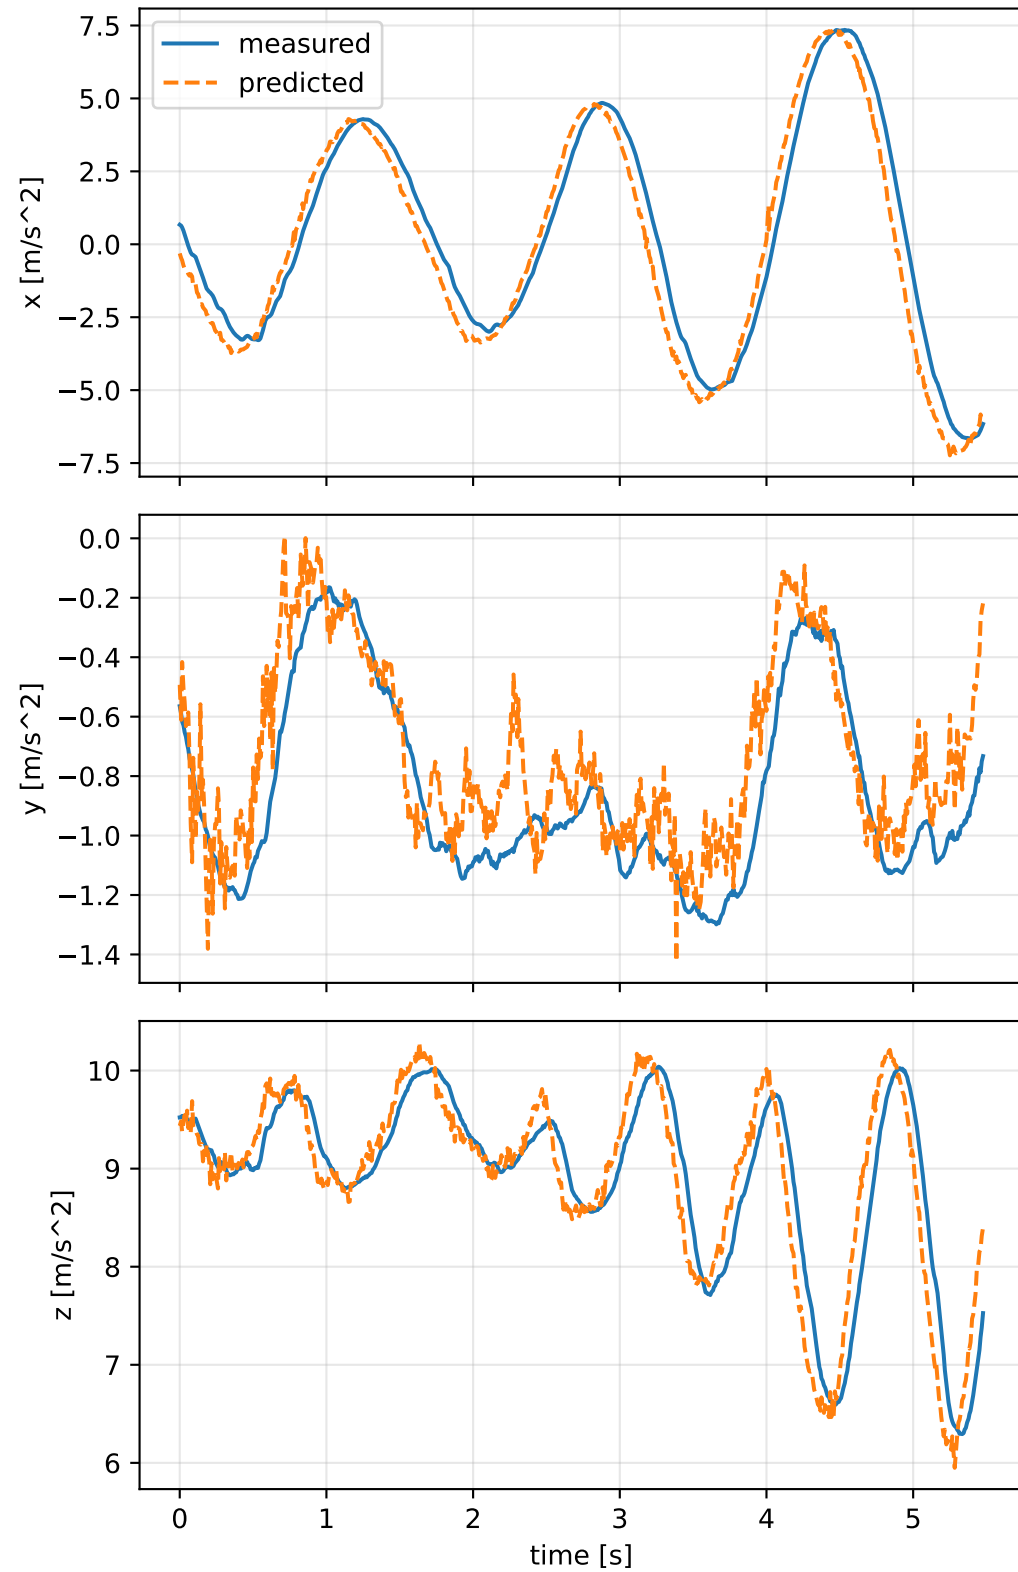

kkt_off_scale_positive: nominal -> estimated parameters

Case: kkt_off_scale_positive

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 5.83870707 delta 3.48710948

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.765281 0.0859236 0.2393217] d=[0.700281 0.0859244 0.2393027]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0859236 0.7406222 -0.3384278] d=[0.0859244 0.6756695 -0.3384278]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.2393217 -0.3384278 0.5570455] d=[0.2393027 -0.3384278 0.4280534]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0102782 0.1034156 -0.0547338] d=[-0.0082535 0.1034462]

rotor force effectiveness

[1. 1. 1. 1.] -> [1.3770605 1.2694765 2.8601544 2.9563748] d=[0.3770605 0.2694765 1.8601544 1.9563748]

rotor lag [s] 0.199999999

gimbal lag [s] 0.0487666303