

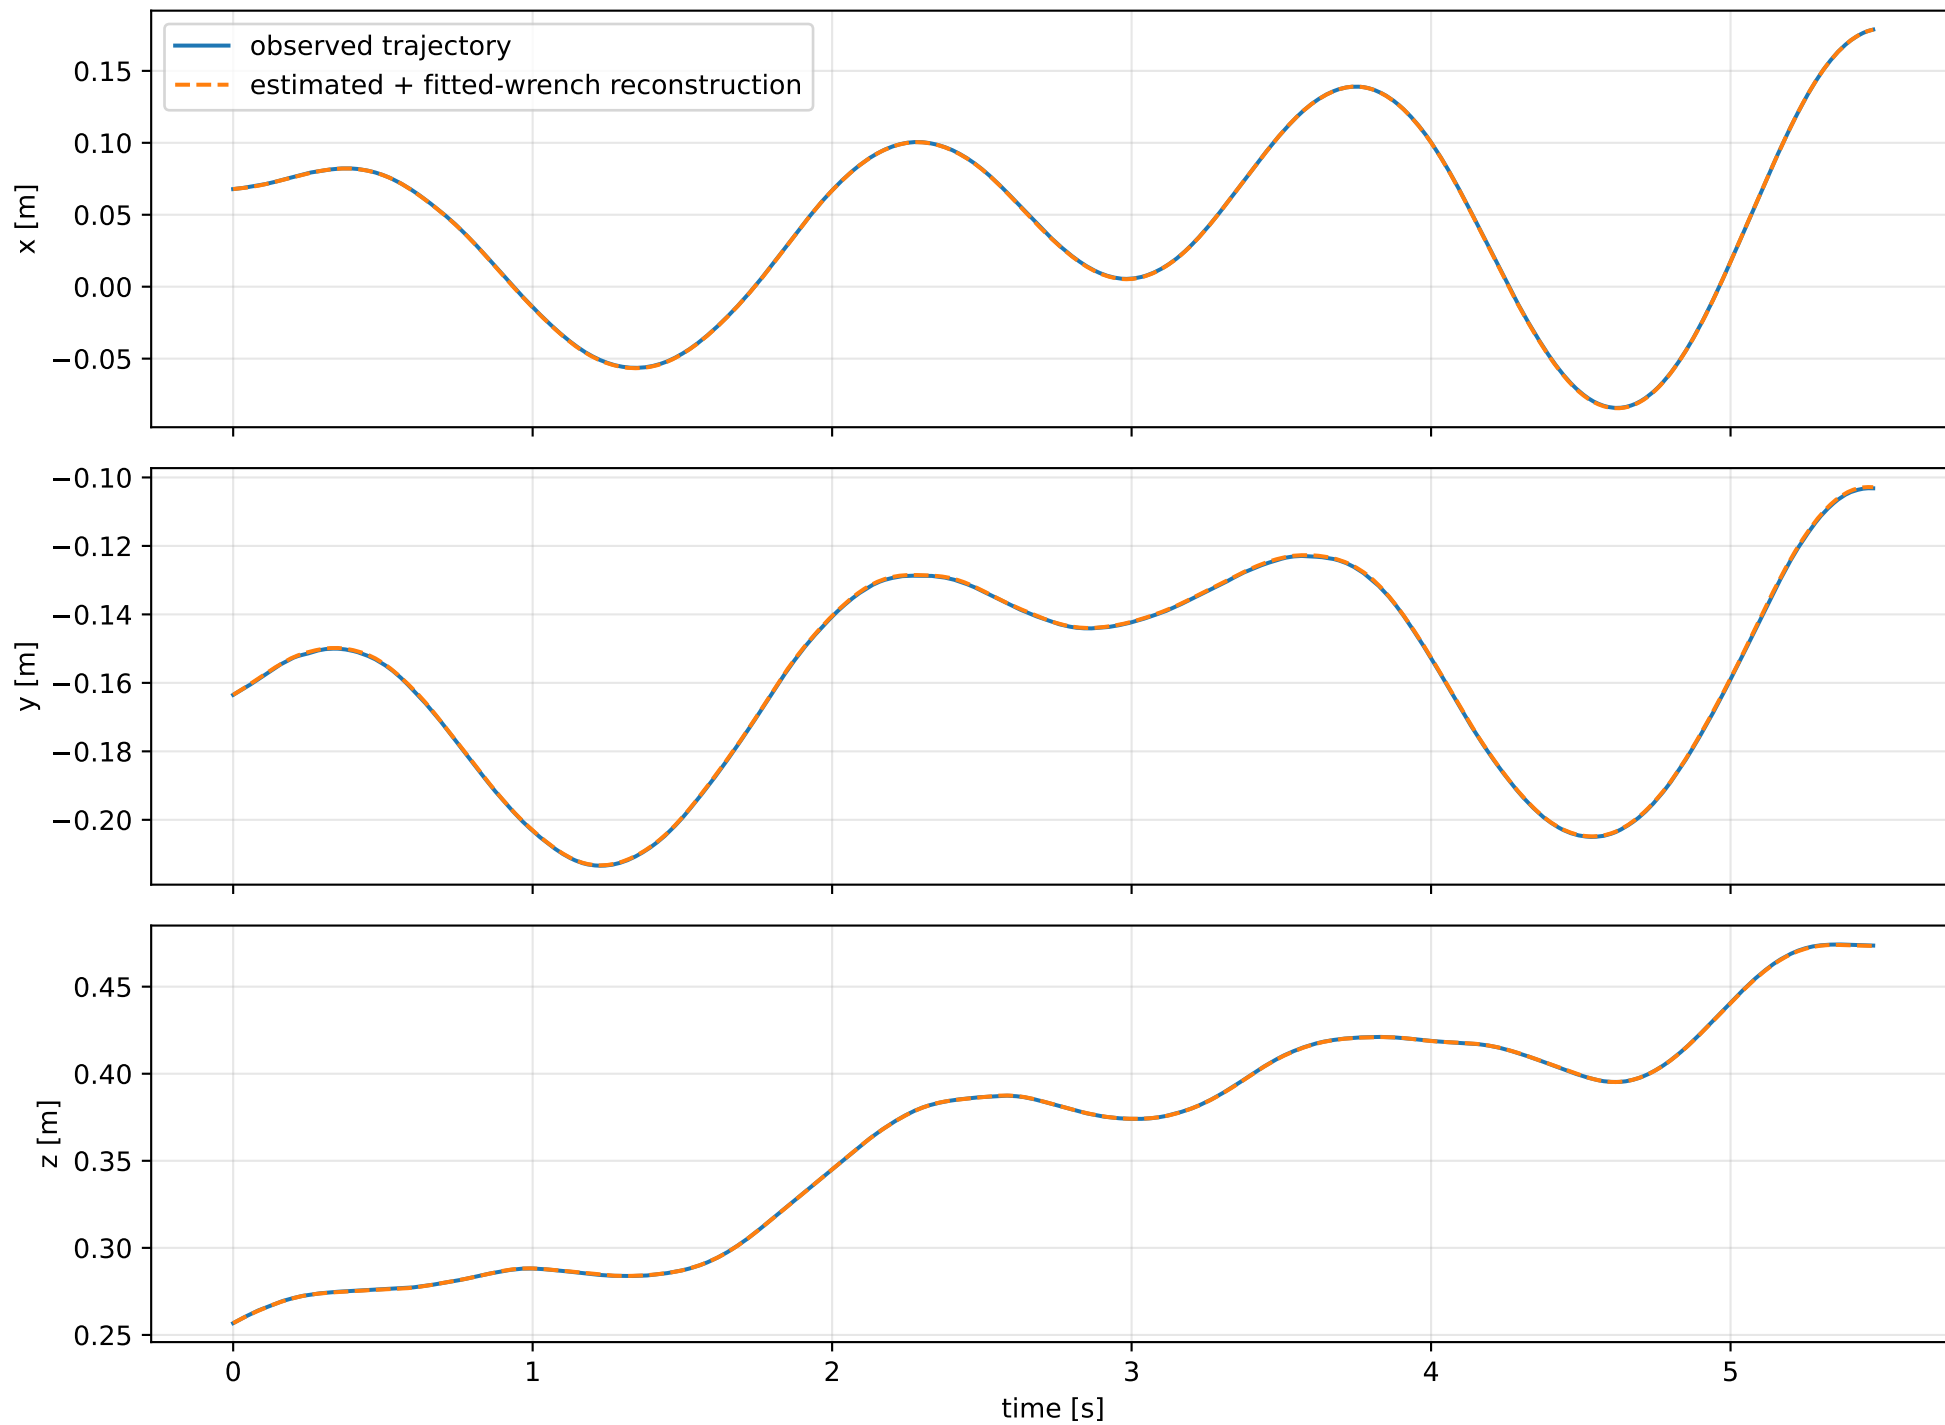
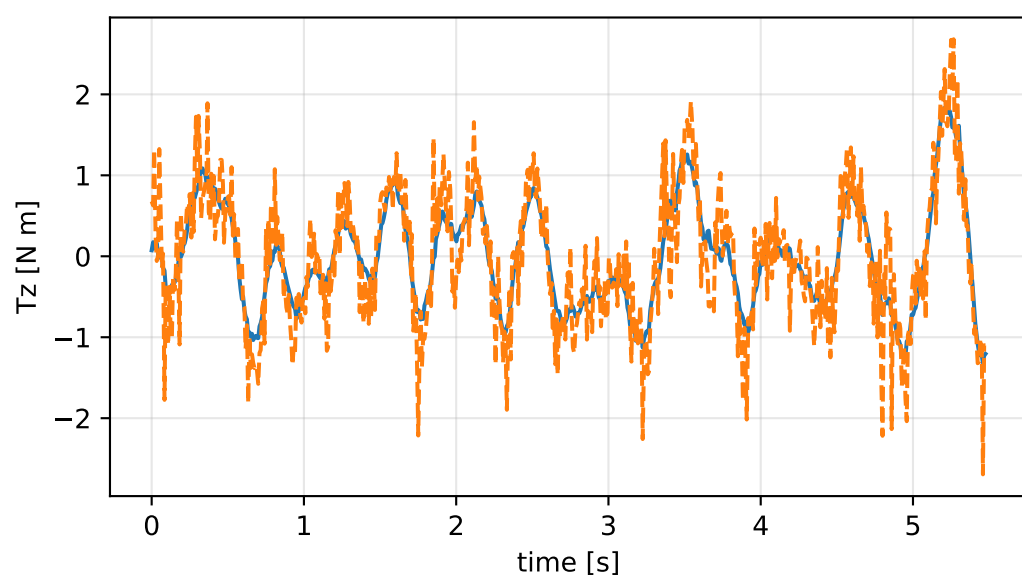
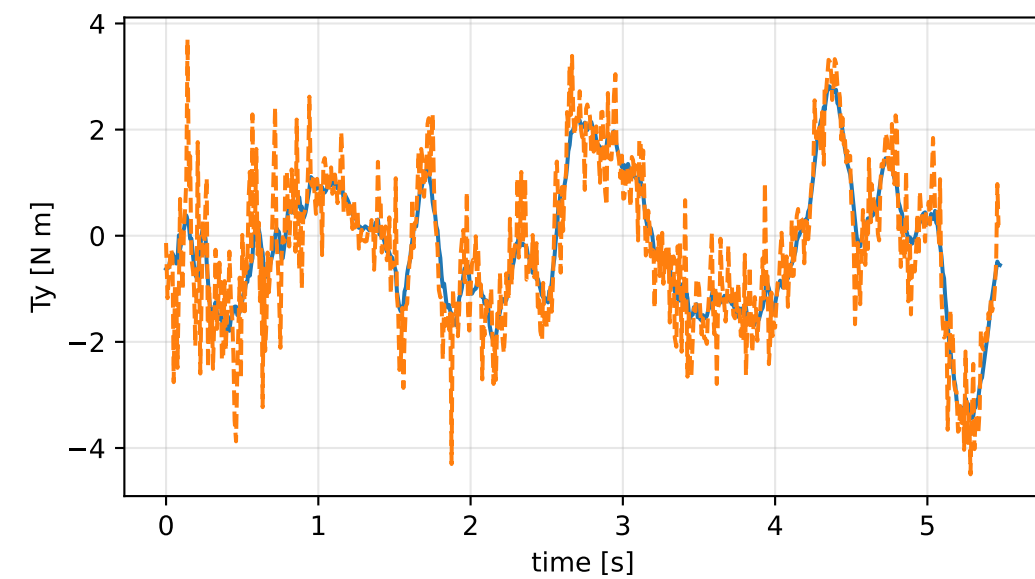
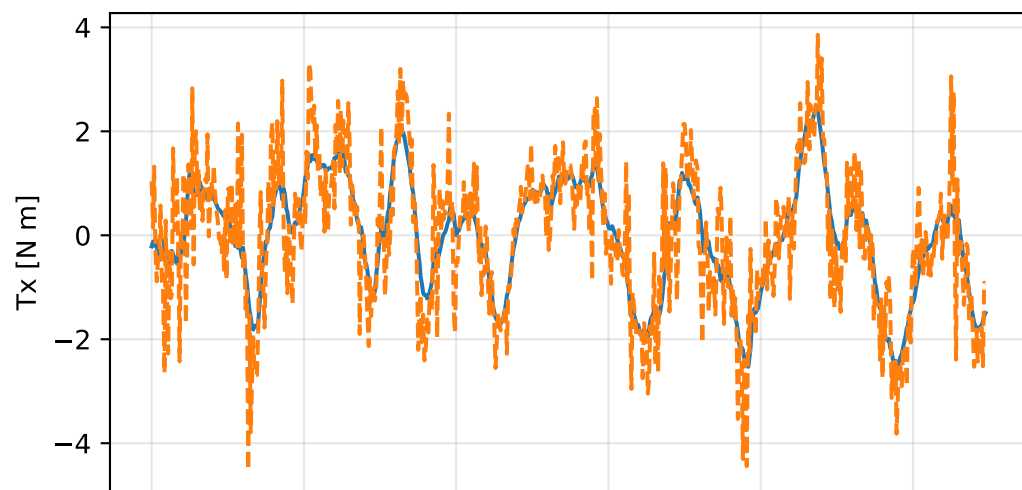
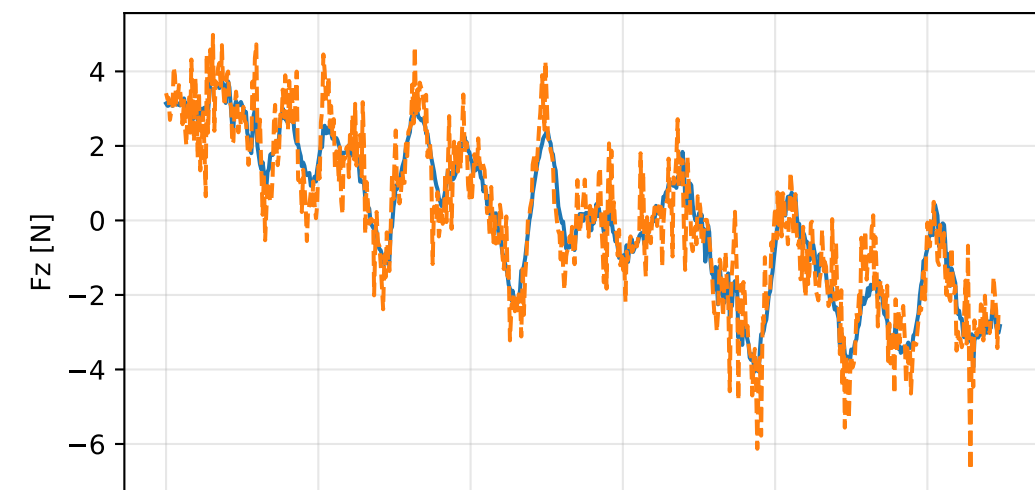


lag_split_strict_only: trajectory

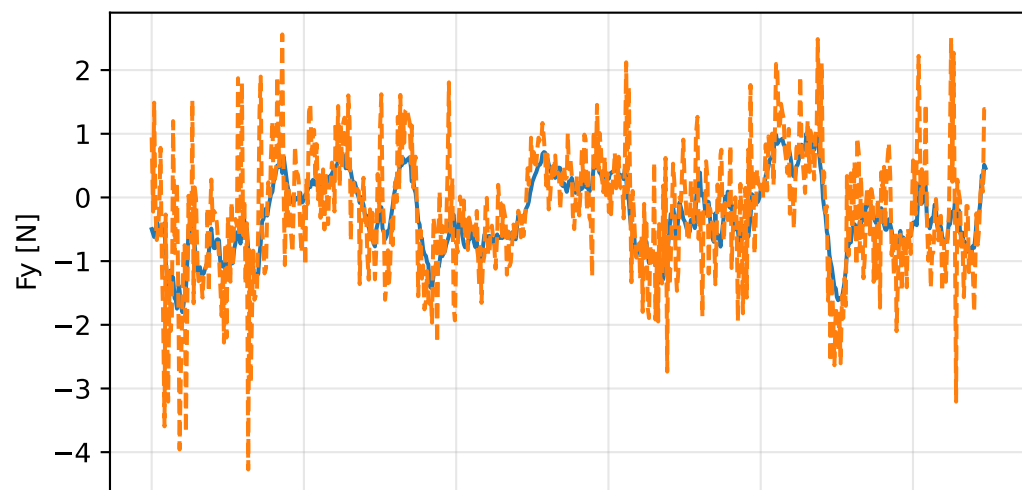


lag_split_strict_only: residual wrench

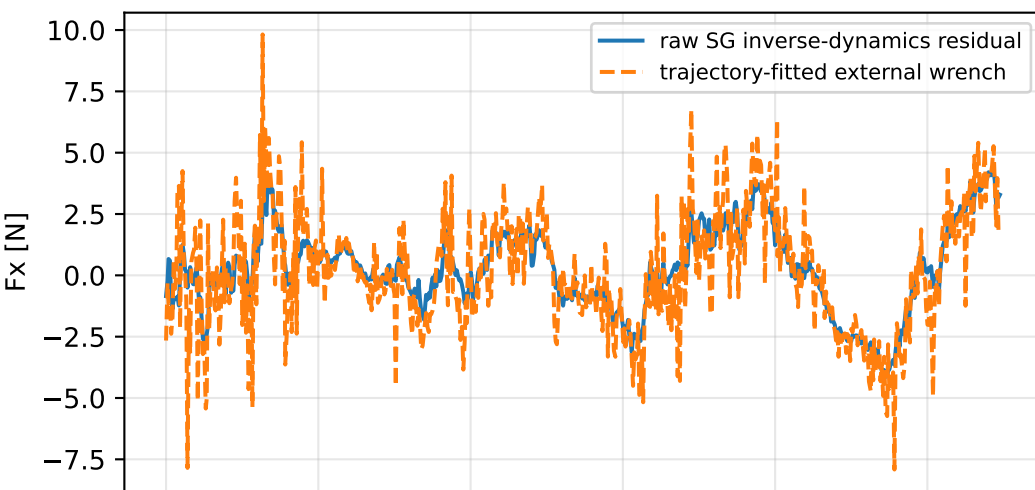


lag_split_strict_only: measured sensor comparison

gyro

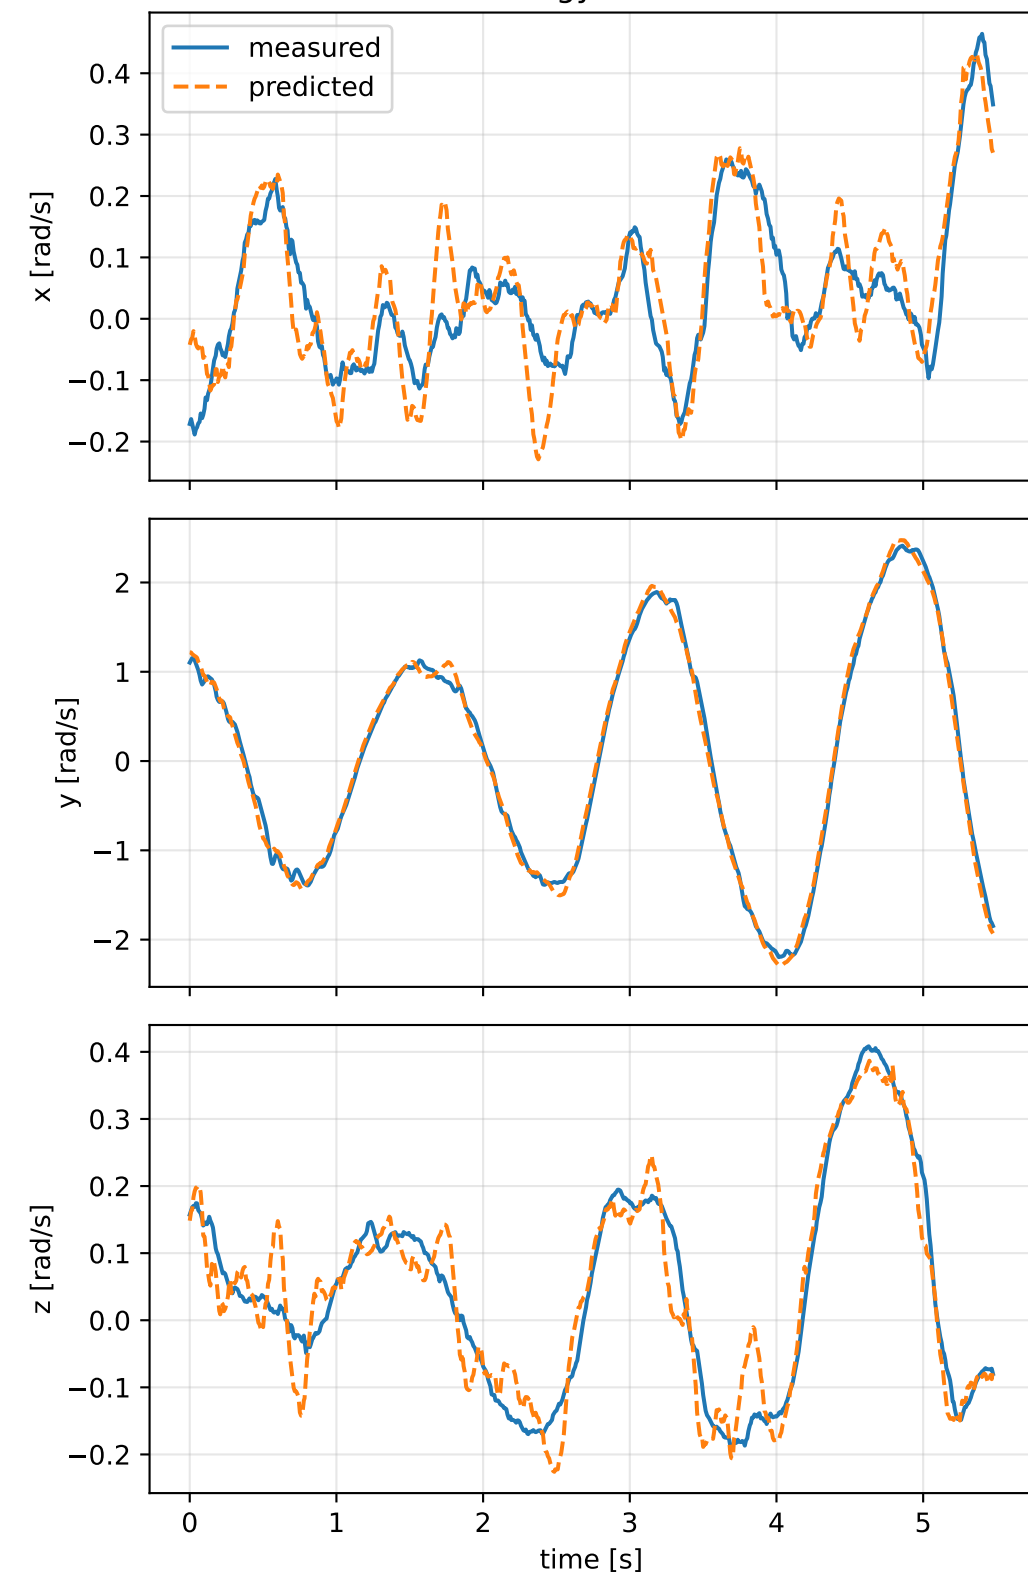

specific force

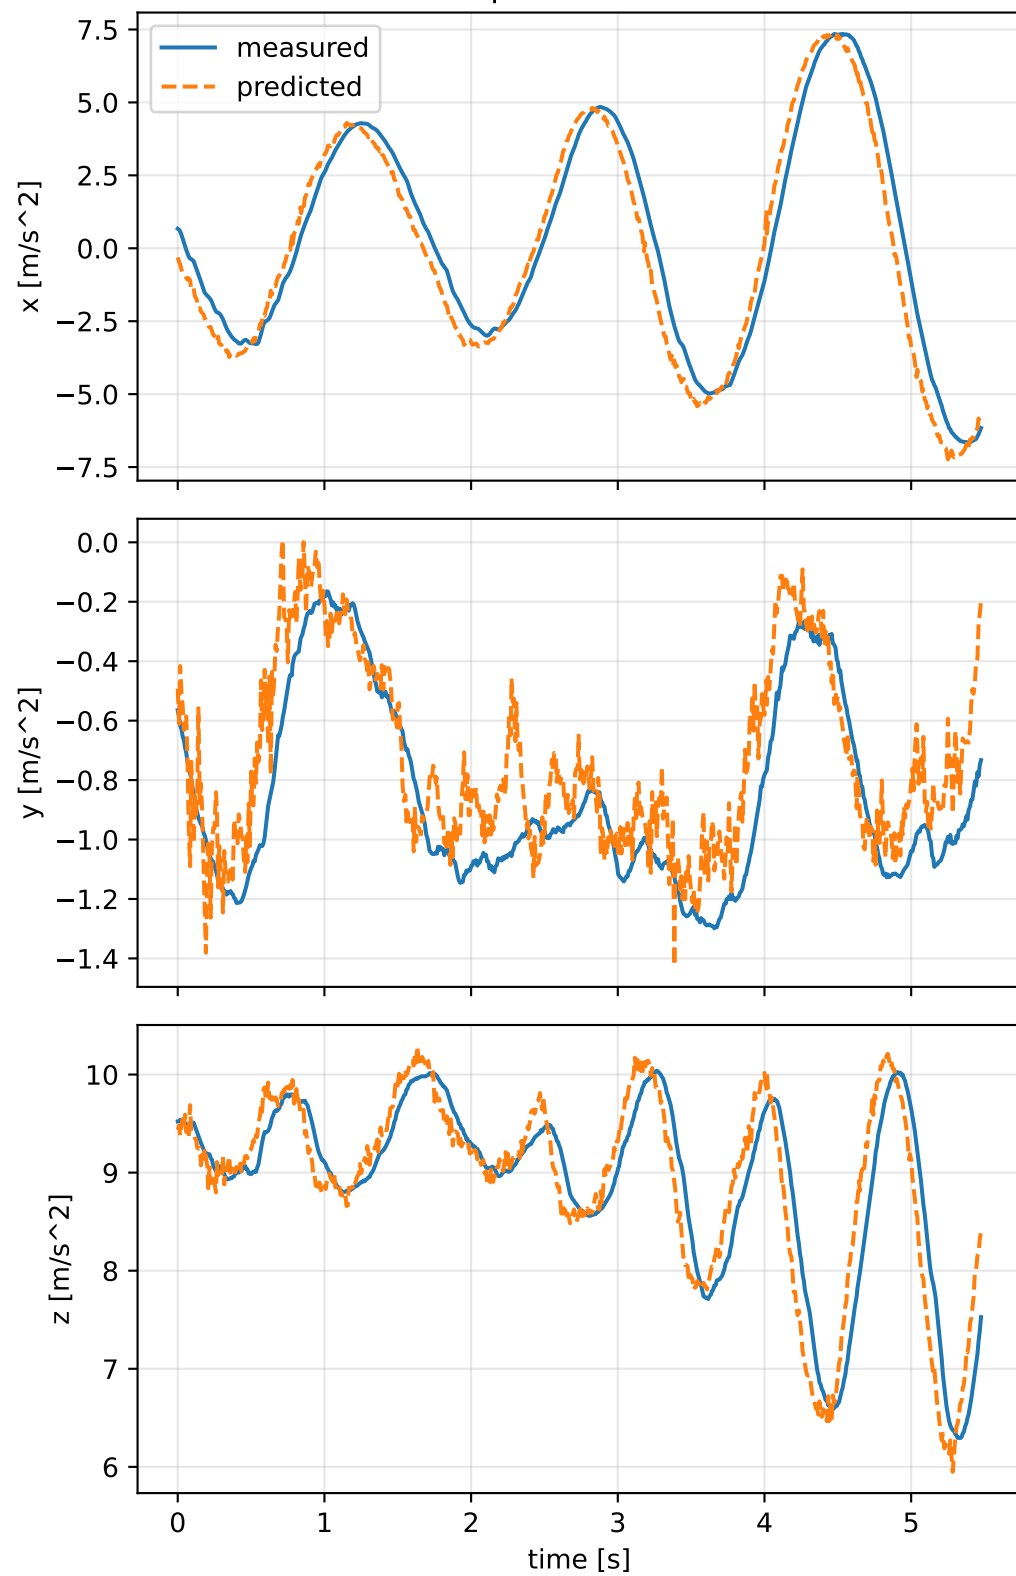

lag_split_strict_only: nominal -> estimated parameters

Case: lag_split_strict_only

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 5.13927955 delta 2.78768196

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.6813001 0.0758016 0.2094841] d=[0.6163 0.0758023 0.2094651]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0758016 0.6517281 -0.3020548] d=[0.0758023 0.5867754 -0.3020548]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.2094841 -0.3020548 0.4928325] d=[0.2094651 -0.3020548 0.3638404]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0103088 0.1043515 -0.054387] d=[-0.0082841 0.1043821]

rotor force effectiveness

[1. 1. 1. 1.] -> [1.206287 1.1113728 2.5242018 2.6071025] d=[0.206287 0.1113728 1.5242018 1.6071025]

rotor lag [s] 0.2

gimbal lag [s] 0.0499868393