

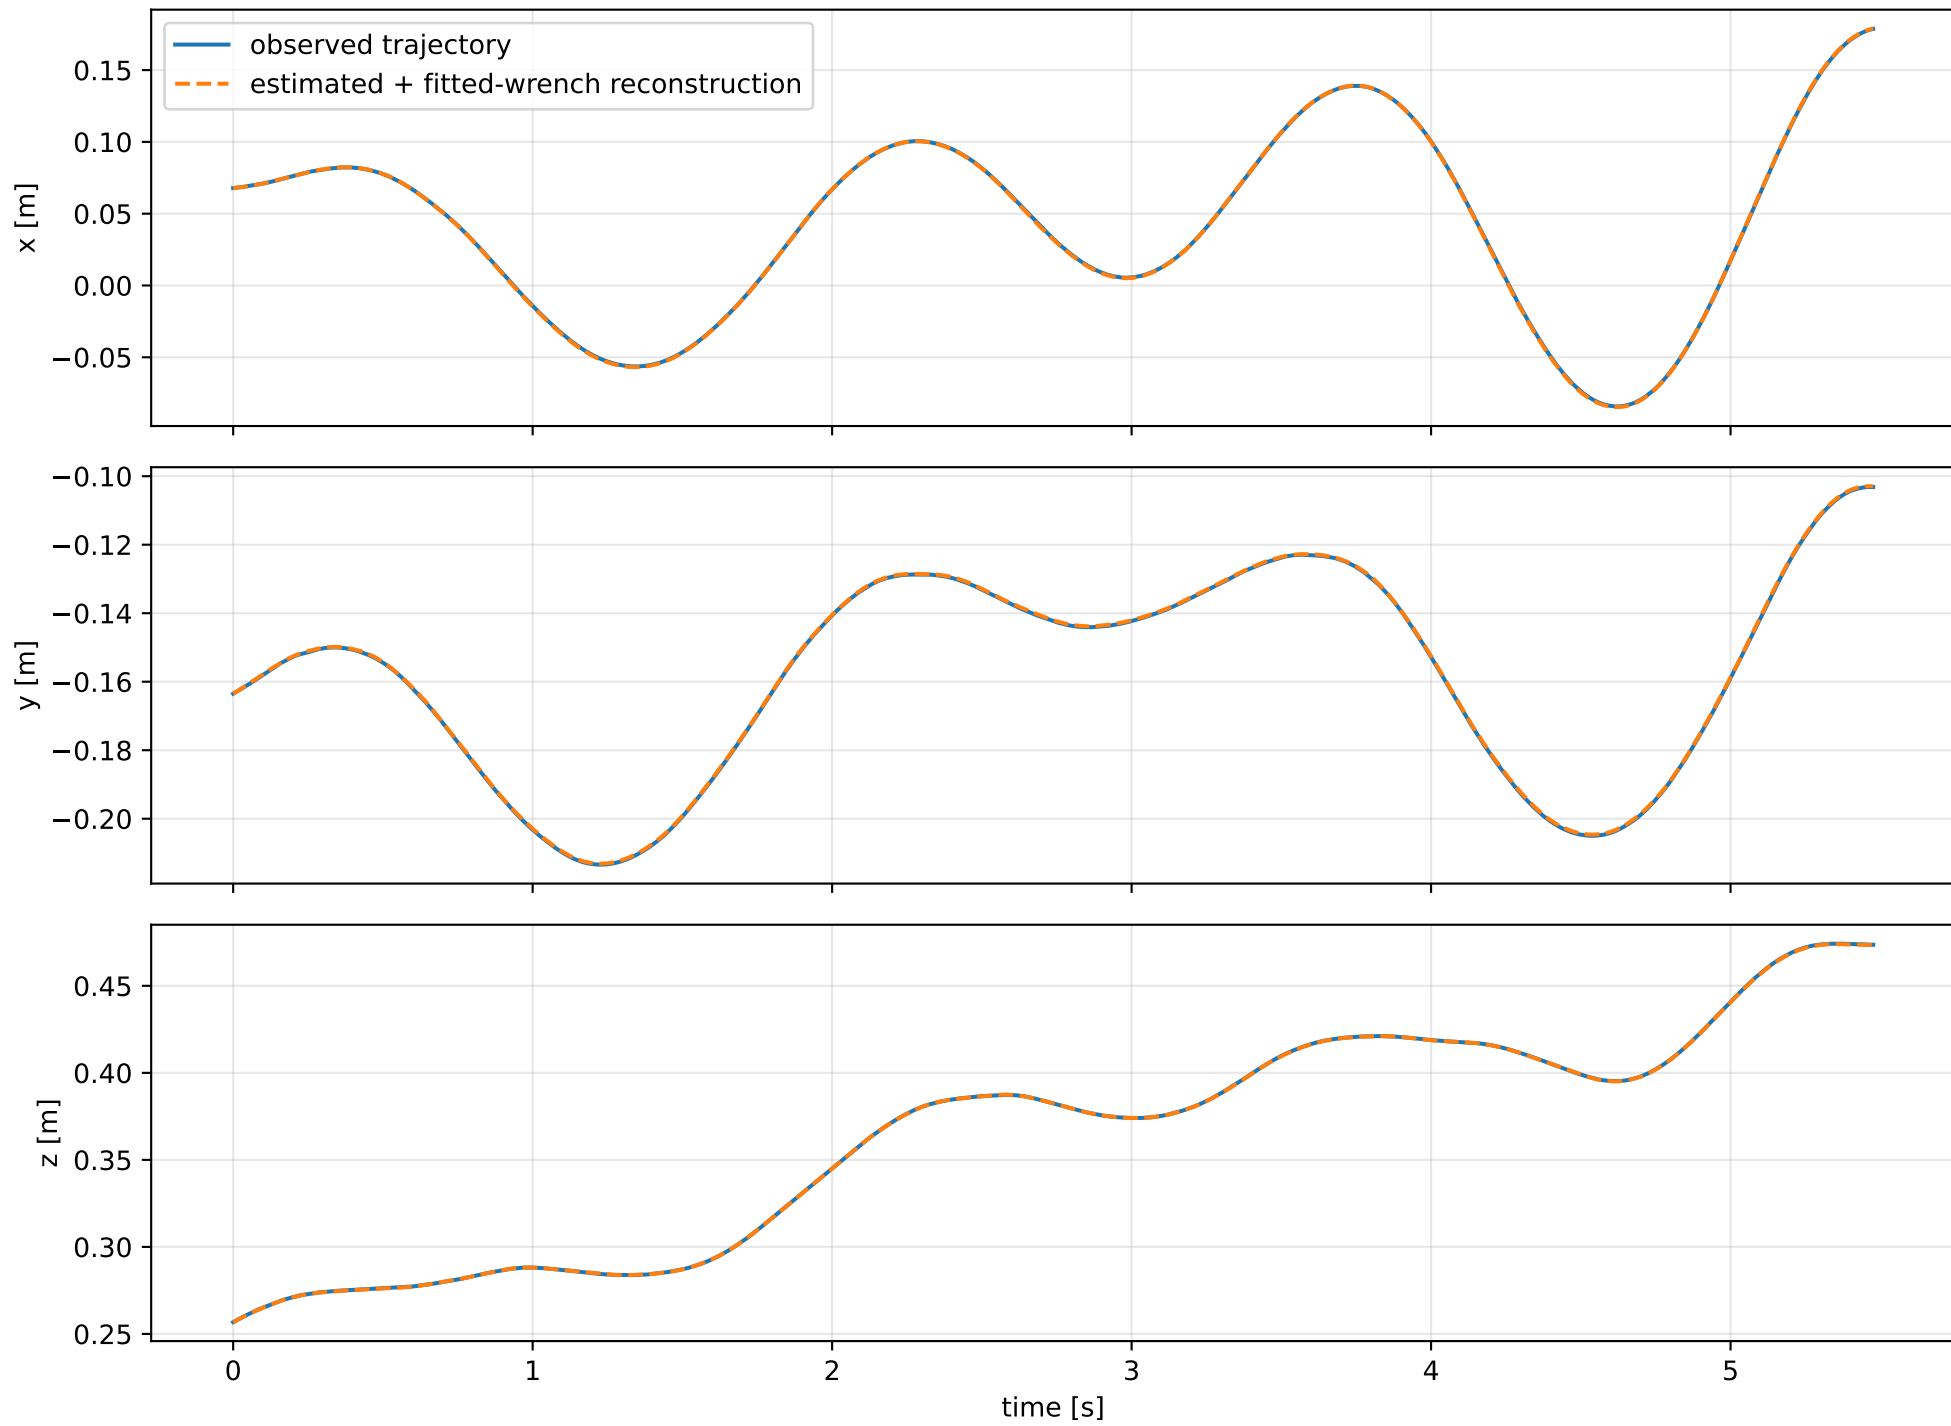
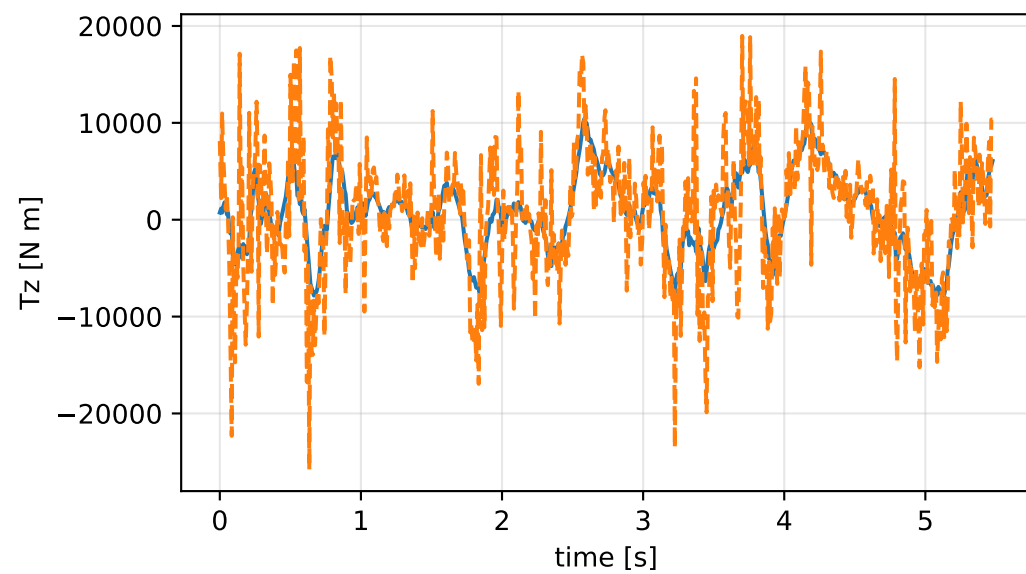
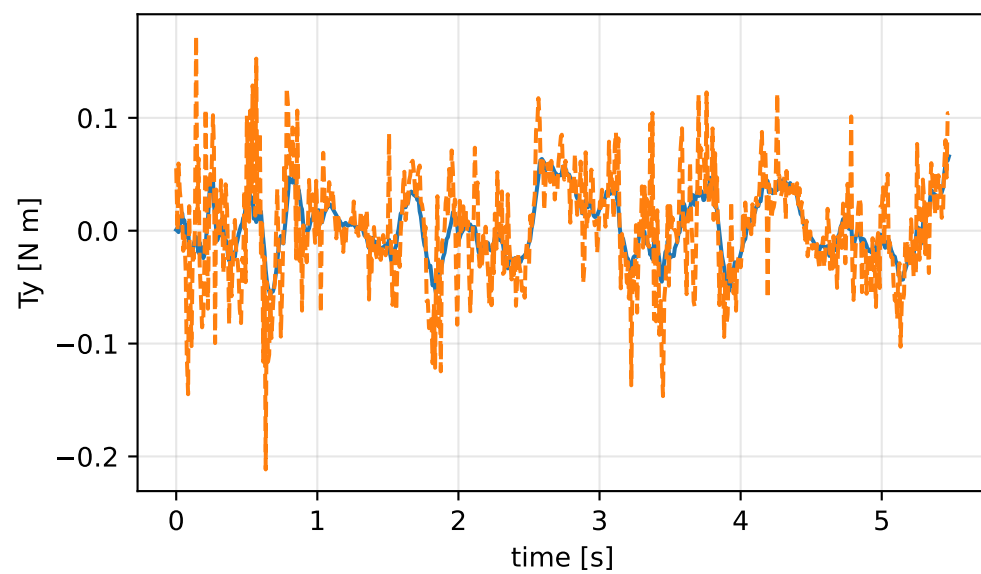
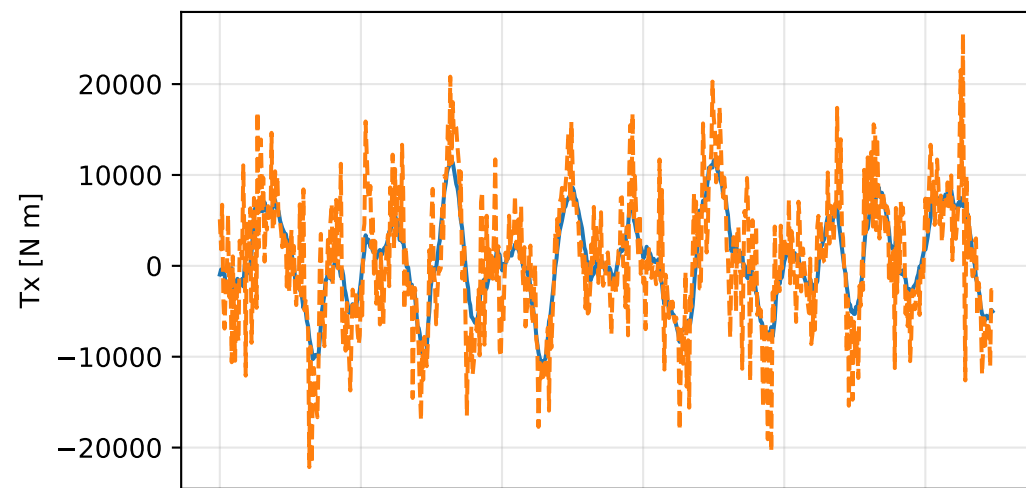
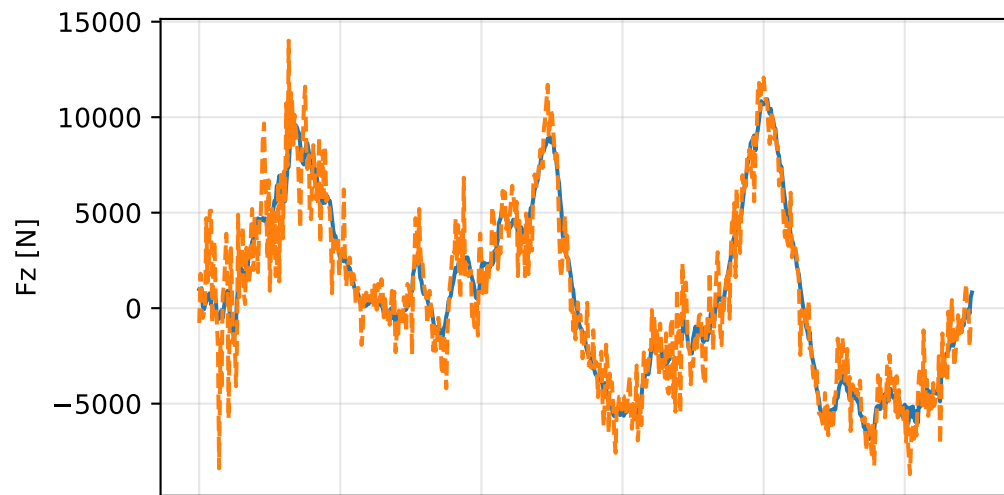


naive_all: trajectory

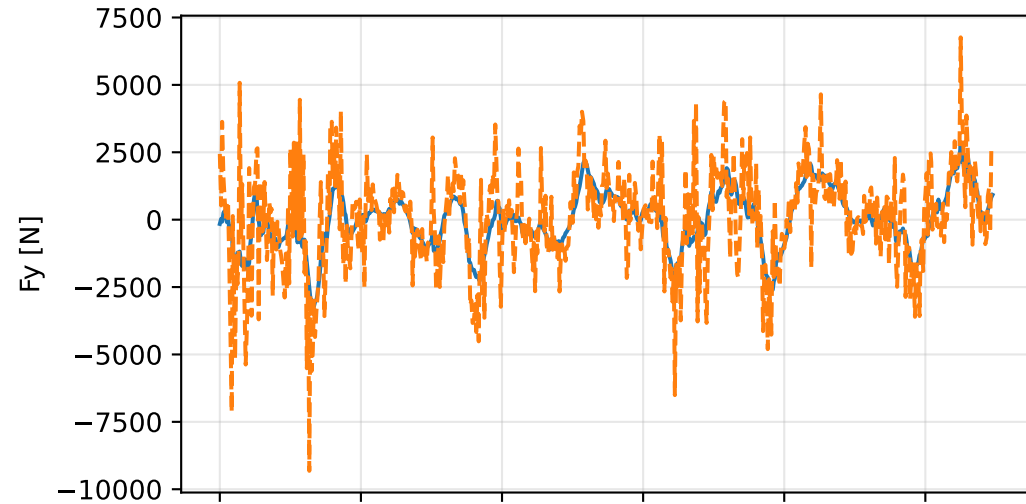


naive_all: residual wrench





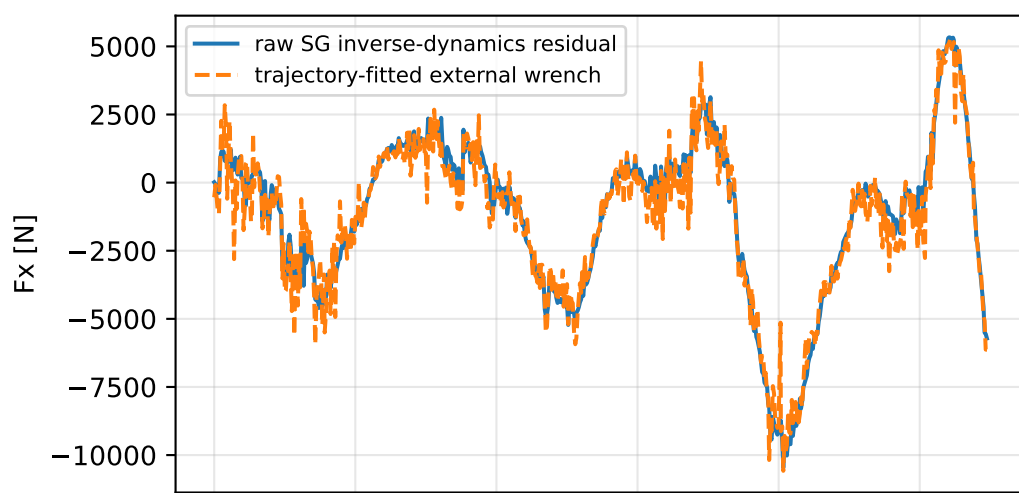


naive_all: measured sensor comparison

gyro

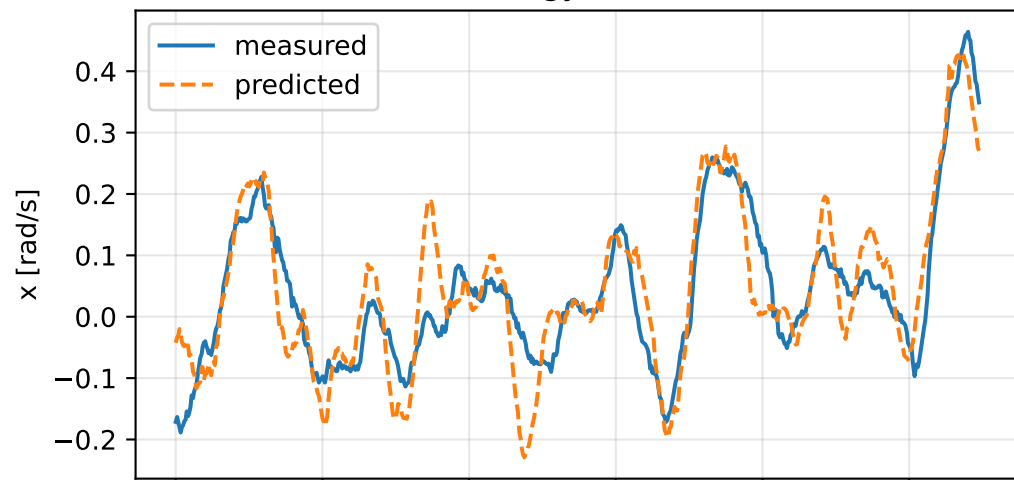

specific force

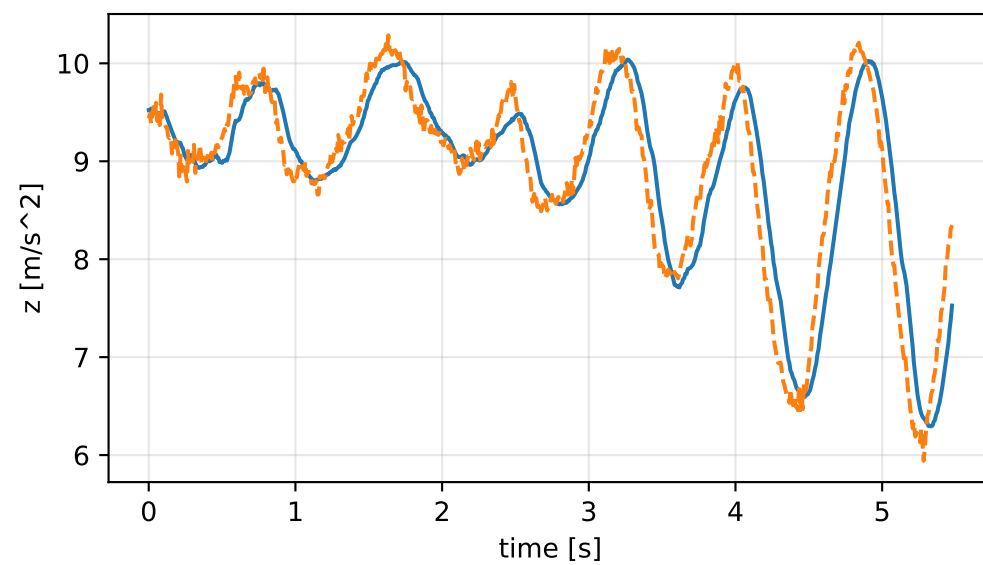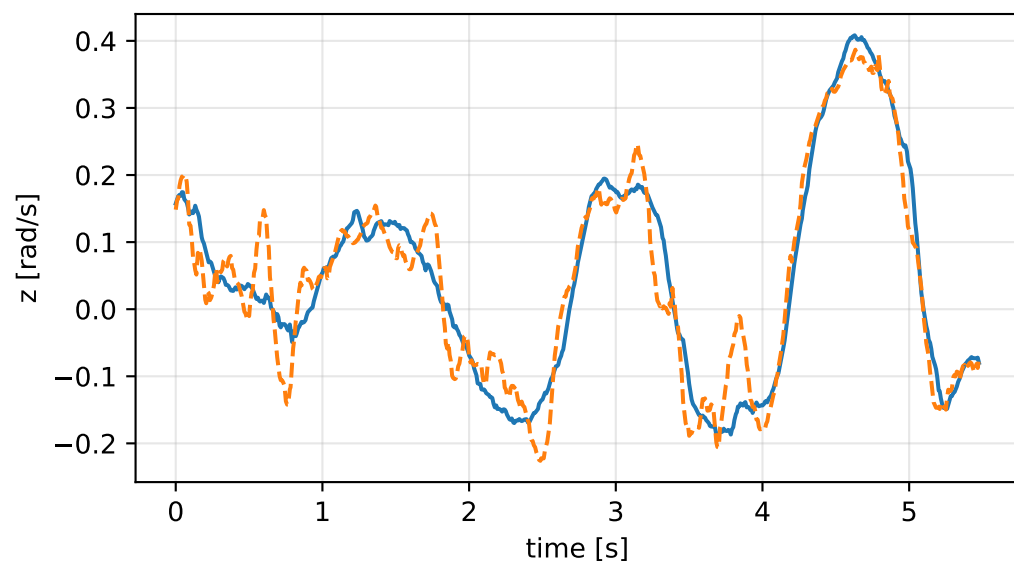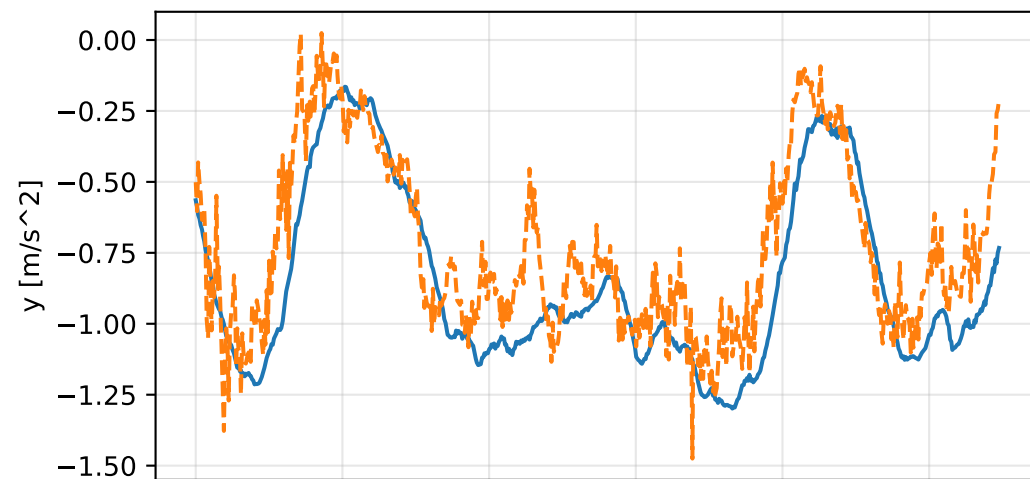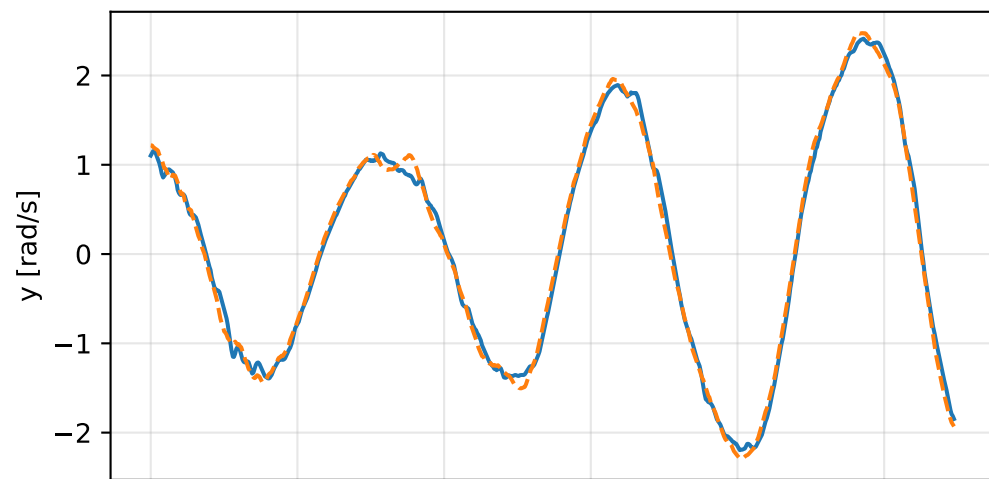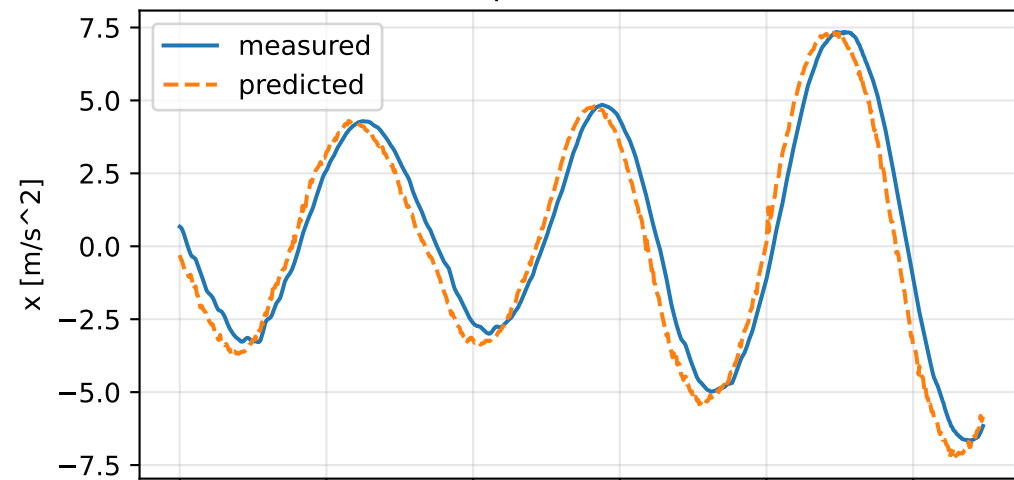

naive_all: nominal -> estimated parameters

Case: naive_all

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 4503.16366 delta 4500.81206

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [4.9032275e+03 1.6332435e-03 4.9878682e-03] d=[4.9031625e+03 1.6339714e-03
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [0.0016332 0.0104345 0.0257878] d=[0.001634 -0.0545181 0.0257877]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [4.9878682e-03 2.5787750e-02 4.9032306e+03] d=[4.9688531e-03 2.5787691e-02

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [0.2230898 -0.0115769 -0.0181031] d=[0.2251145 -0.0115464

rotor force effectiveness

[1. 1. 1. 1.] -> [7.8717043e-07 3.4215113e+03 3.1216455e+03 7.6655036e-07] d=[-9.9999921e-01 3.4205113e+03 3.1206455e+03

rotor lag [s] 0

gimbal lag [s] 0