

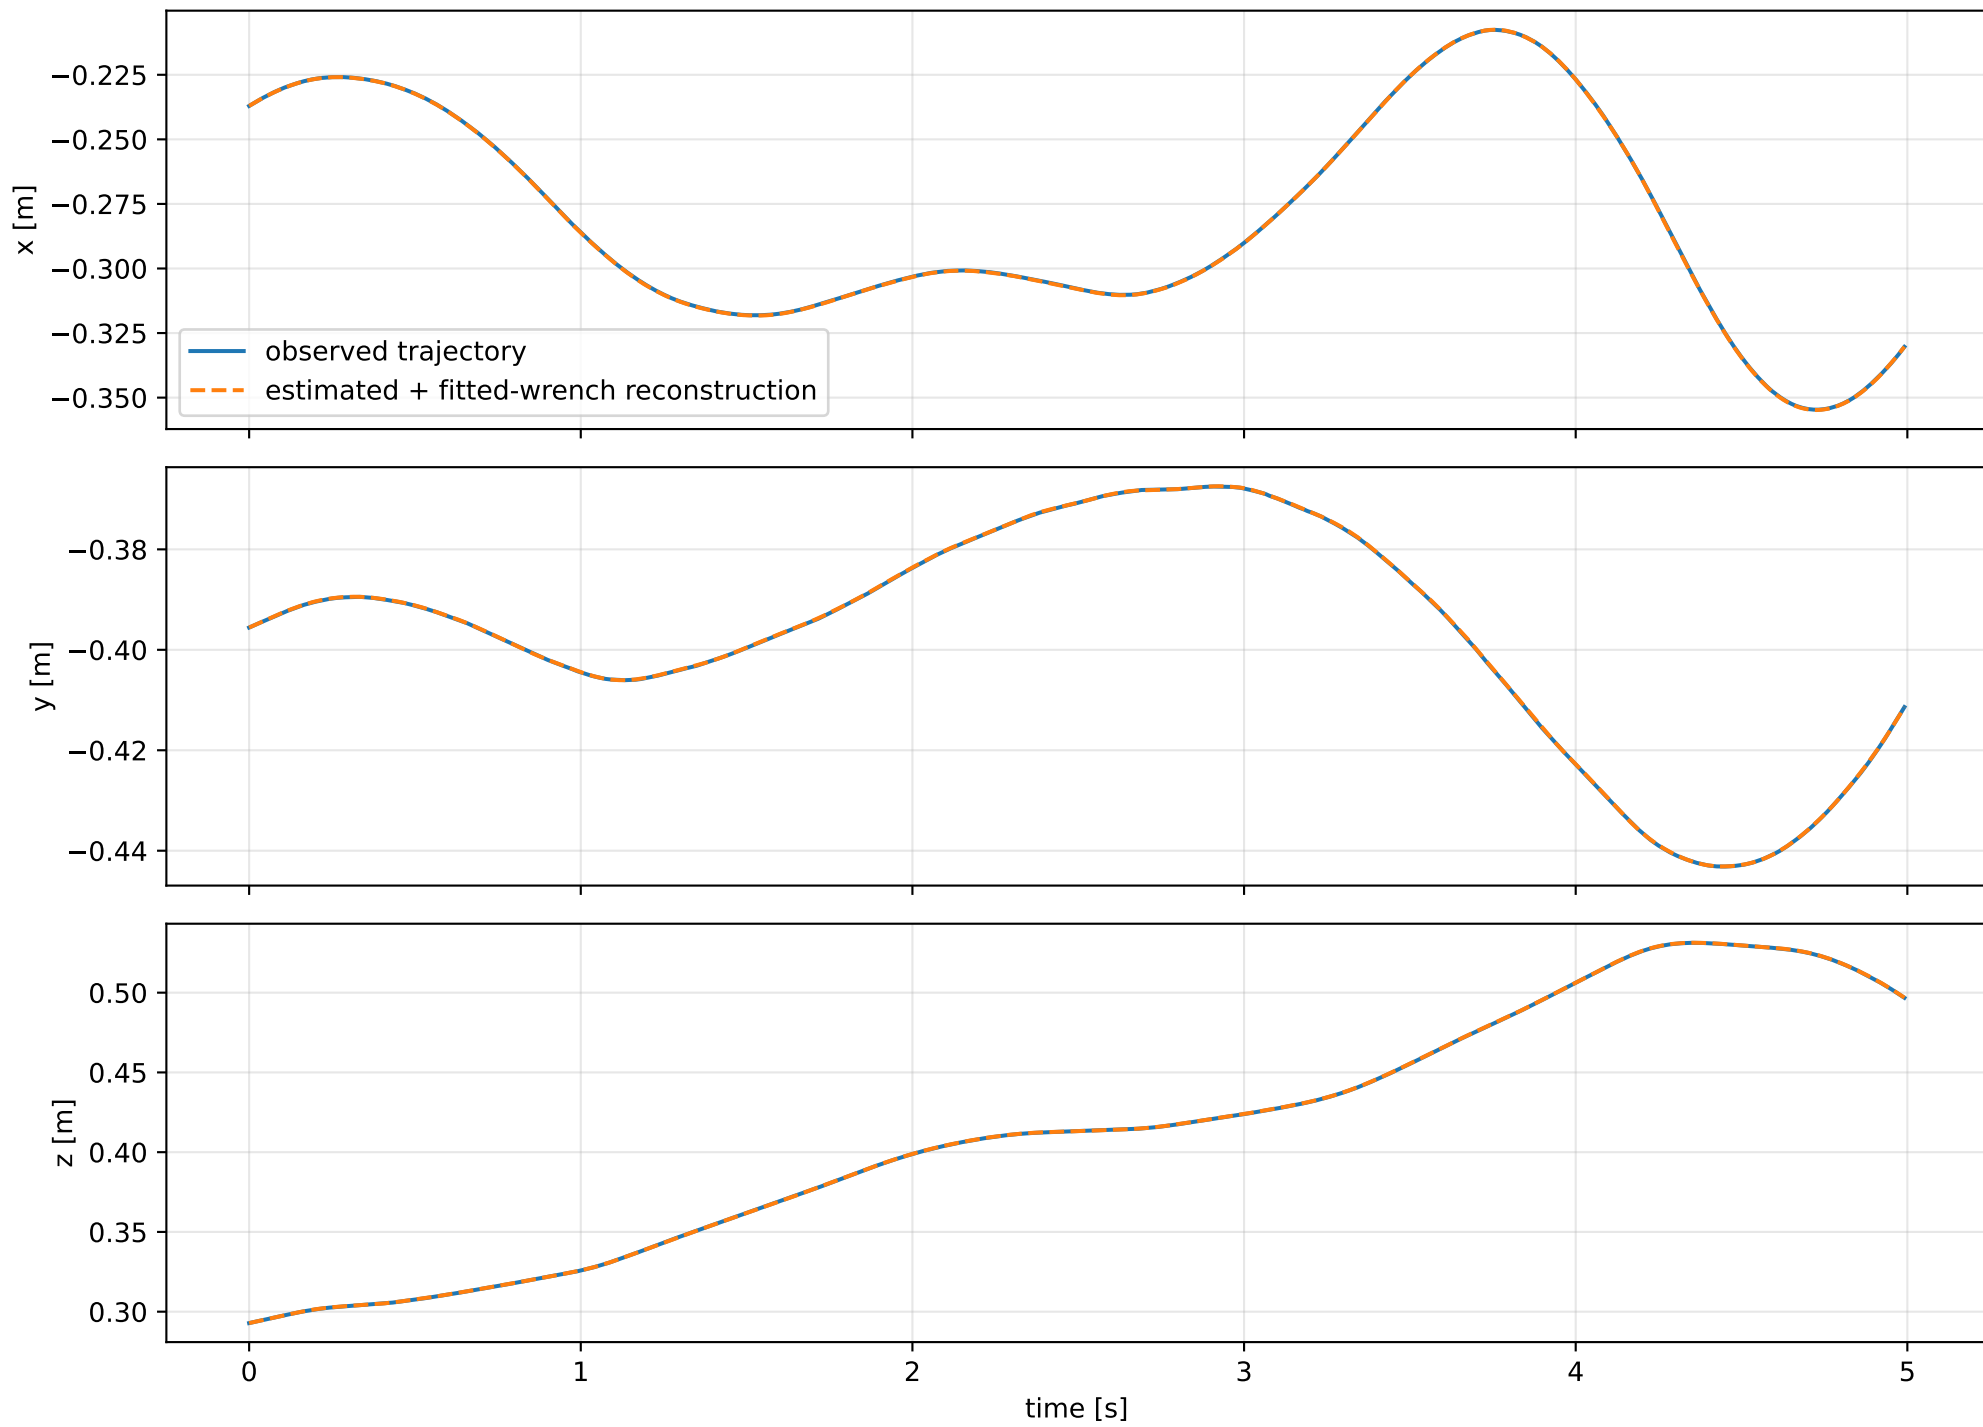
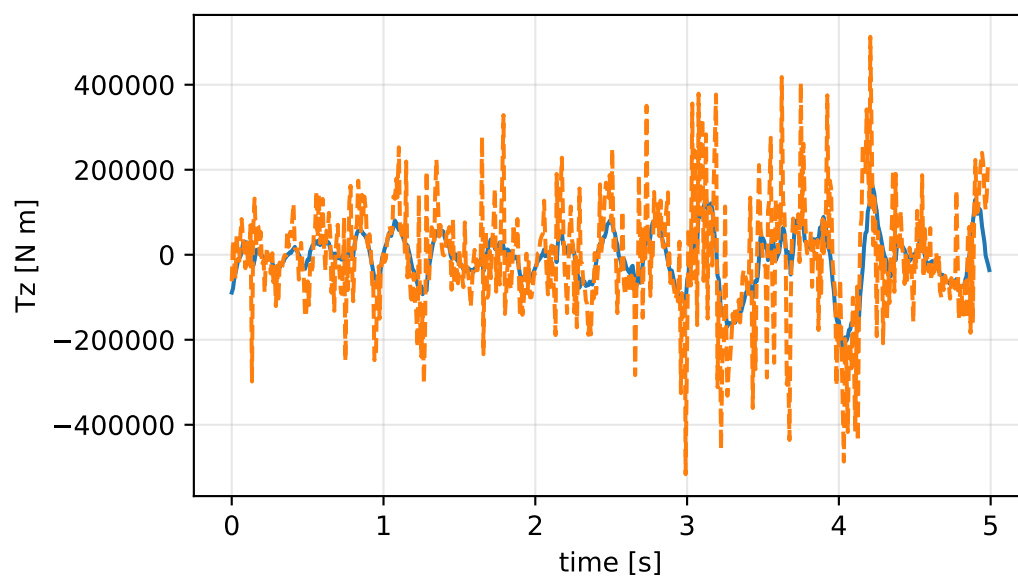
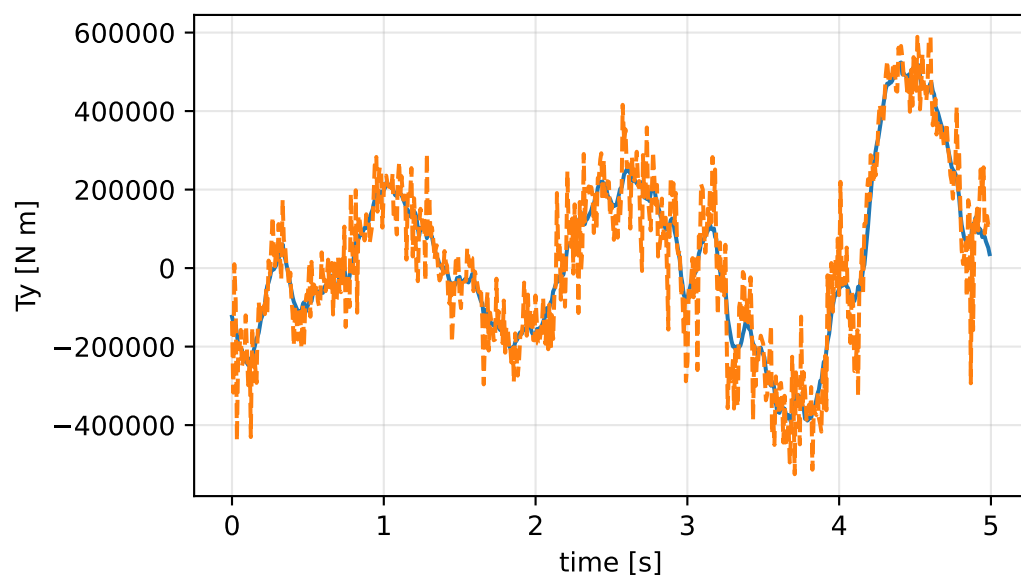
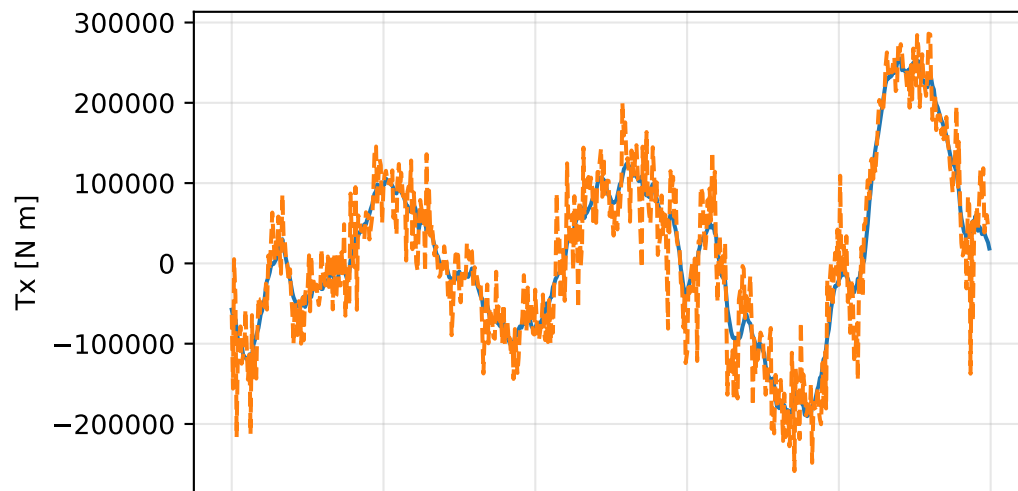
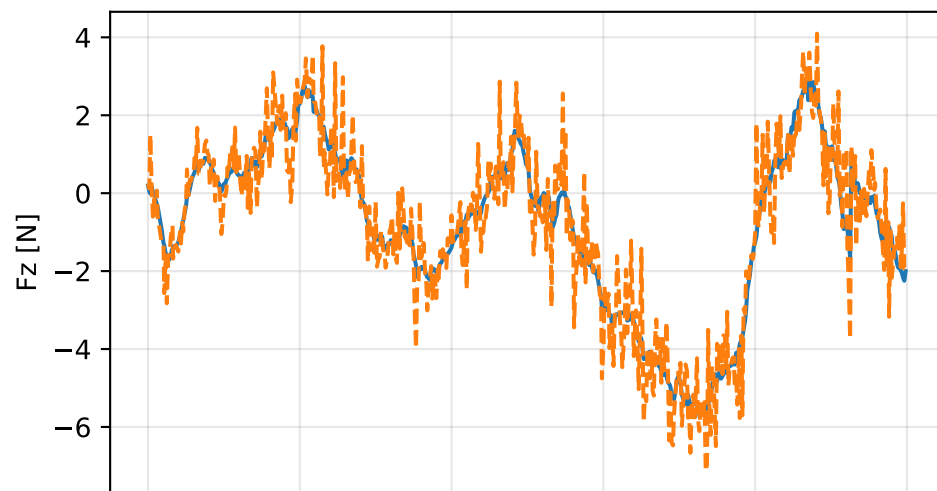


actuator_direct_command: trajectory

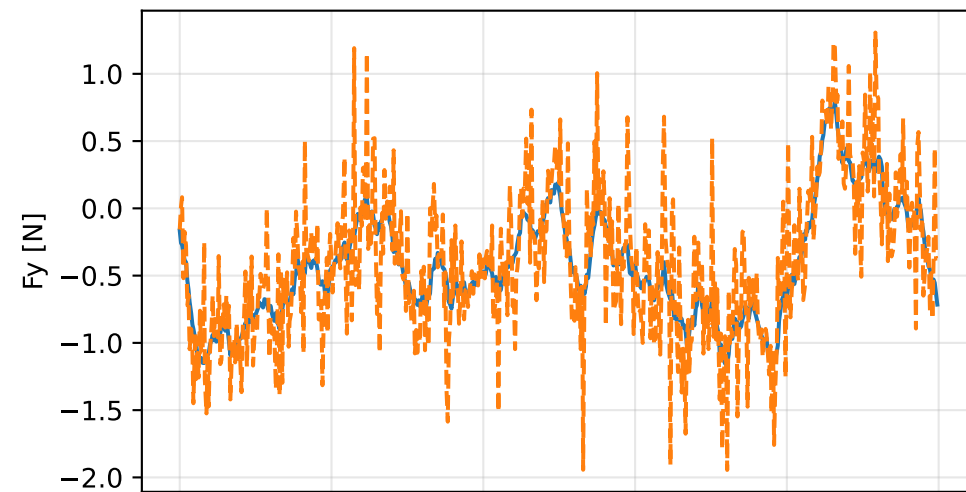


actuator_direct_command: residual wrench





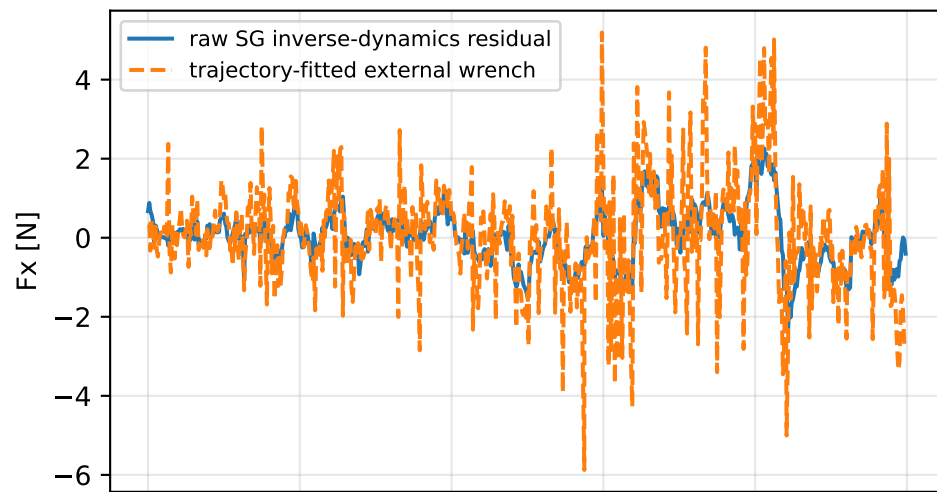


actuator_direct_command: measured sensor comparison

gyro

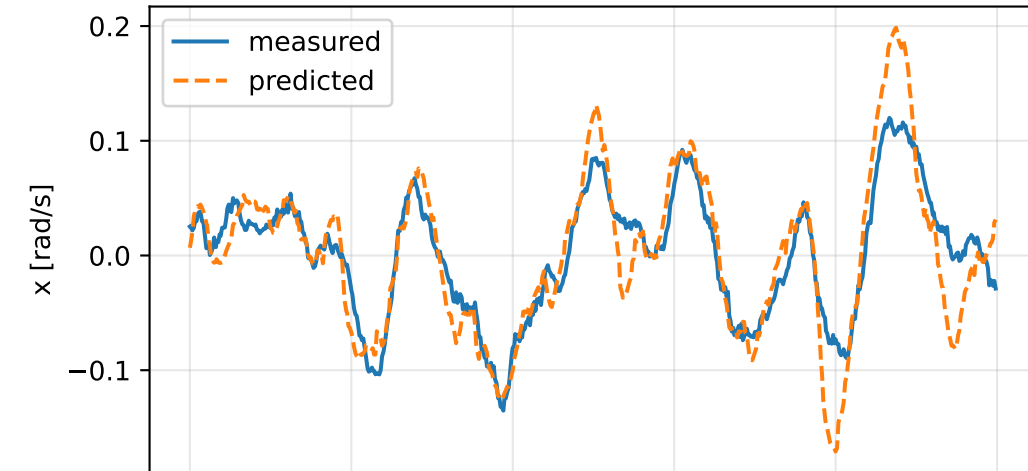

specific force

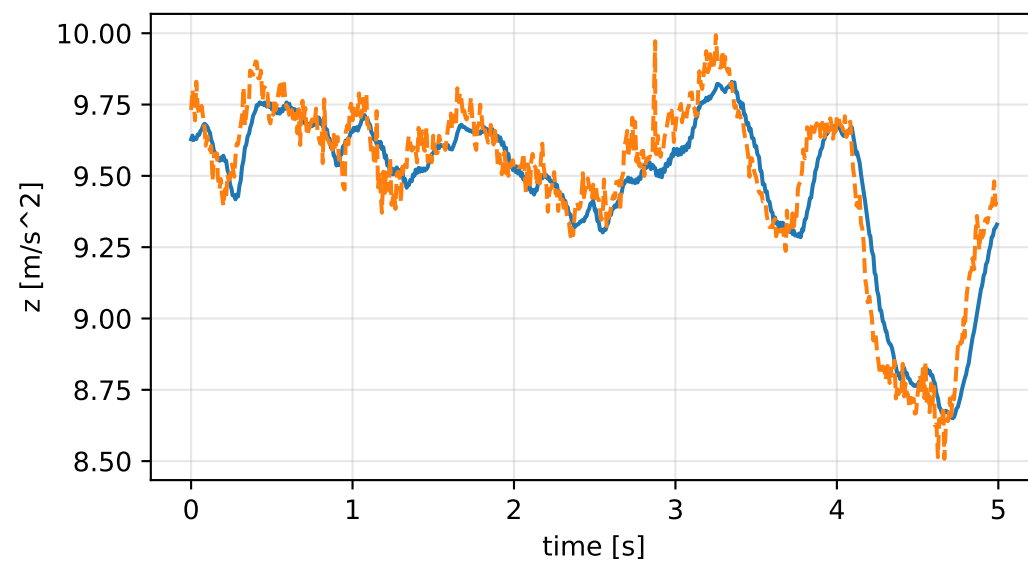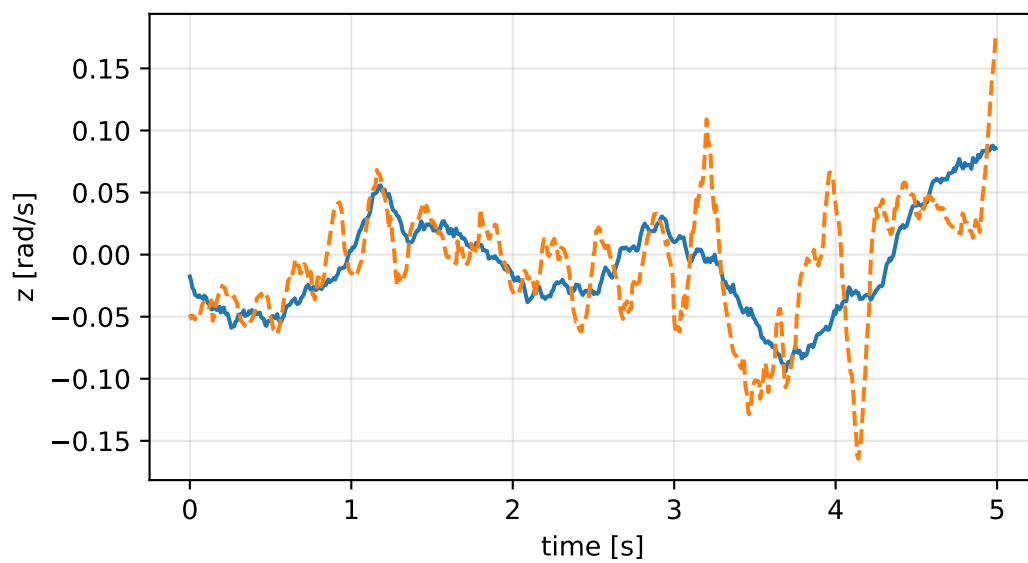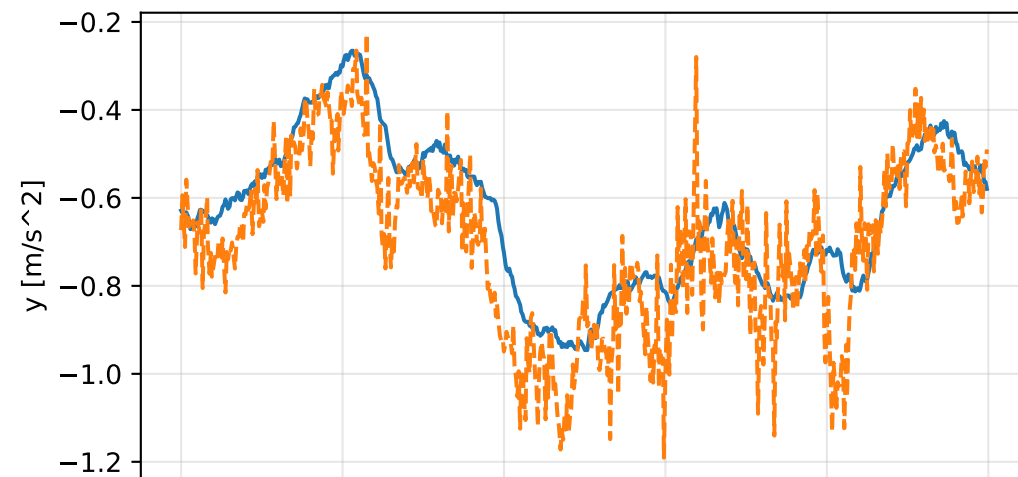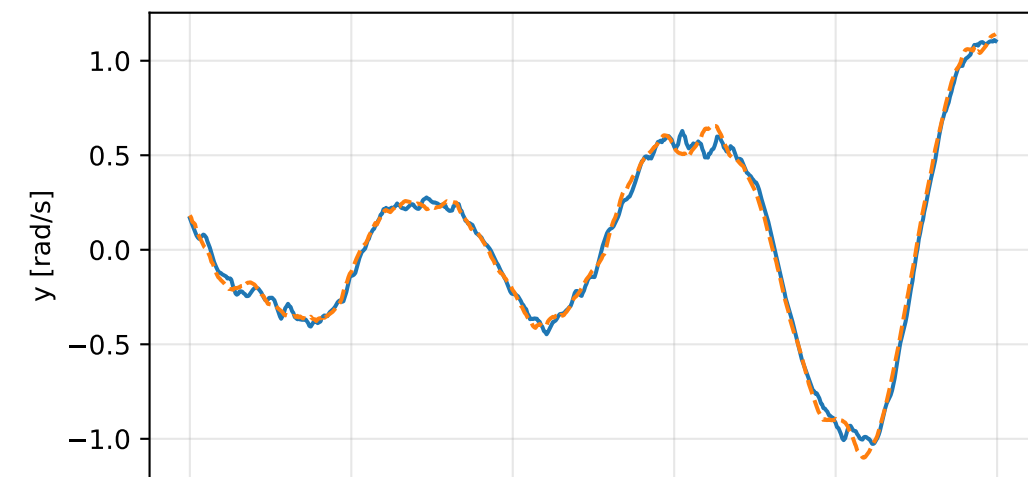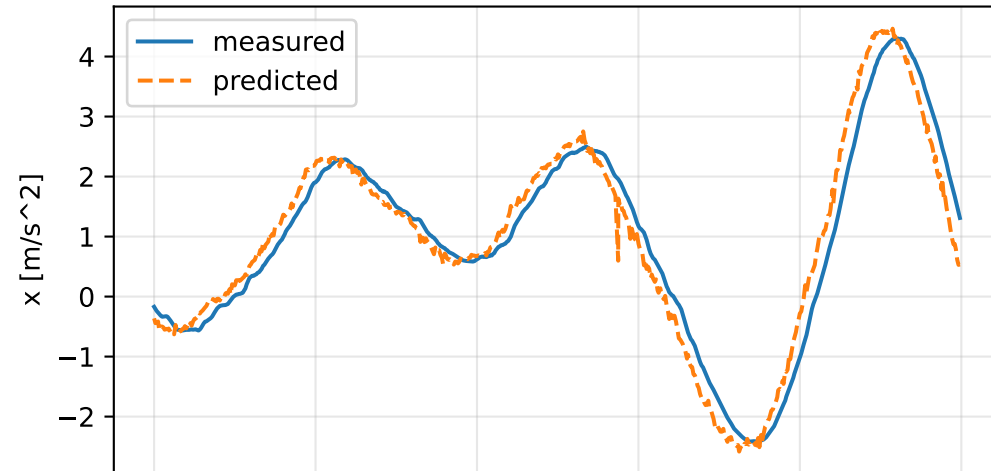

actuator_direct_command: nominal -> estimated parameters

Case: actuator_direct_command

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 5.03169989 delta 2.6801023

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [28268.4757586 57635.4743018 -3806.4043639] d=[28268.4107585 57635.4743018
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [57635.4743018 118146.2516964 1858.787524] d=[57635.4743025 118146.2516964
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-3806.4043639 1858.787524 146169.1594852] d=[-3806.4043829 1858.787524 146169.1594852]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0974178 0.2048925 -0.0266725] d=[-0.0953931 0.204923 0.0266725]

rotor force effectiveness

[1. 1. 1. 1.] -> [4.4648380e-06 2.2093467e+00 3.7736699e+00 1.5431749e+00] d=[-0.9999955 1.2093467 2.7736699 0.5431749]

rotor lag [s] 0.105288883

gimbal lag [s] 0.0442393706