

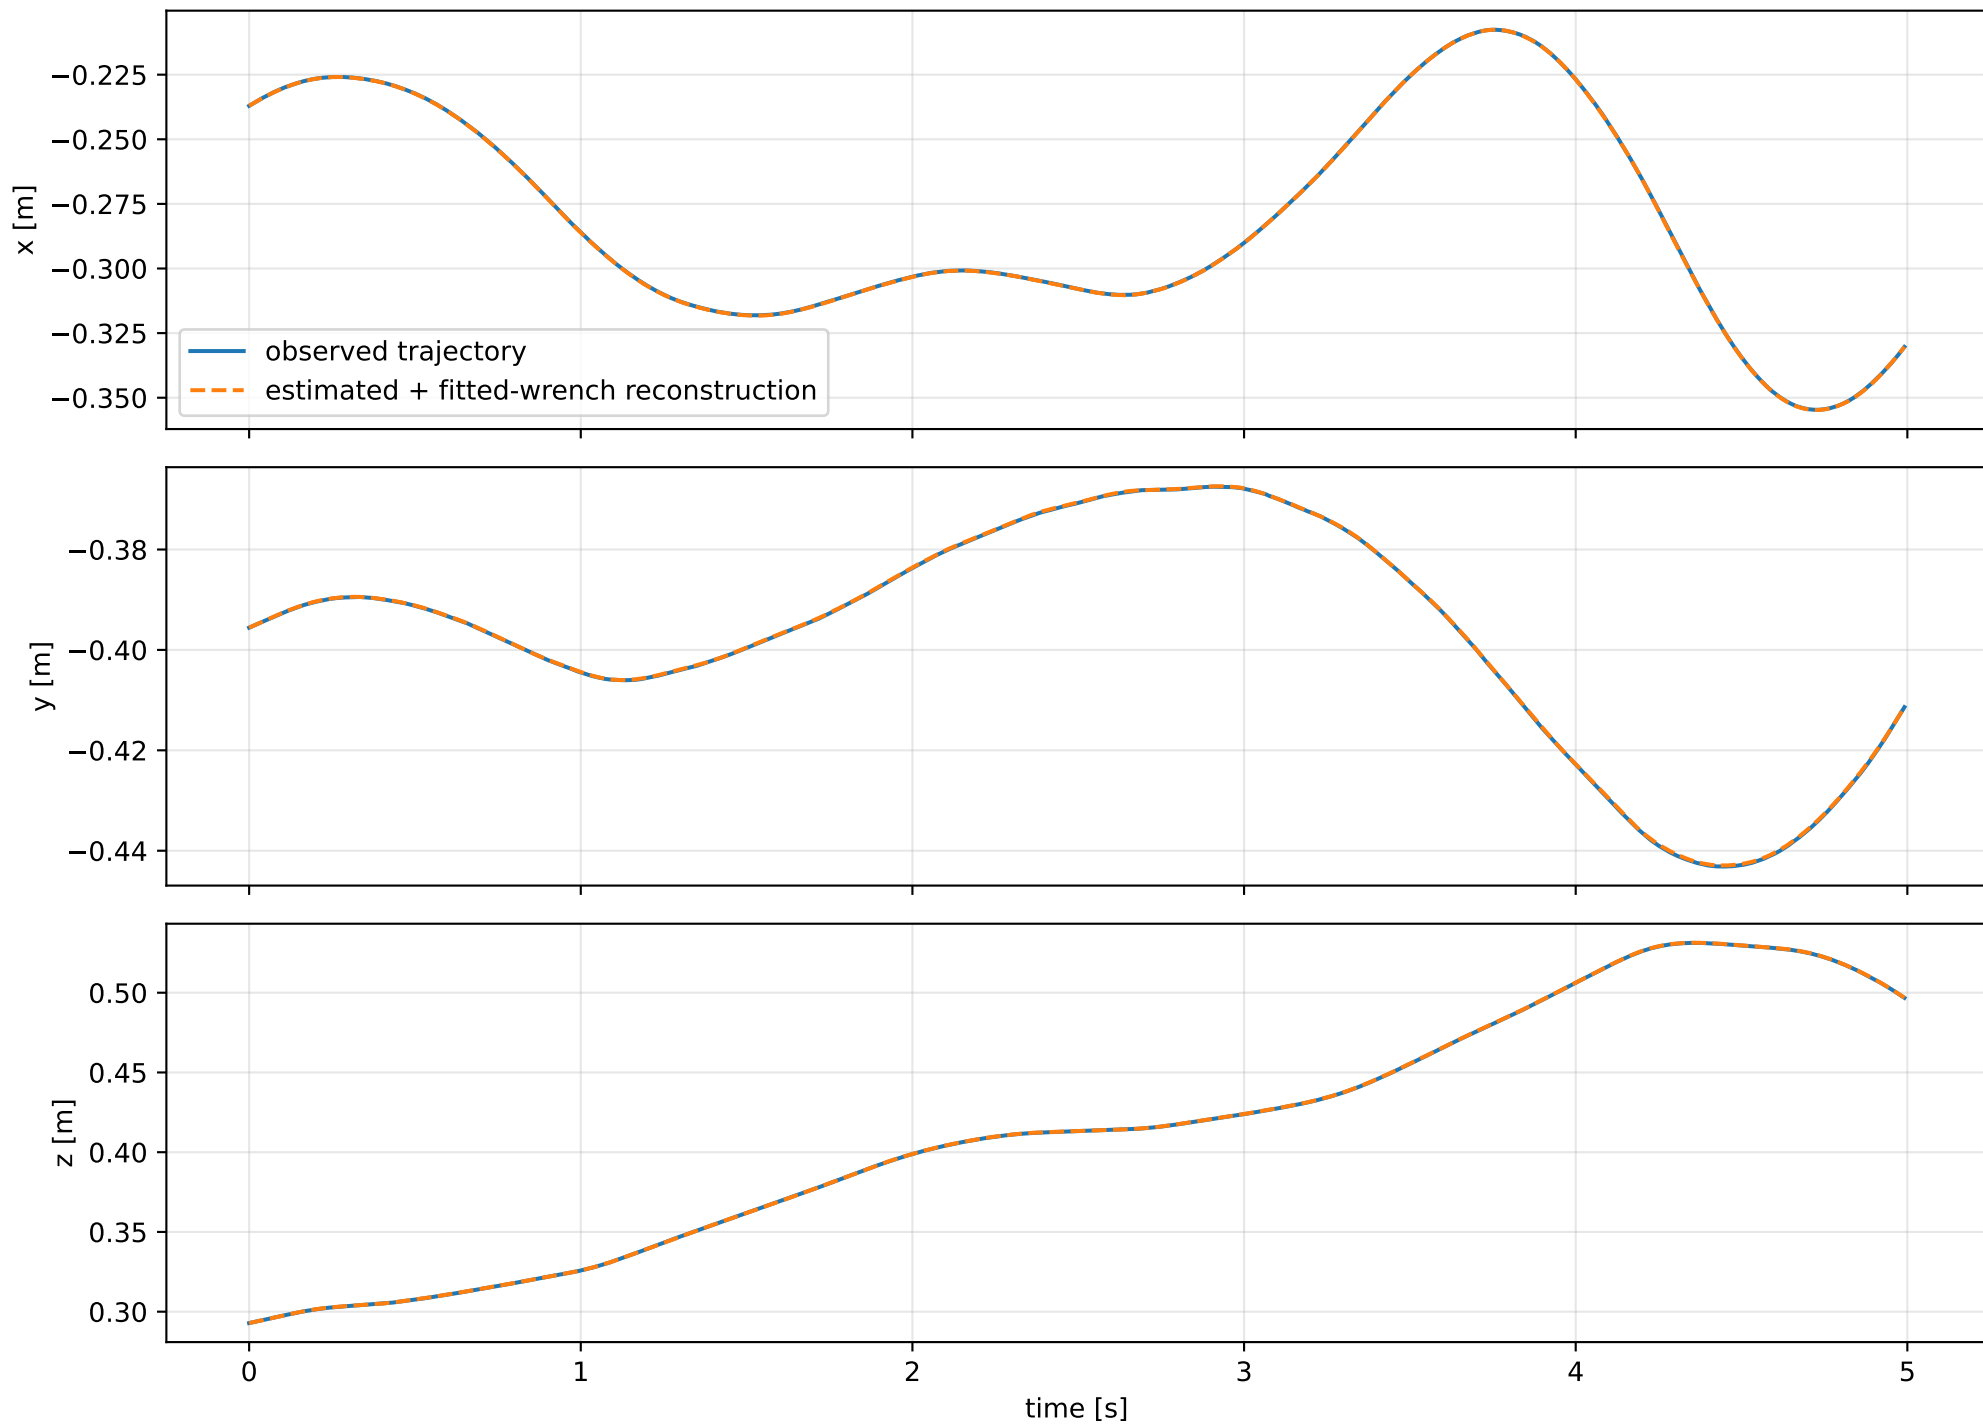
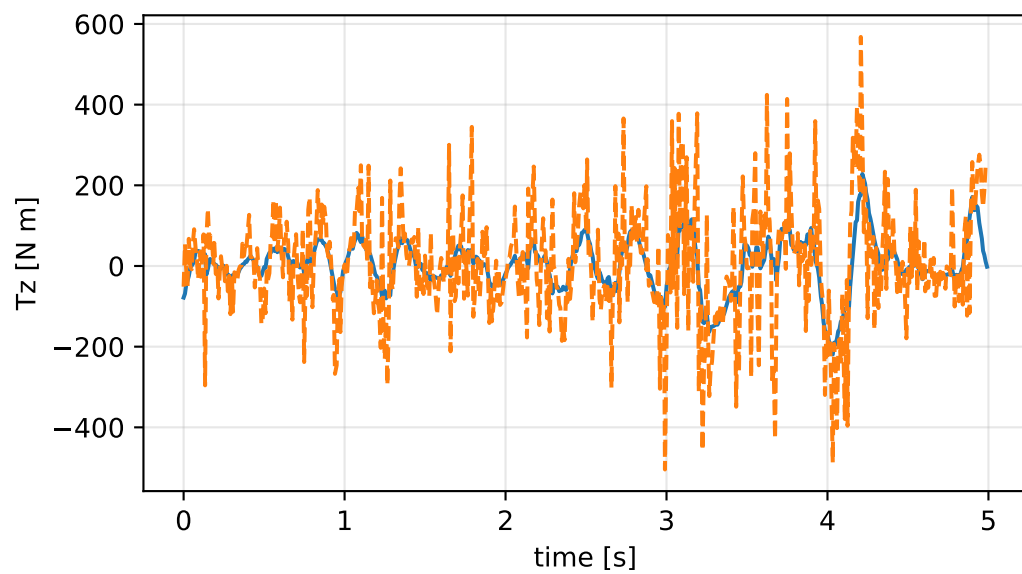
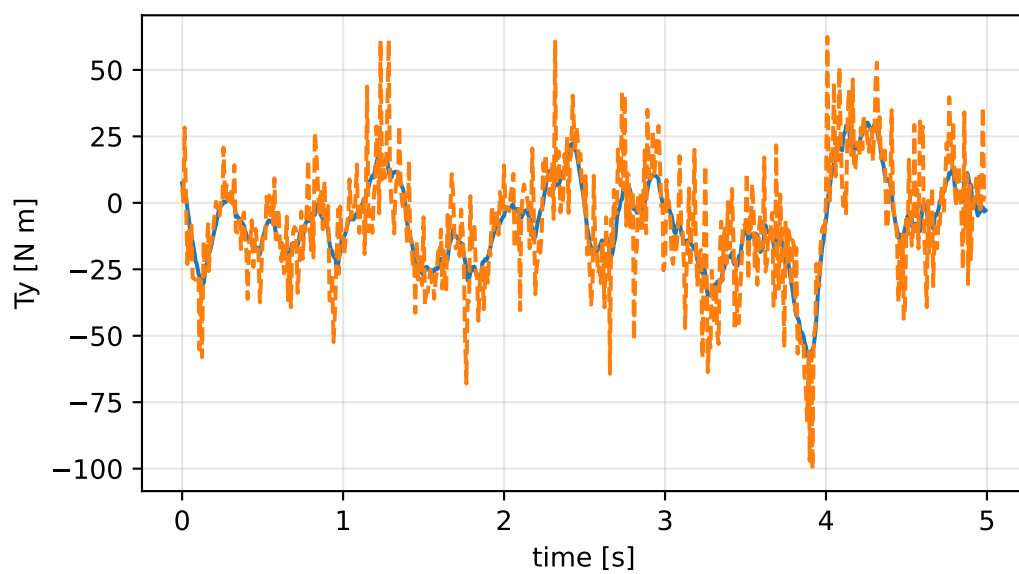
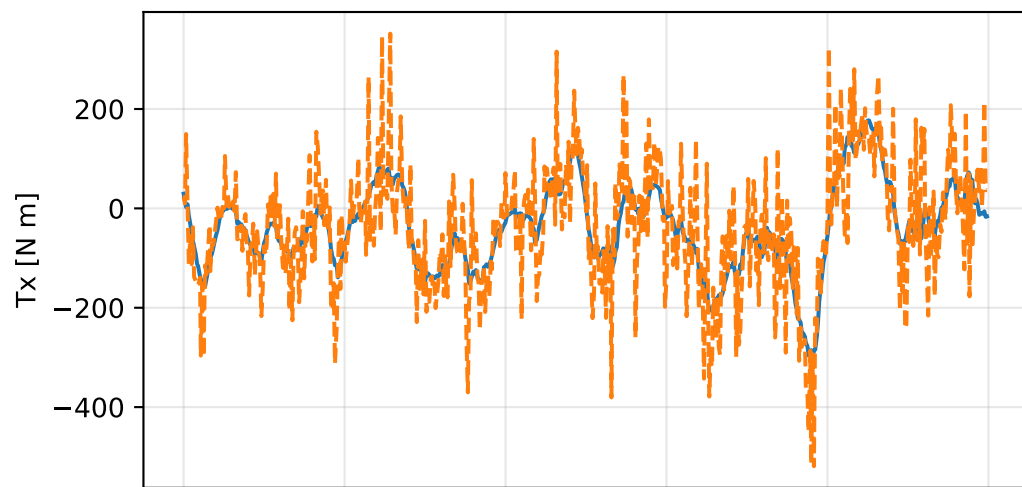
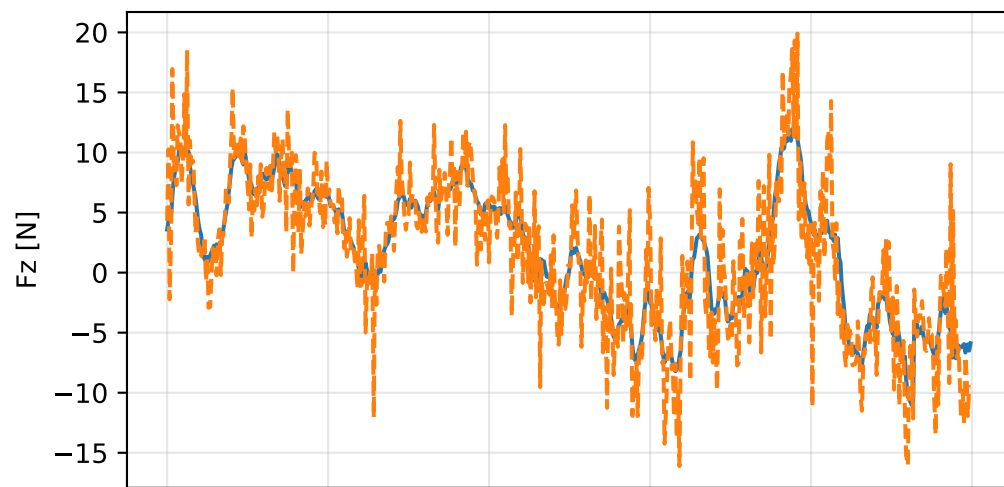


cov_diagonal: trajectory

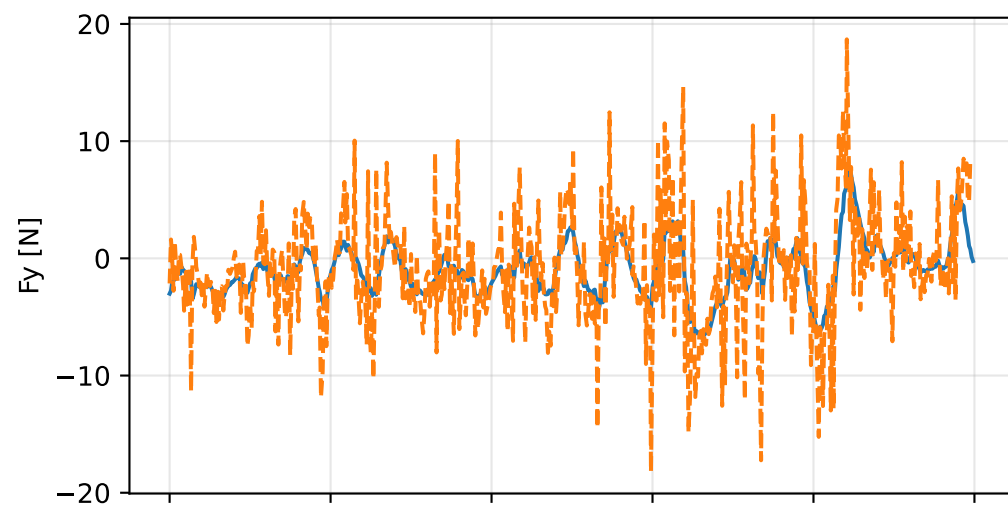


cov_diagonal: residual wrench





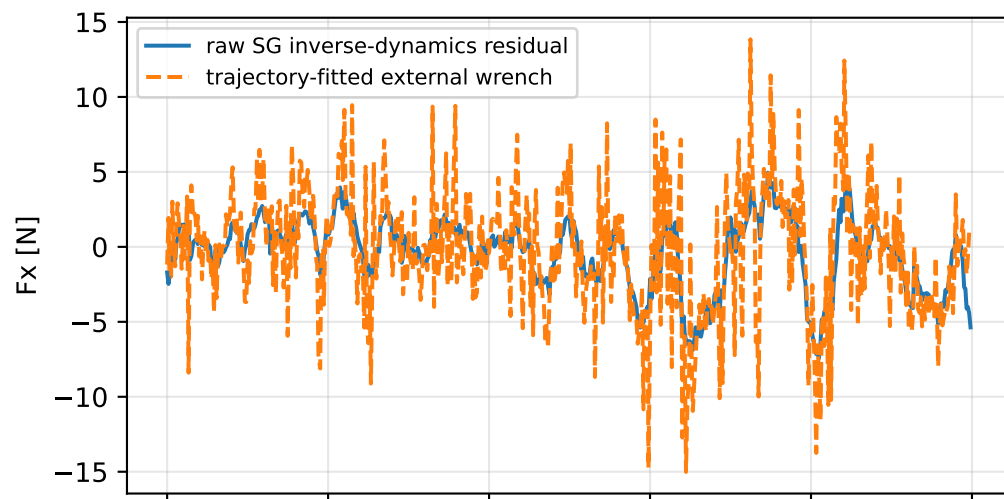


cov_diagonal: measured sensor comparison

gyro

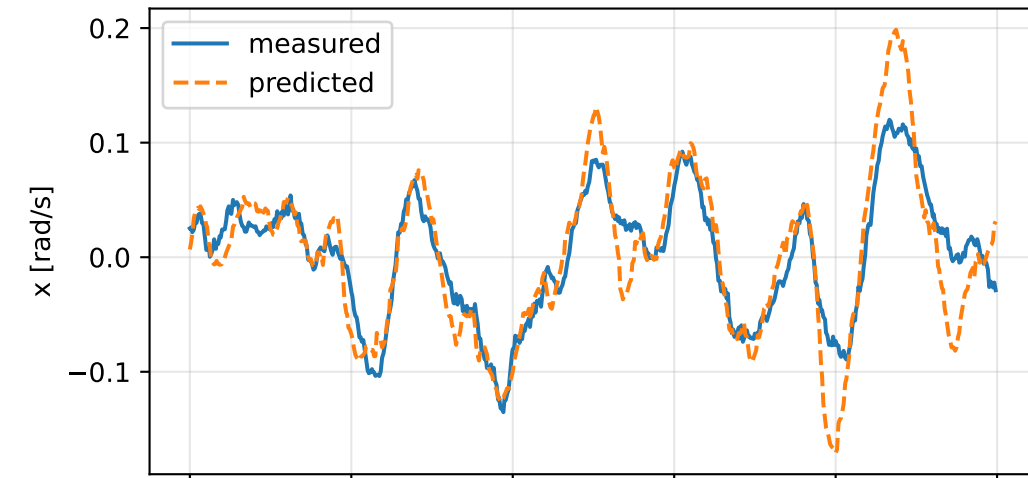

specific force

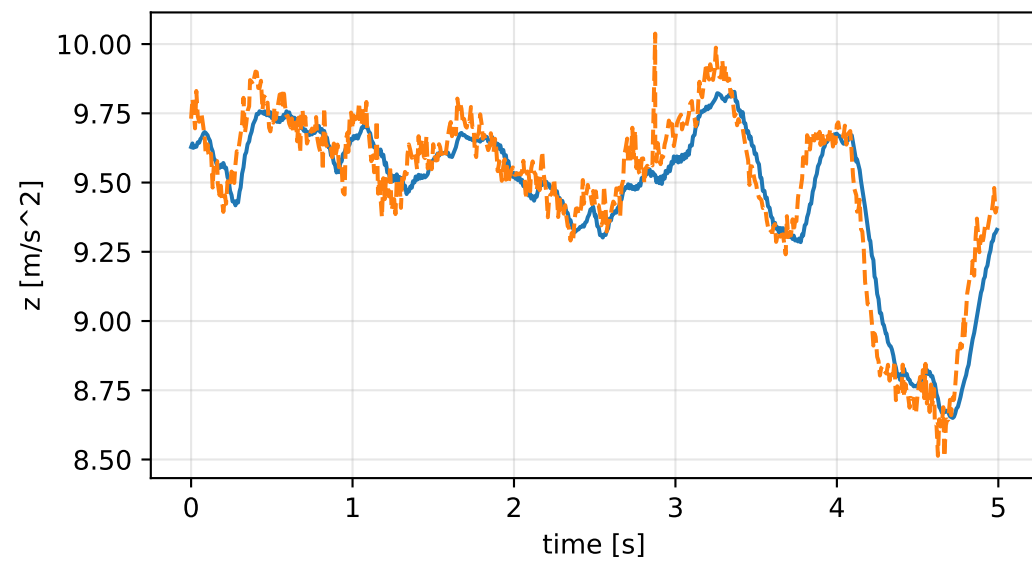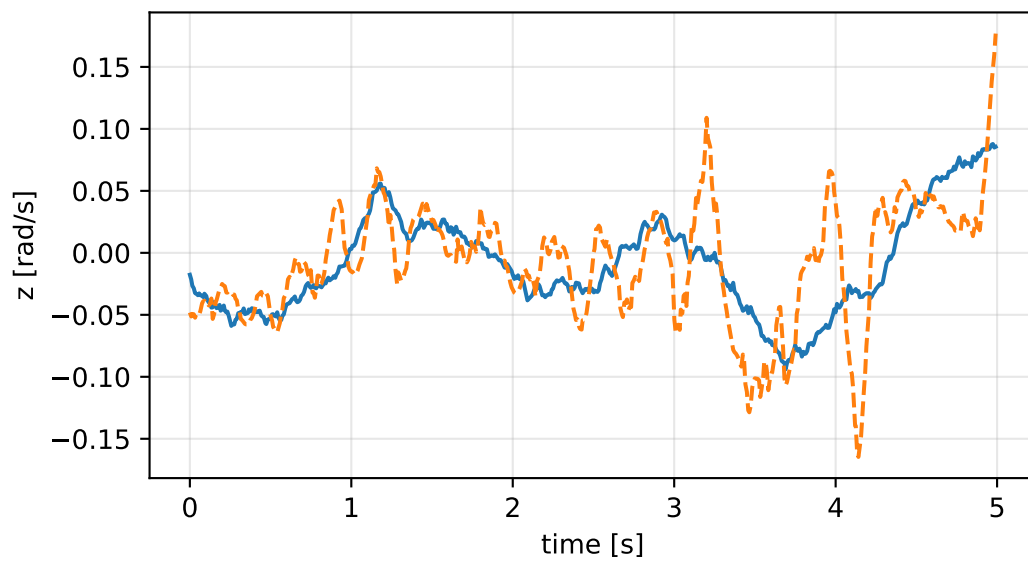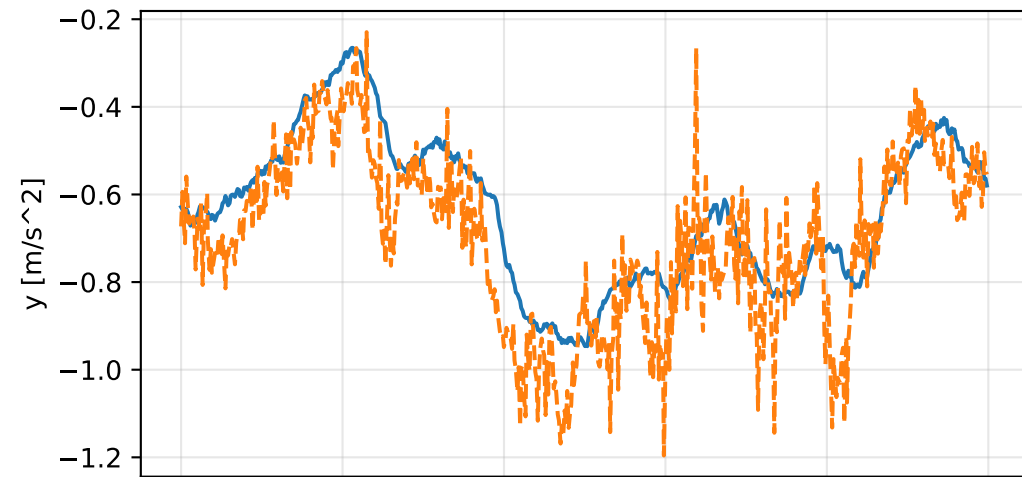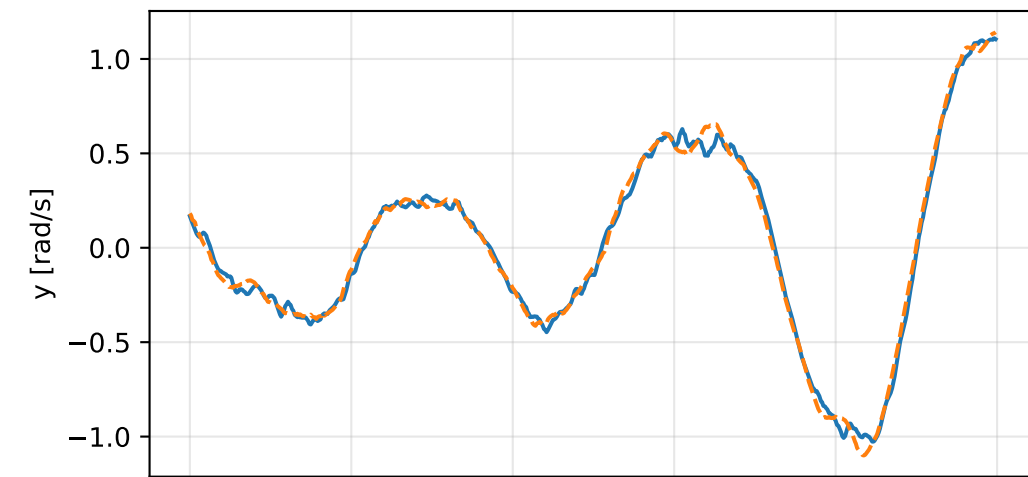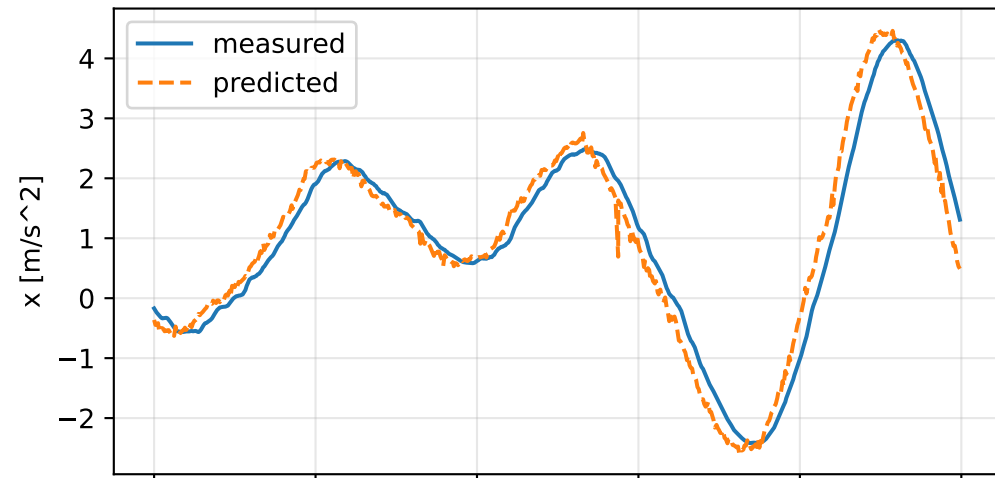

cov_diagonal: nominal -> estimated parameters

Case: cov_diagonal

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 12.007536 delta 9.65593837

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [141.4087034 26.6029373 0.6068201] d=[141.3437034 26.602938 0.6068201]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [26.6029373 5.1401691 -3.3511204] d=[26.602938 5.0752165 -3.3511205]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [0.6068201 -3.3511204 146.3194711] d=[0.6068011 -3.3511205 146.1904711]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [0.2907067 -0.3915031 -0.0283013] d=[0.2927314 -0.3914720 -0.0283013]

rotor force effectiveness

[1. 1. 1. 1.] -> [3.0689570e-05 8.5387164e+00 8.7083541e+00 2.9995725e-01] d=[-0.9999693 7.5387164 7.7083541 -0.7000422]

rotor lag [s] 0.110354471

gimbal lag [s] 0.0517409486