

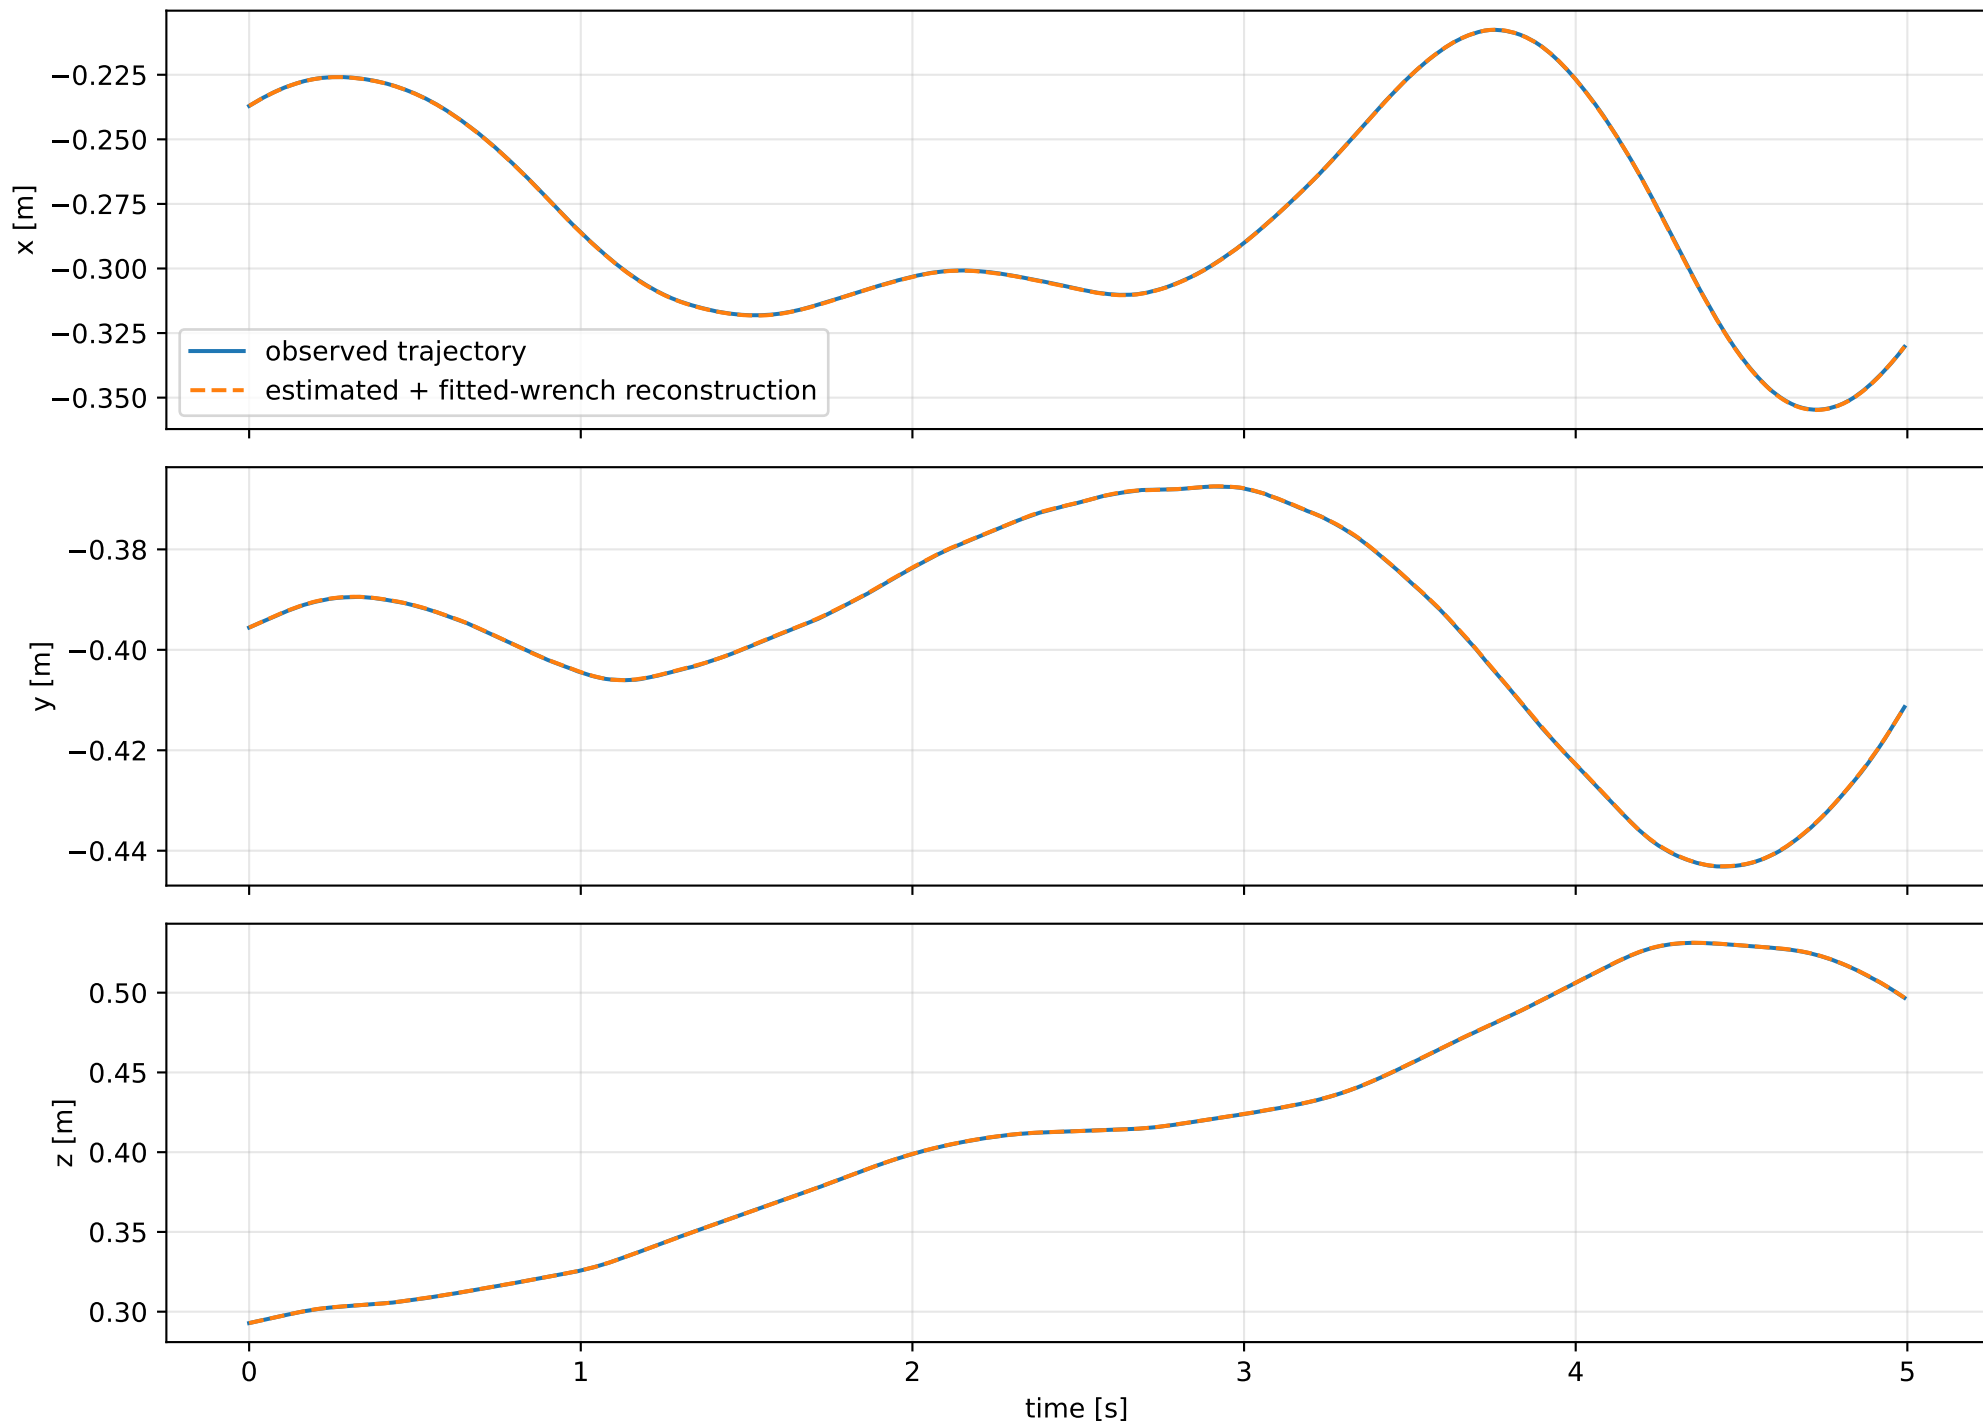
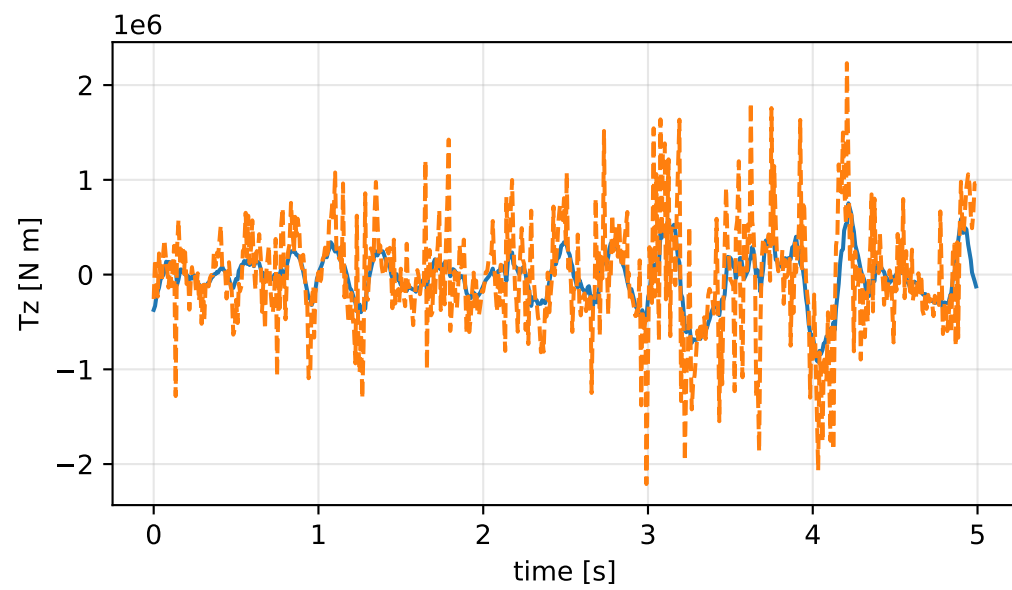
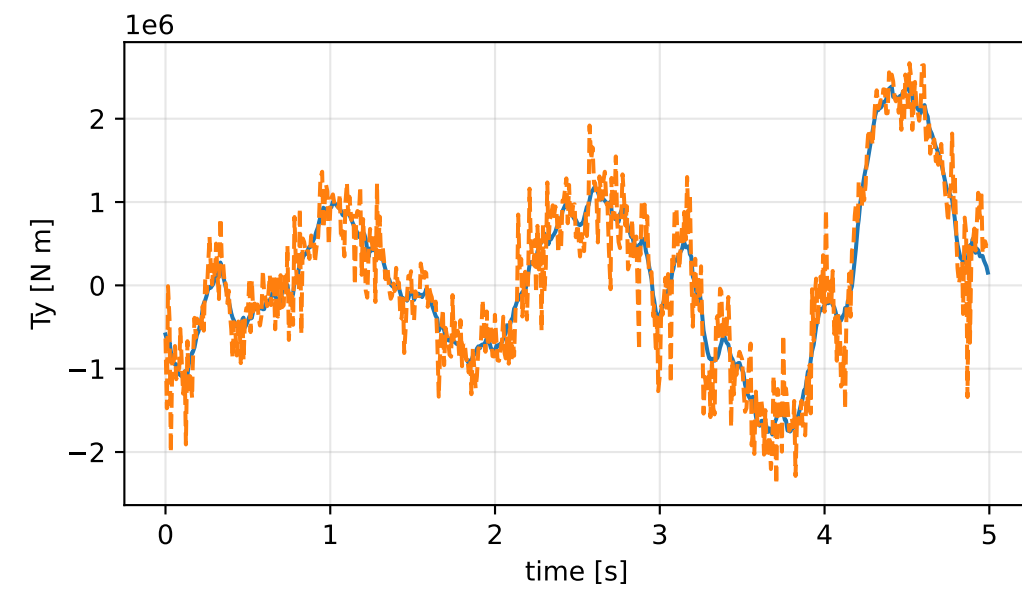
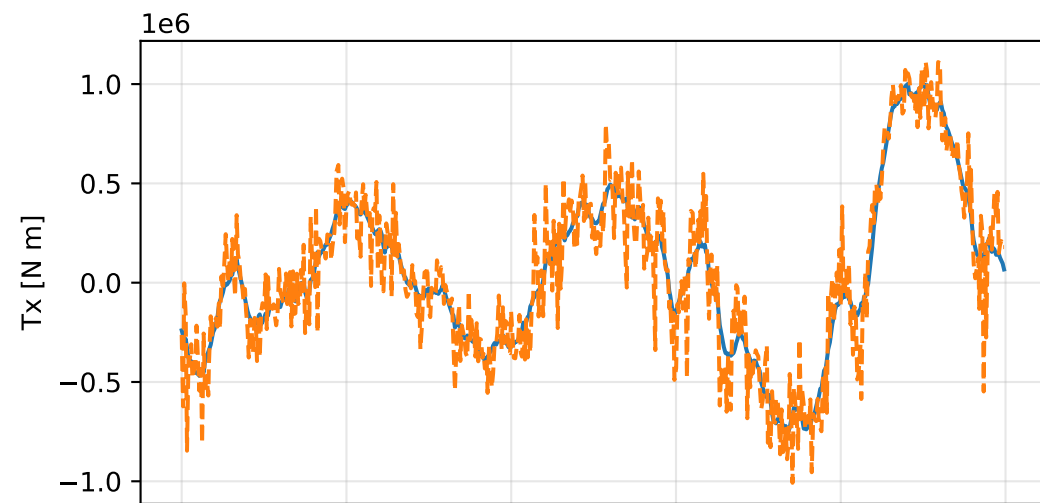
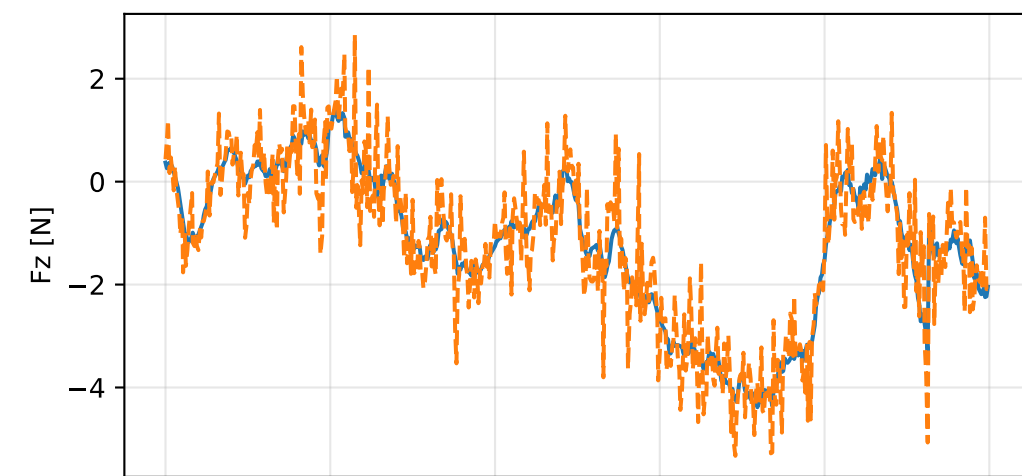


cov_full_no_R_uncertainty_in_s: trajectory

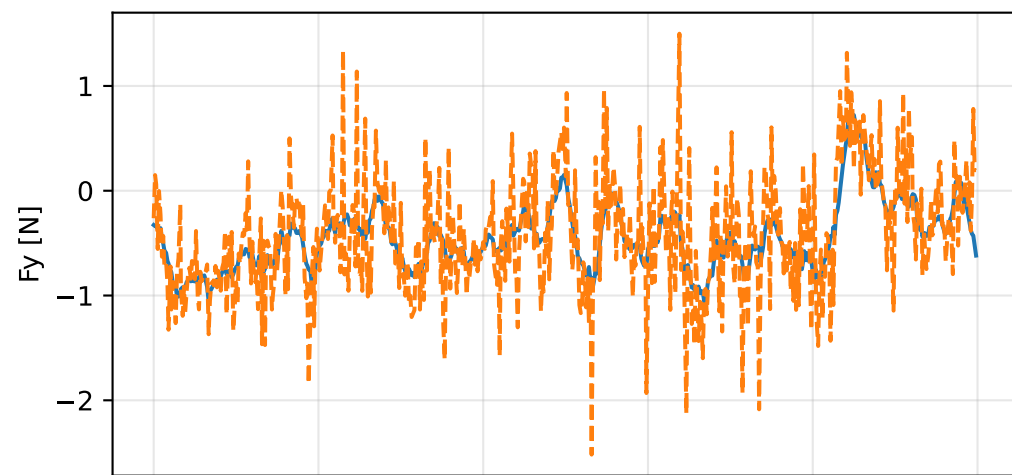


cov_full_no_R_uncertainty_in_s: residual wrench





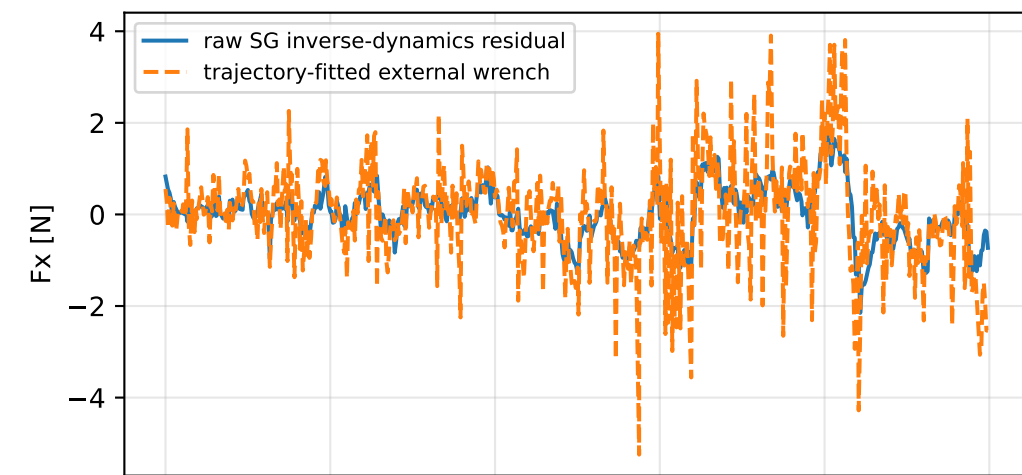


cov_full_no_R_uncertainty_in_s: measured sensor comparison

gyro

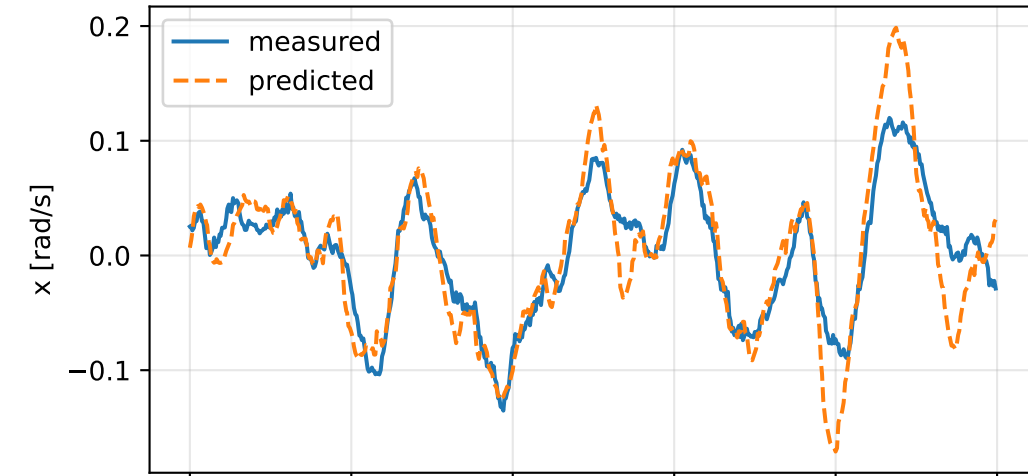

specific force

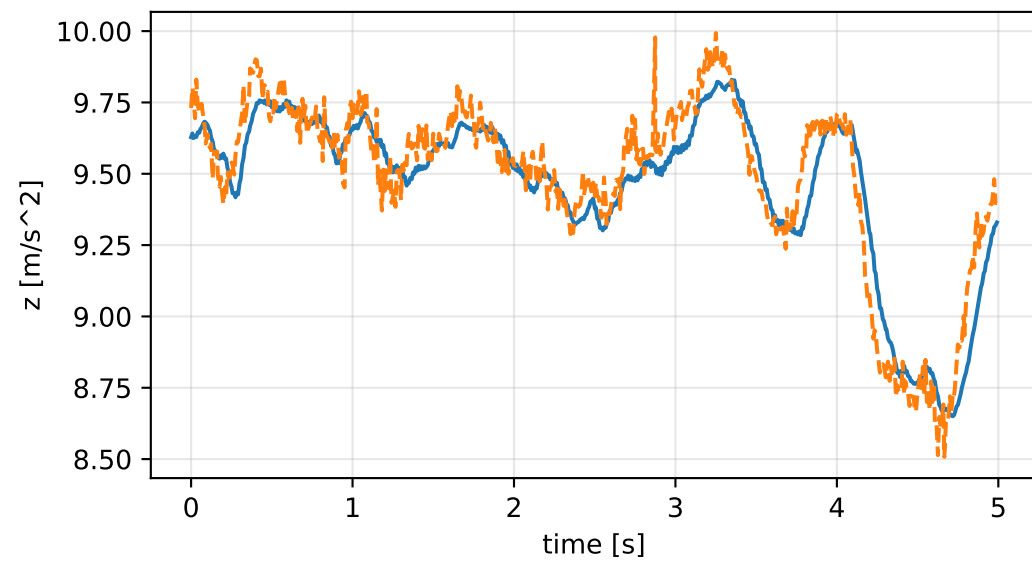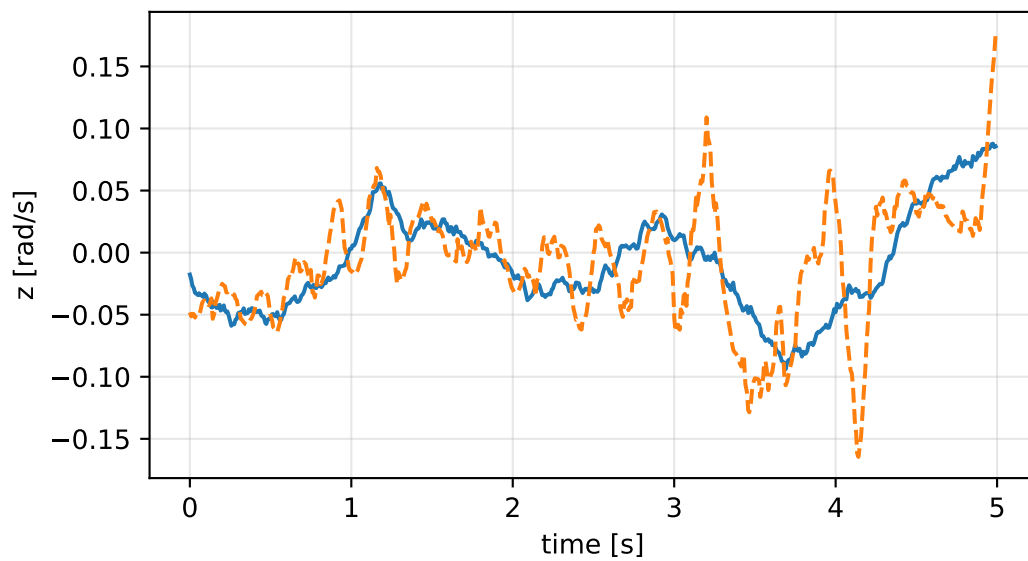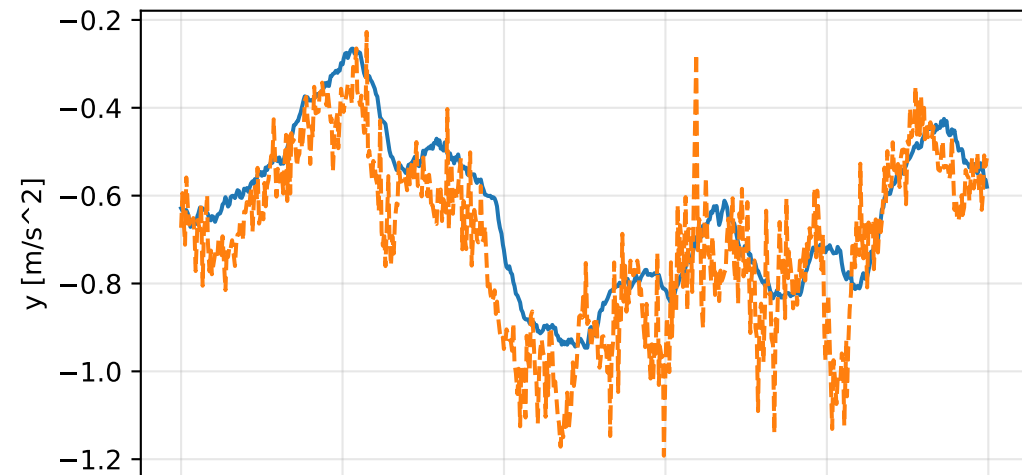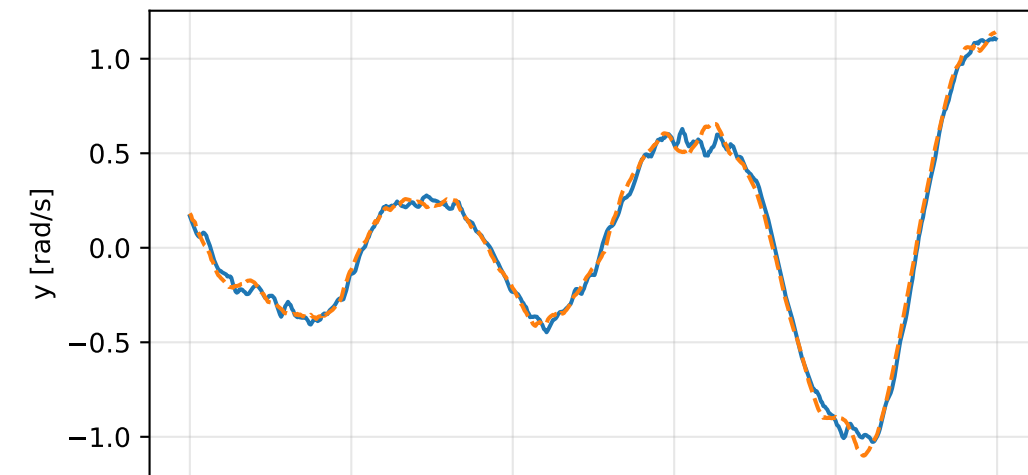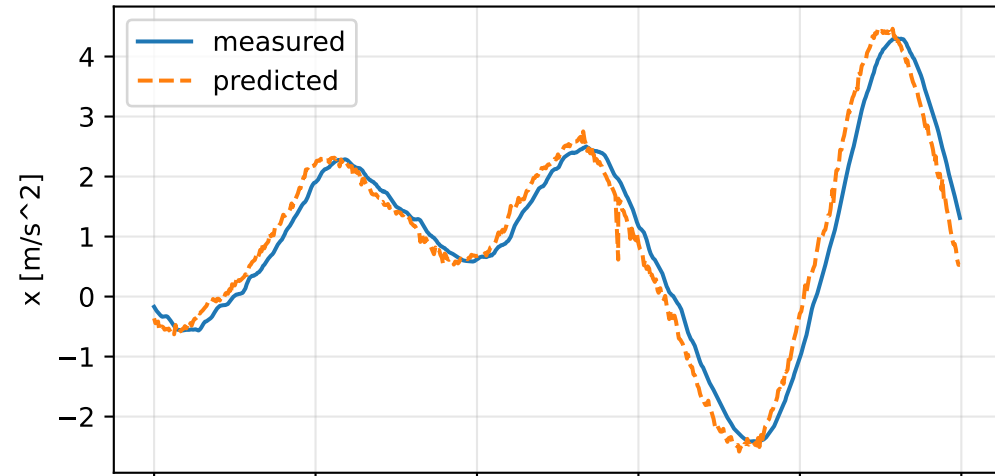

cov_full_no_R_uncertainty_in_s: nominal -> estimated parameters

Case: cov_full_no_R_uncertainty_in_s
status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 4.60131053 delta 2.24971294

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [94641.2921826 224821.0246537 -10591.779071] d=[94641.2271825 224821.0246537 -10591.779071]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [224821.0246537 535459.1732417 4448.8402983] d=[224821.0246544 535459.1732417 4448.8402983]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-10591.779071 4448.8402983 629681.2328834] d=[-10591.7790901 4448.8402983 629681.2328834]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0304883 0.169974 -0.0210864] d=[-0.0284635 0.1700040 0.0210864]

rotor force effectiveness

[1. 1. 1. 1.] -> [1.8979439e-06 1.7378118e+00 3.4034488e+00 1.7728276e+00] d=[-0.9999981 0.7378118 2.4034488 0.7728276]

rotor lag [s] 0.103144785

gimbal lag [s] 0.0435199648