

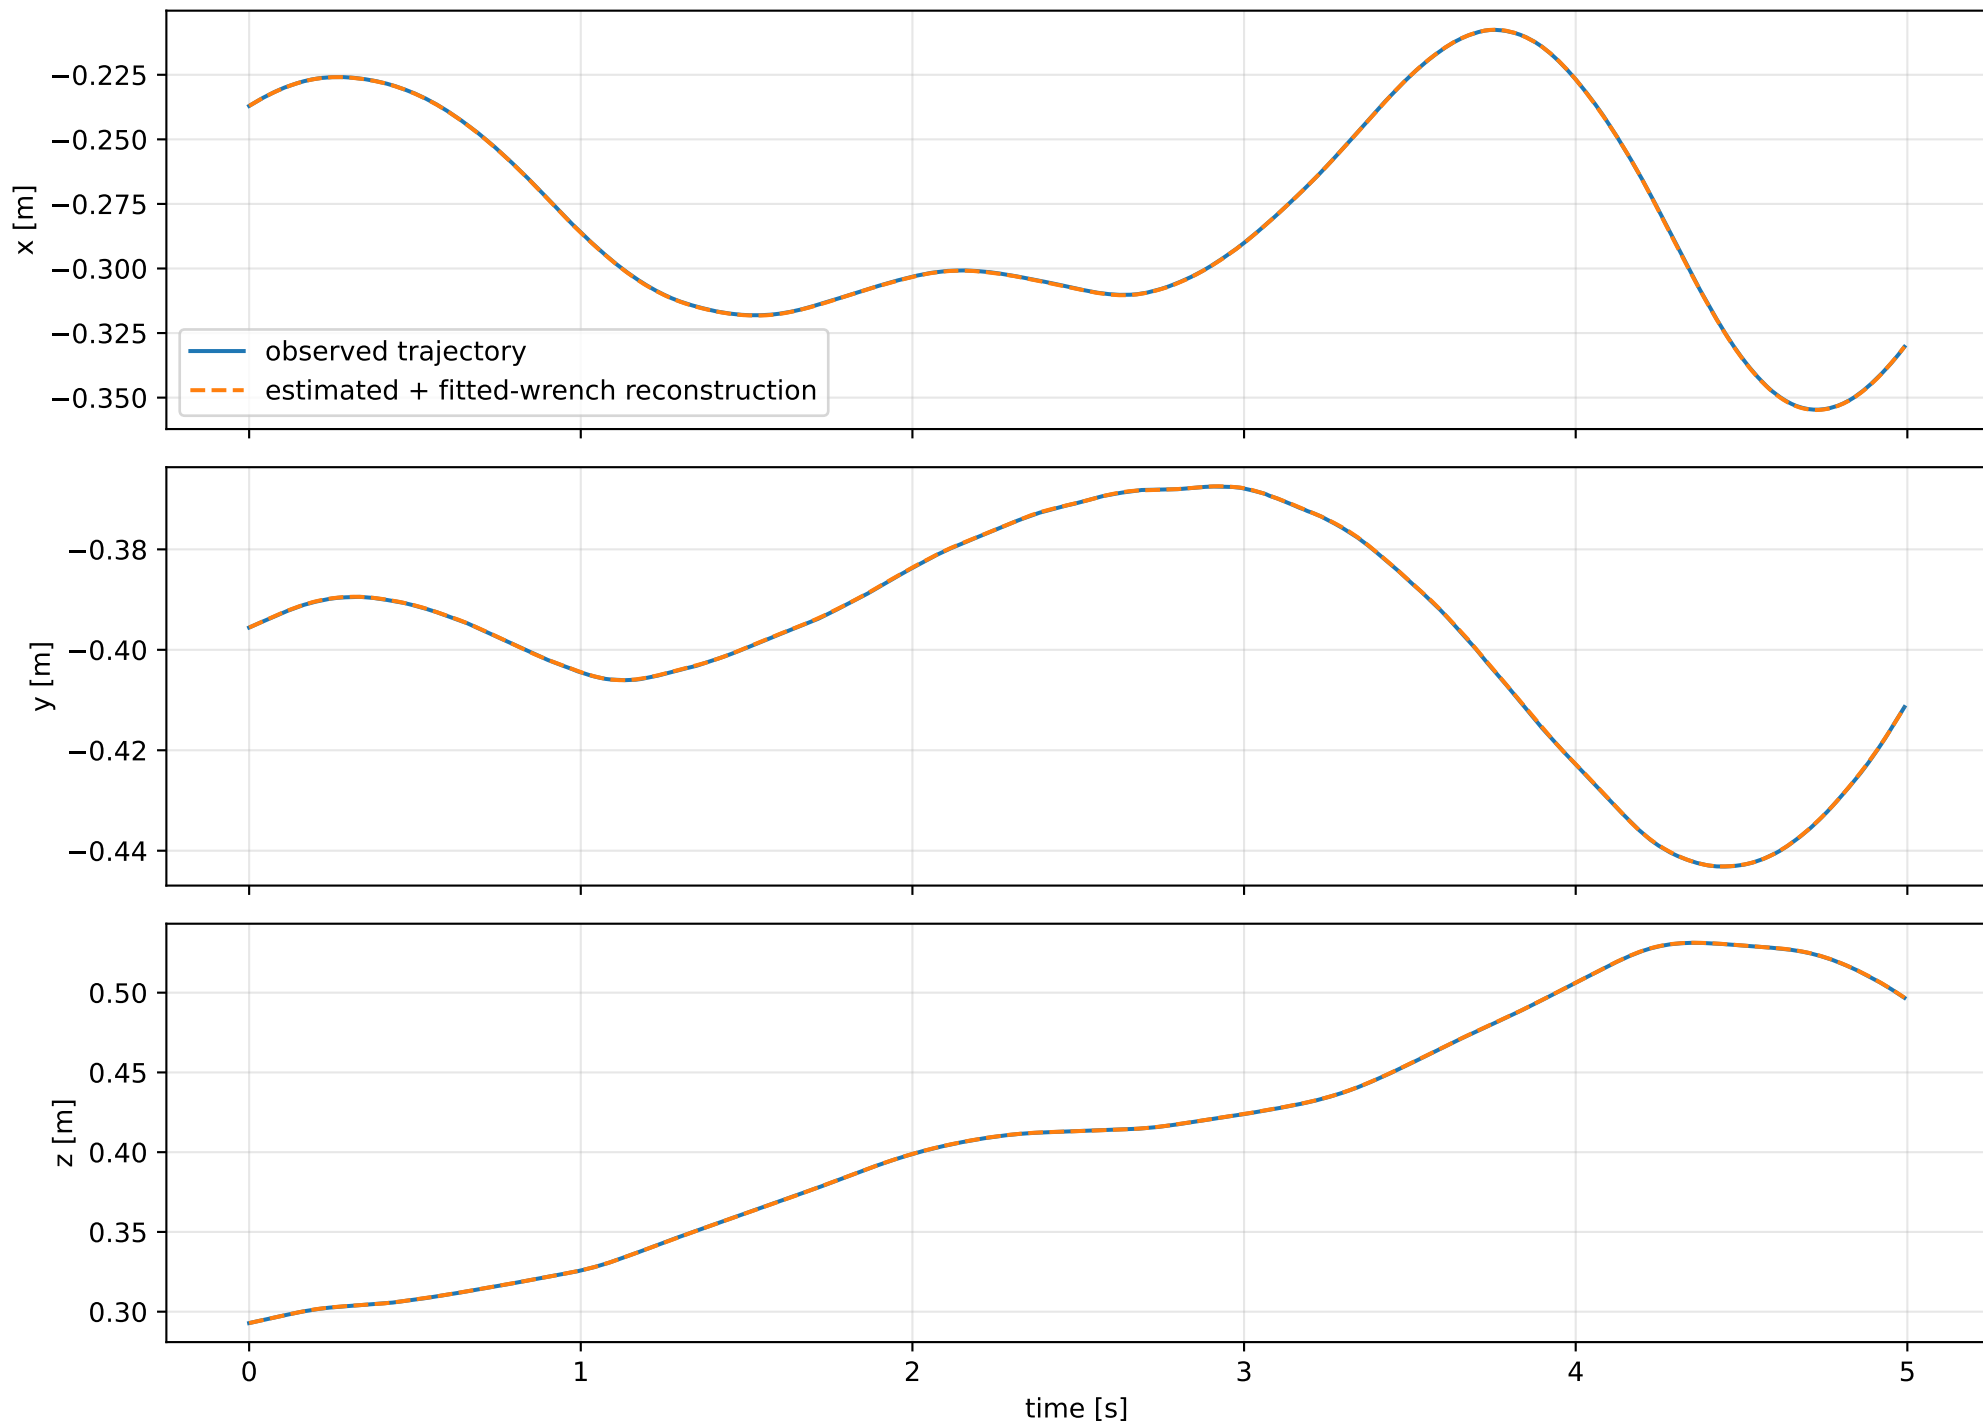
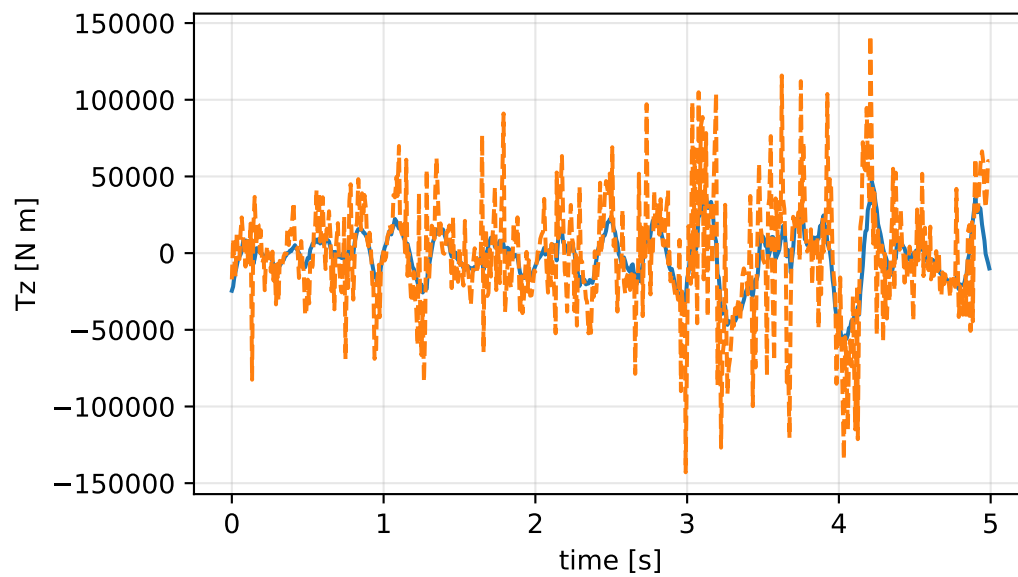
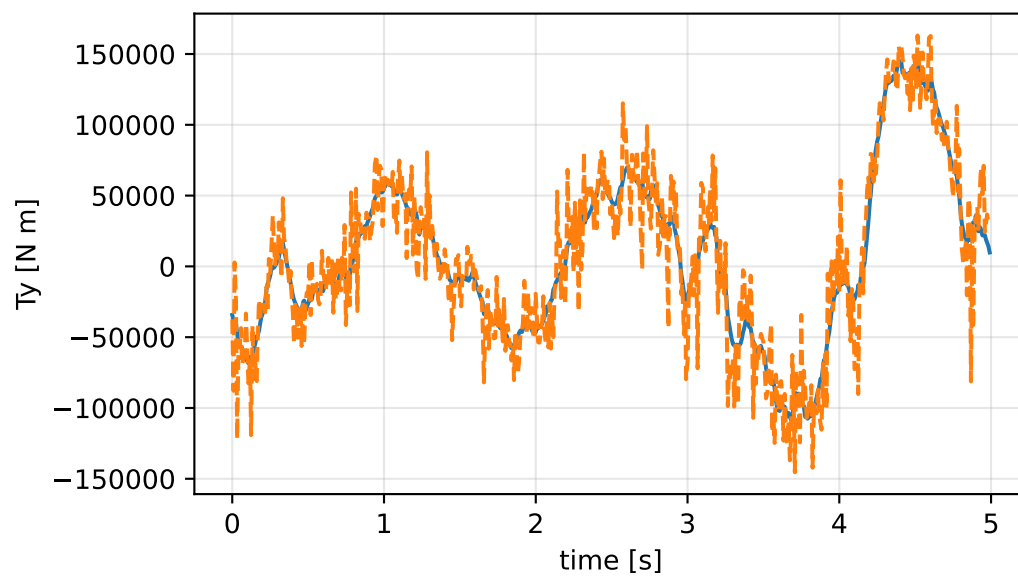
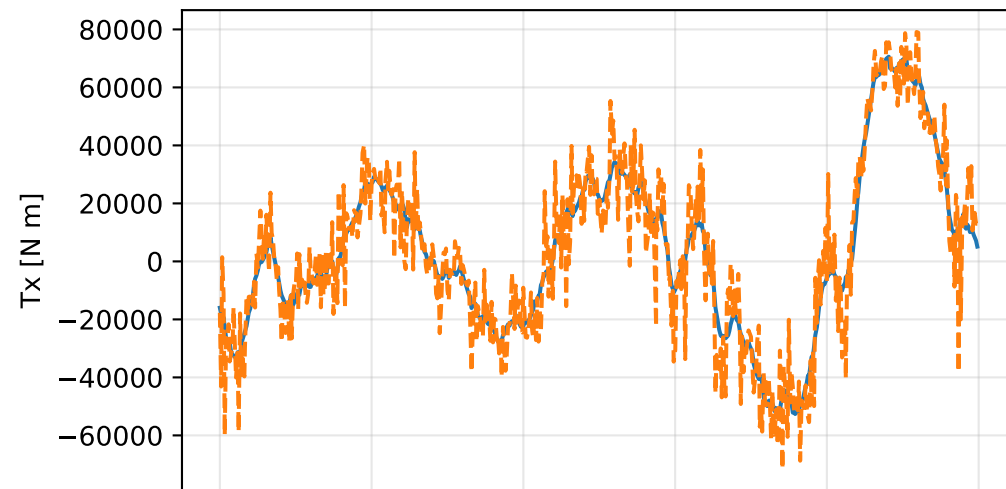
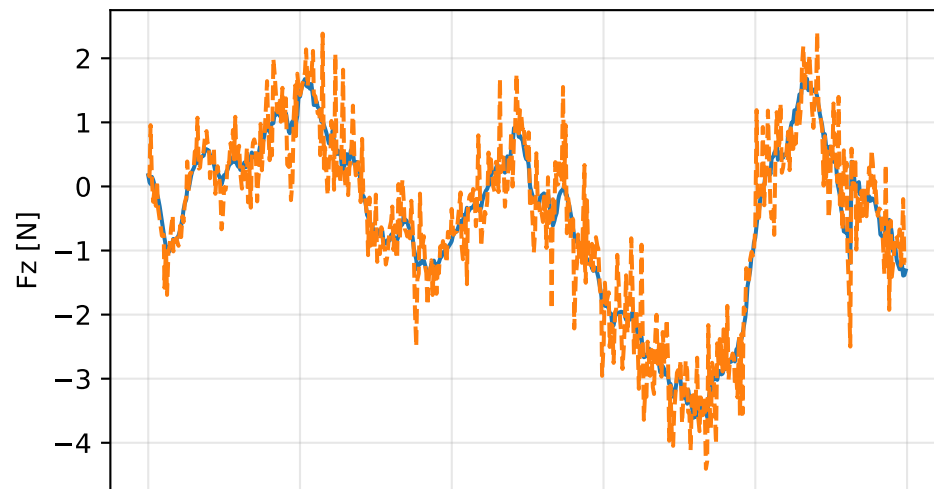


kkt_off_scale_negative: trajectory

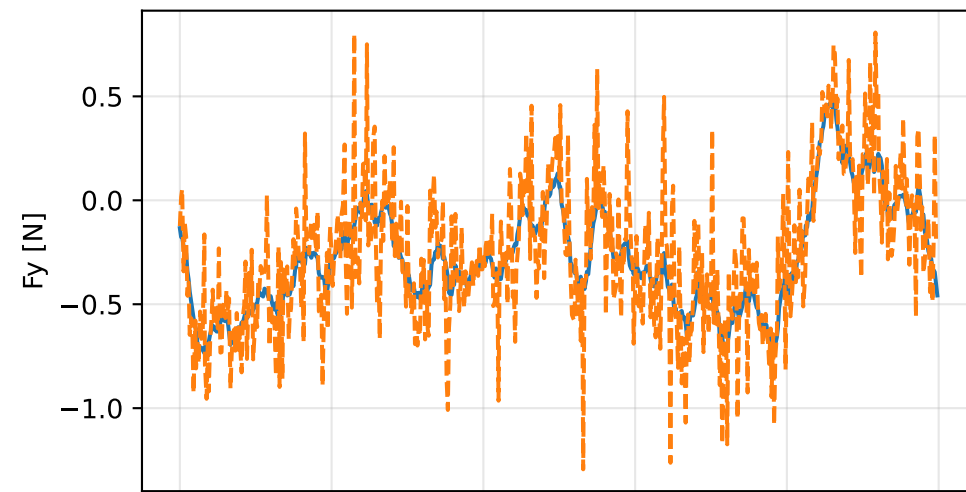


kkt_off_scale_negative: residual wrench

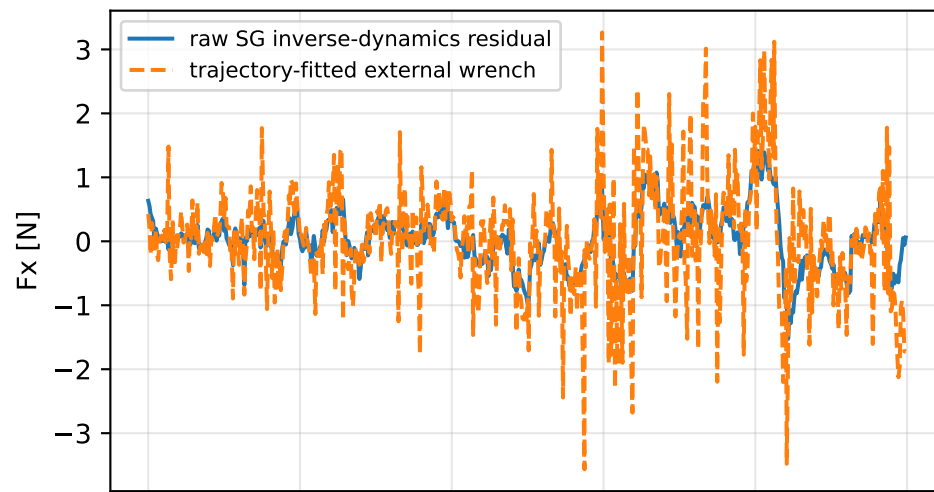


kkt_off_scale_negative: measured sensor comparison

gyro

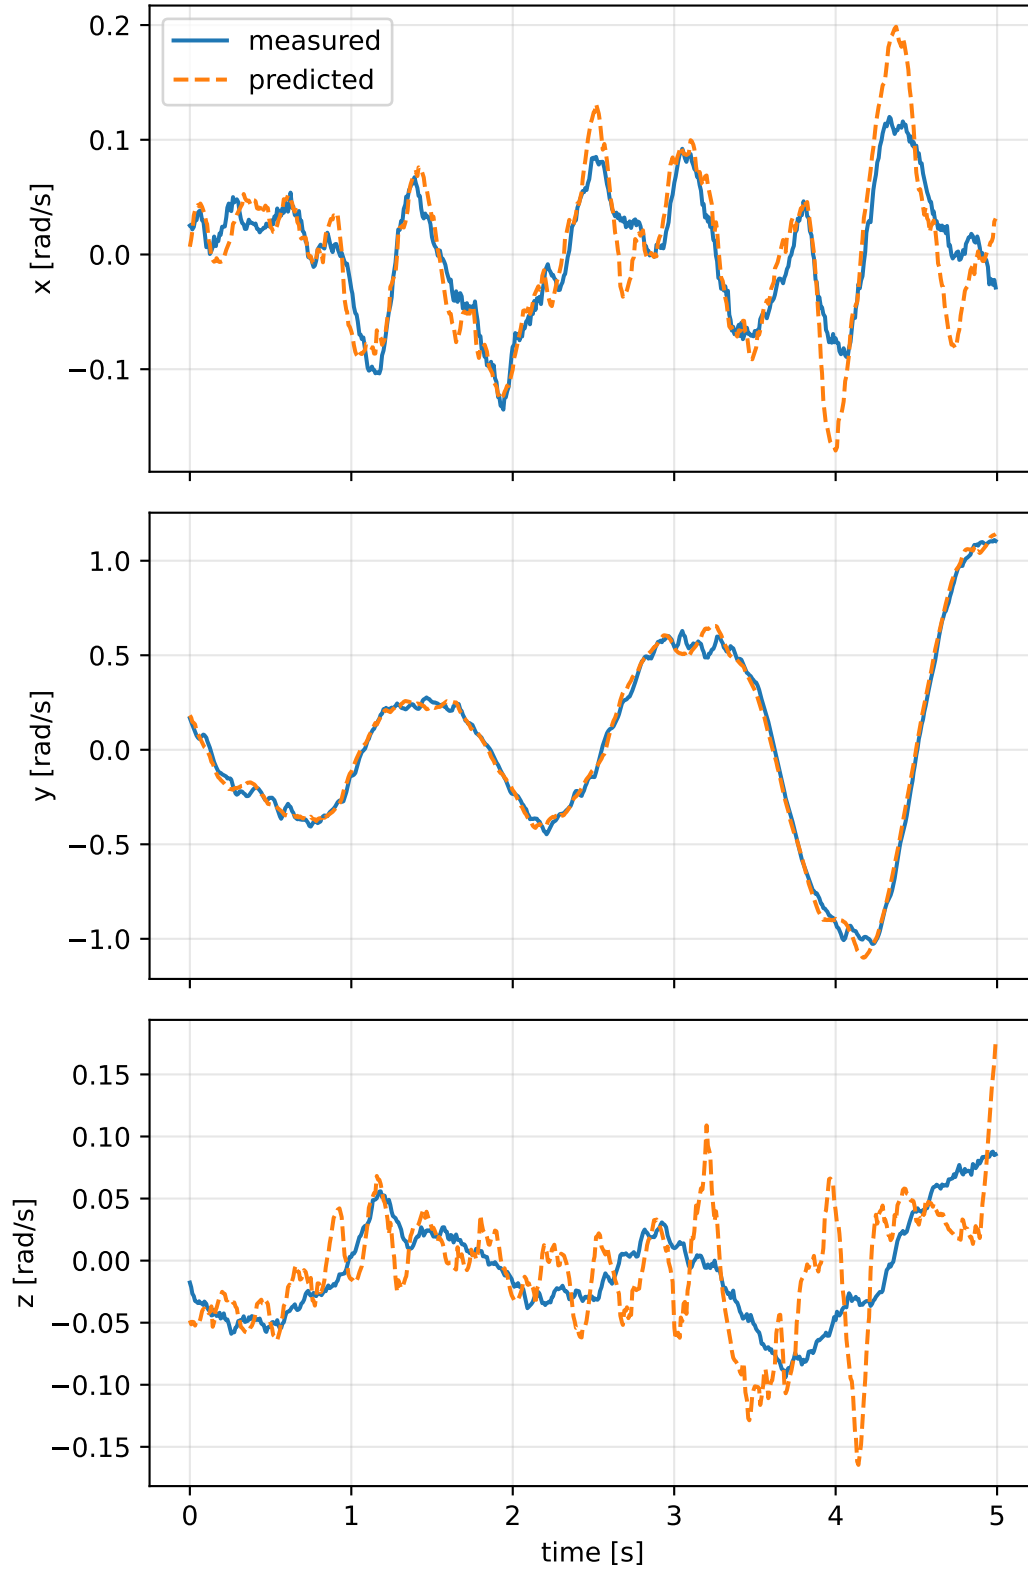

specific force

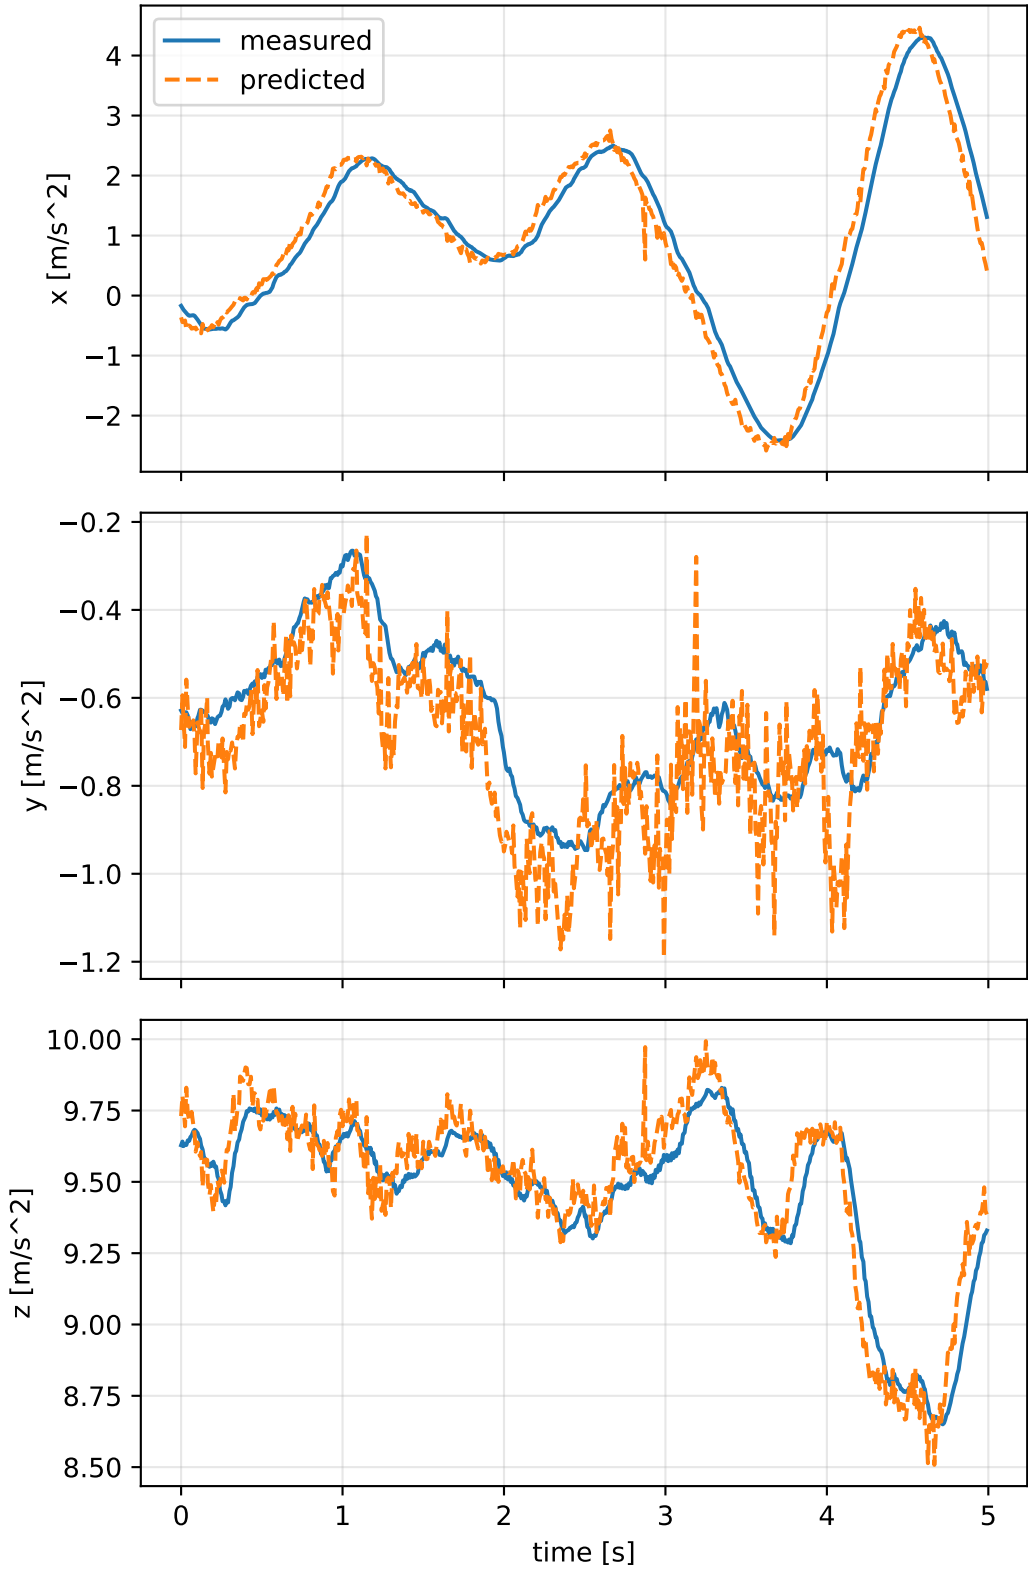

kkt_off_scale_negative: nominal -> estimated parameters

Case: kkt_off_scale_negative

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 3.1949181 delta 0.843320513

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [7806.2988143 15941.3902696 -987.428795] d=[7806.2338143 15941.3902696
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [15941.3902696 32709.1232698 481.6628133] d=[15941.3902703 32709.0583333
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-987.428795 481.6628133 40455.7217625] d=[-987.428814 481.6628133

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0889955 0.2009706 -0.0259699] d=[-0.0869708 0.2010012

rotor force effectiveness

[1. 1. 1. 1.] -> [6.3951142e-06 1.3928669e+00 2.3924633e+00 9.9289740e-01] d=[-0.9999936 0.3928669 1.3924633 -0.0071020

rotor lag [s] 0.103122845

gimbal lag [s] 0.0403628742