

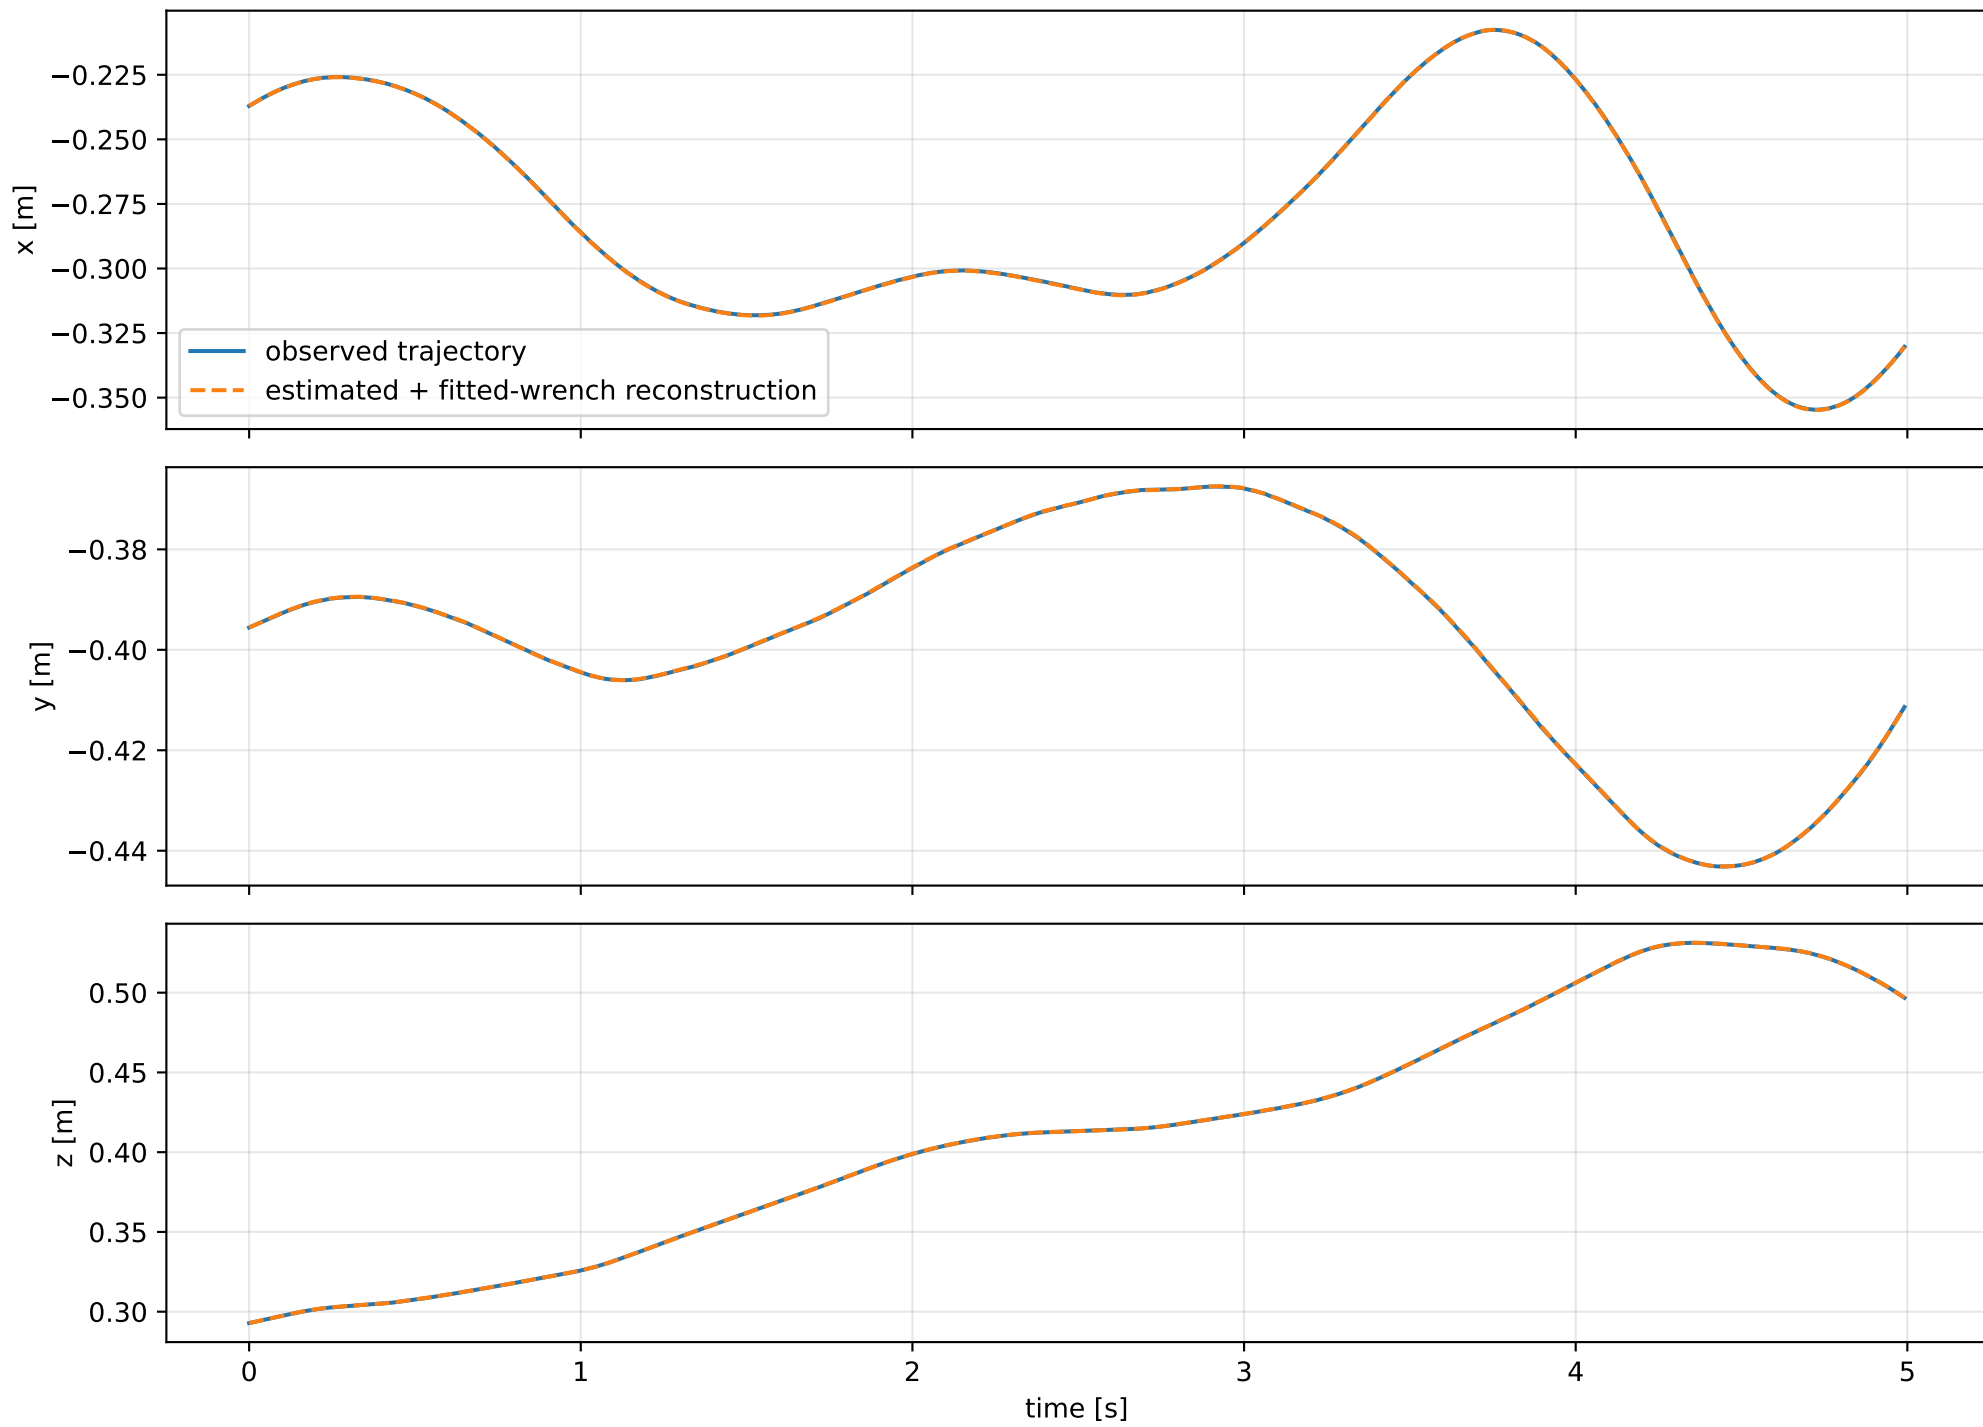
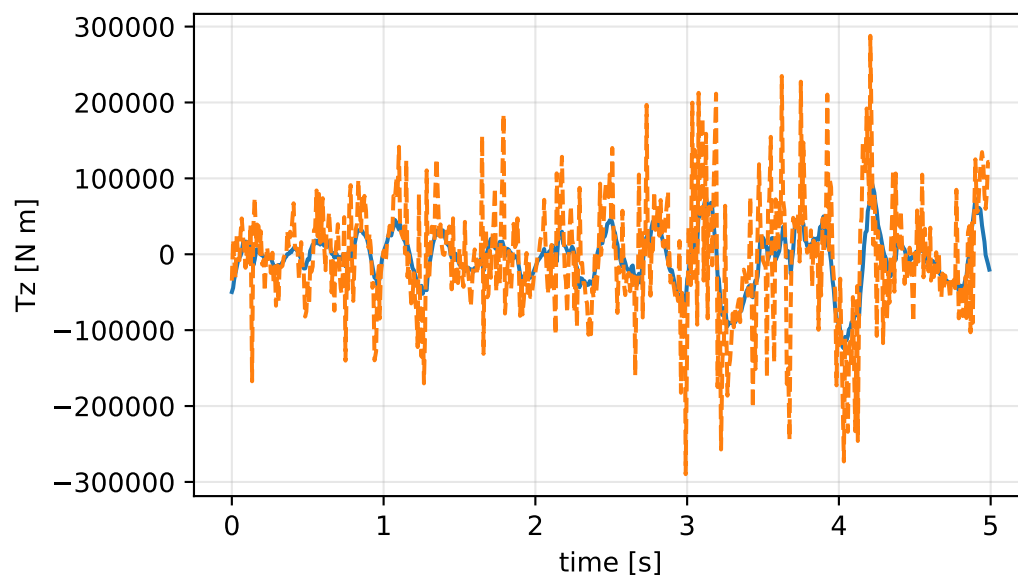
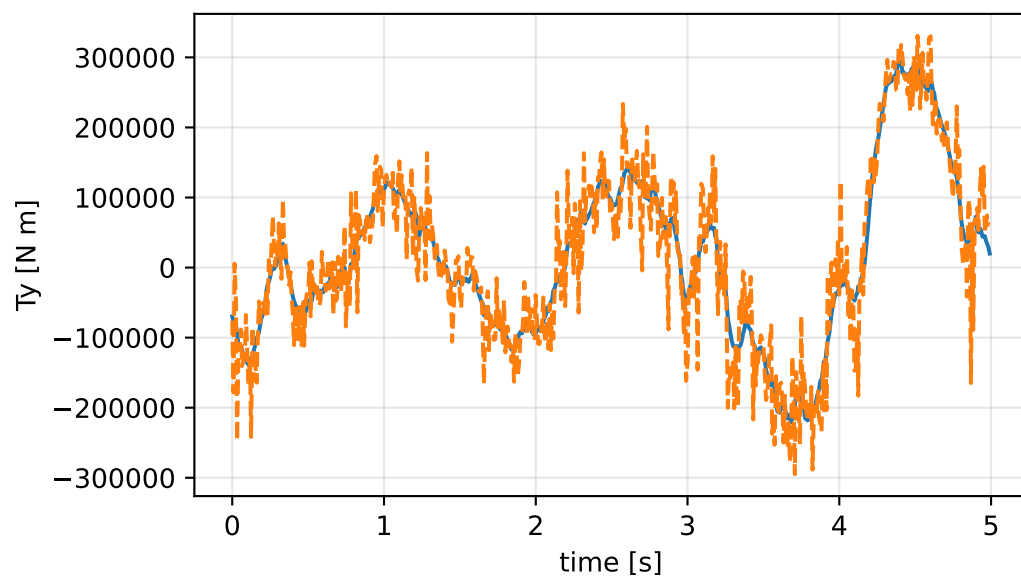
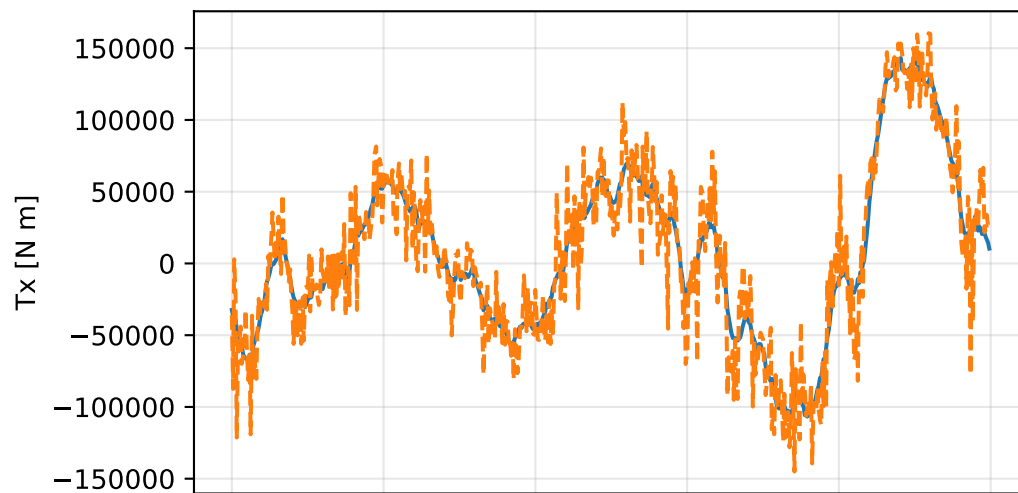
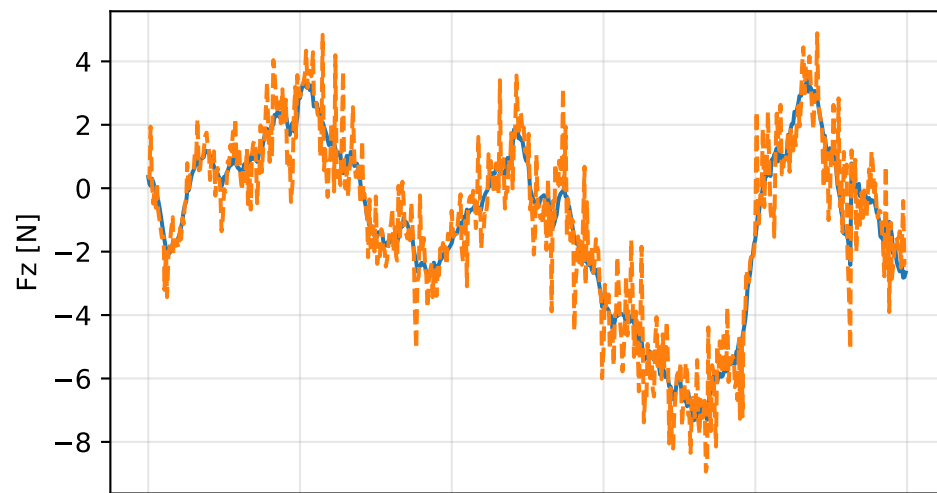



kkt_off_scale_positive: trajectory

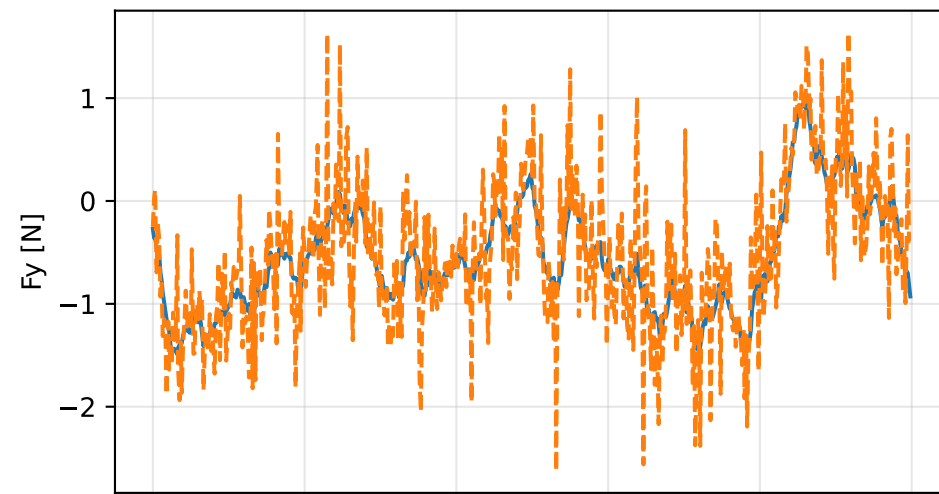

kkt_off_scale_positive: residual wrench

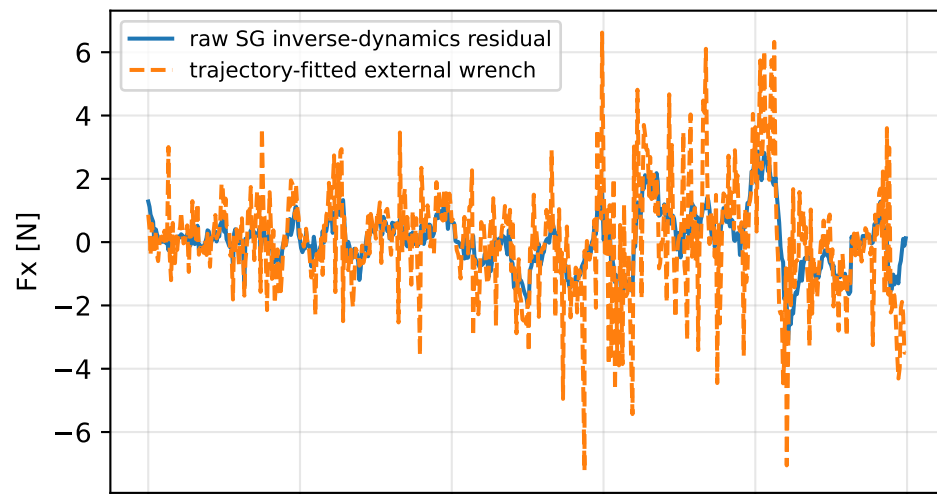

kkt_off_scale_positive: measured sensor comparison

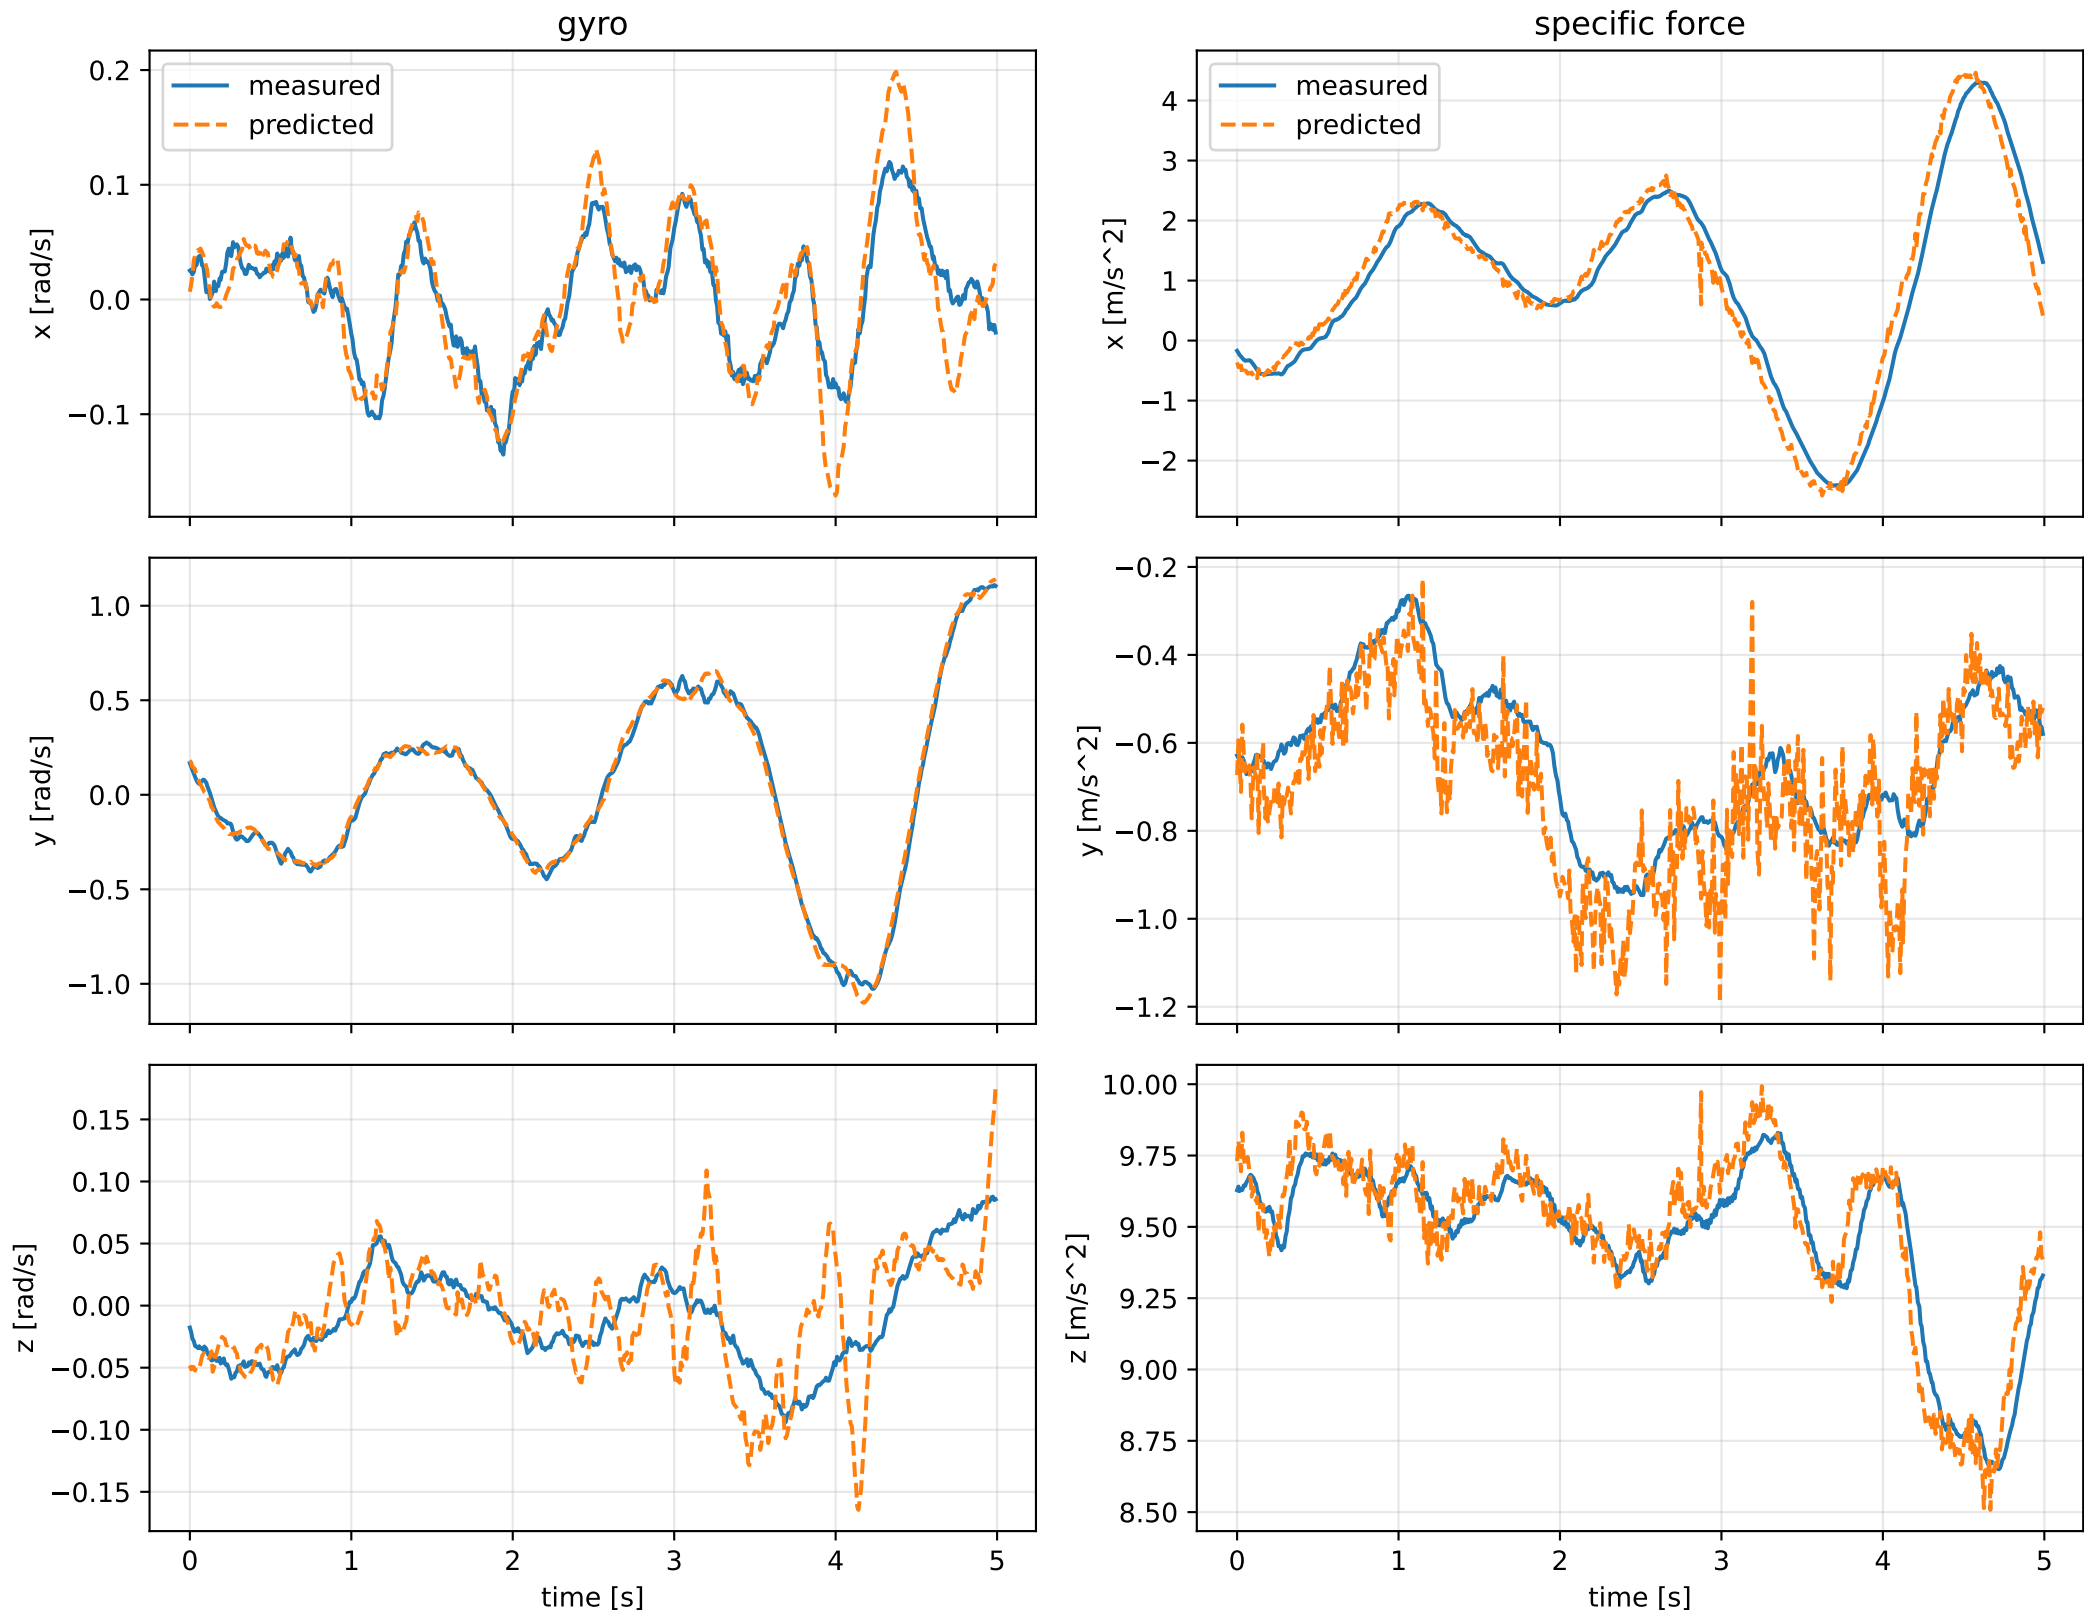

kkt_off_scale_positive: nominal -> estimated parameters

Case: kkt_off_scale_positive

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 6.47966127 delta 4.12806368

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [15832.0708151 32330.9708789 -2002.6190361] d=[15832.005815 32330.9708789
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [32330.9708789 66337.8597491 976.8675208] d=[32330.9708796 66337.7947491
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-2002.6190361 976.8675208 82048.8514532] d=[-2002.6190551 976.8675208

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0889955 0.2009706 -0.0259699] d=[-0.0869708 0.2010012

rotor force effectiveness

[1. 1. 1. 1.] -> [1.2970027e-05 2.8248942e+00 4.8521906e+00 2.0137101e+00] d=[-0.999987 1.8248942 3.8521906 1.0137101

rotor lag [s] 0.103122845

gimbal lag [s] 0.0403628742