



lag_common_estimated: trajectory

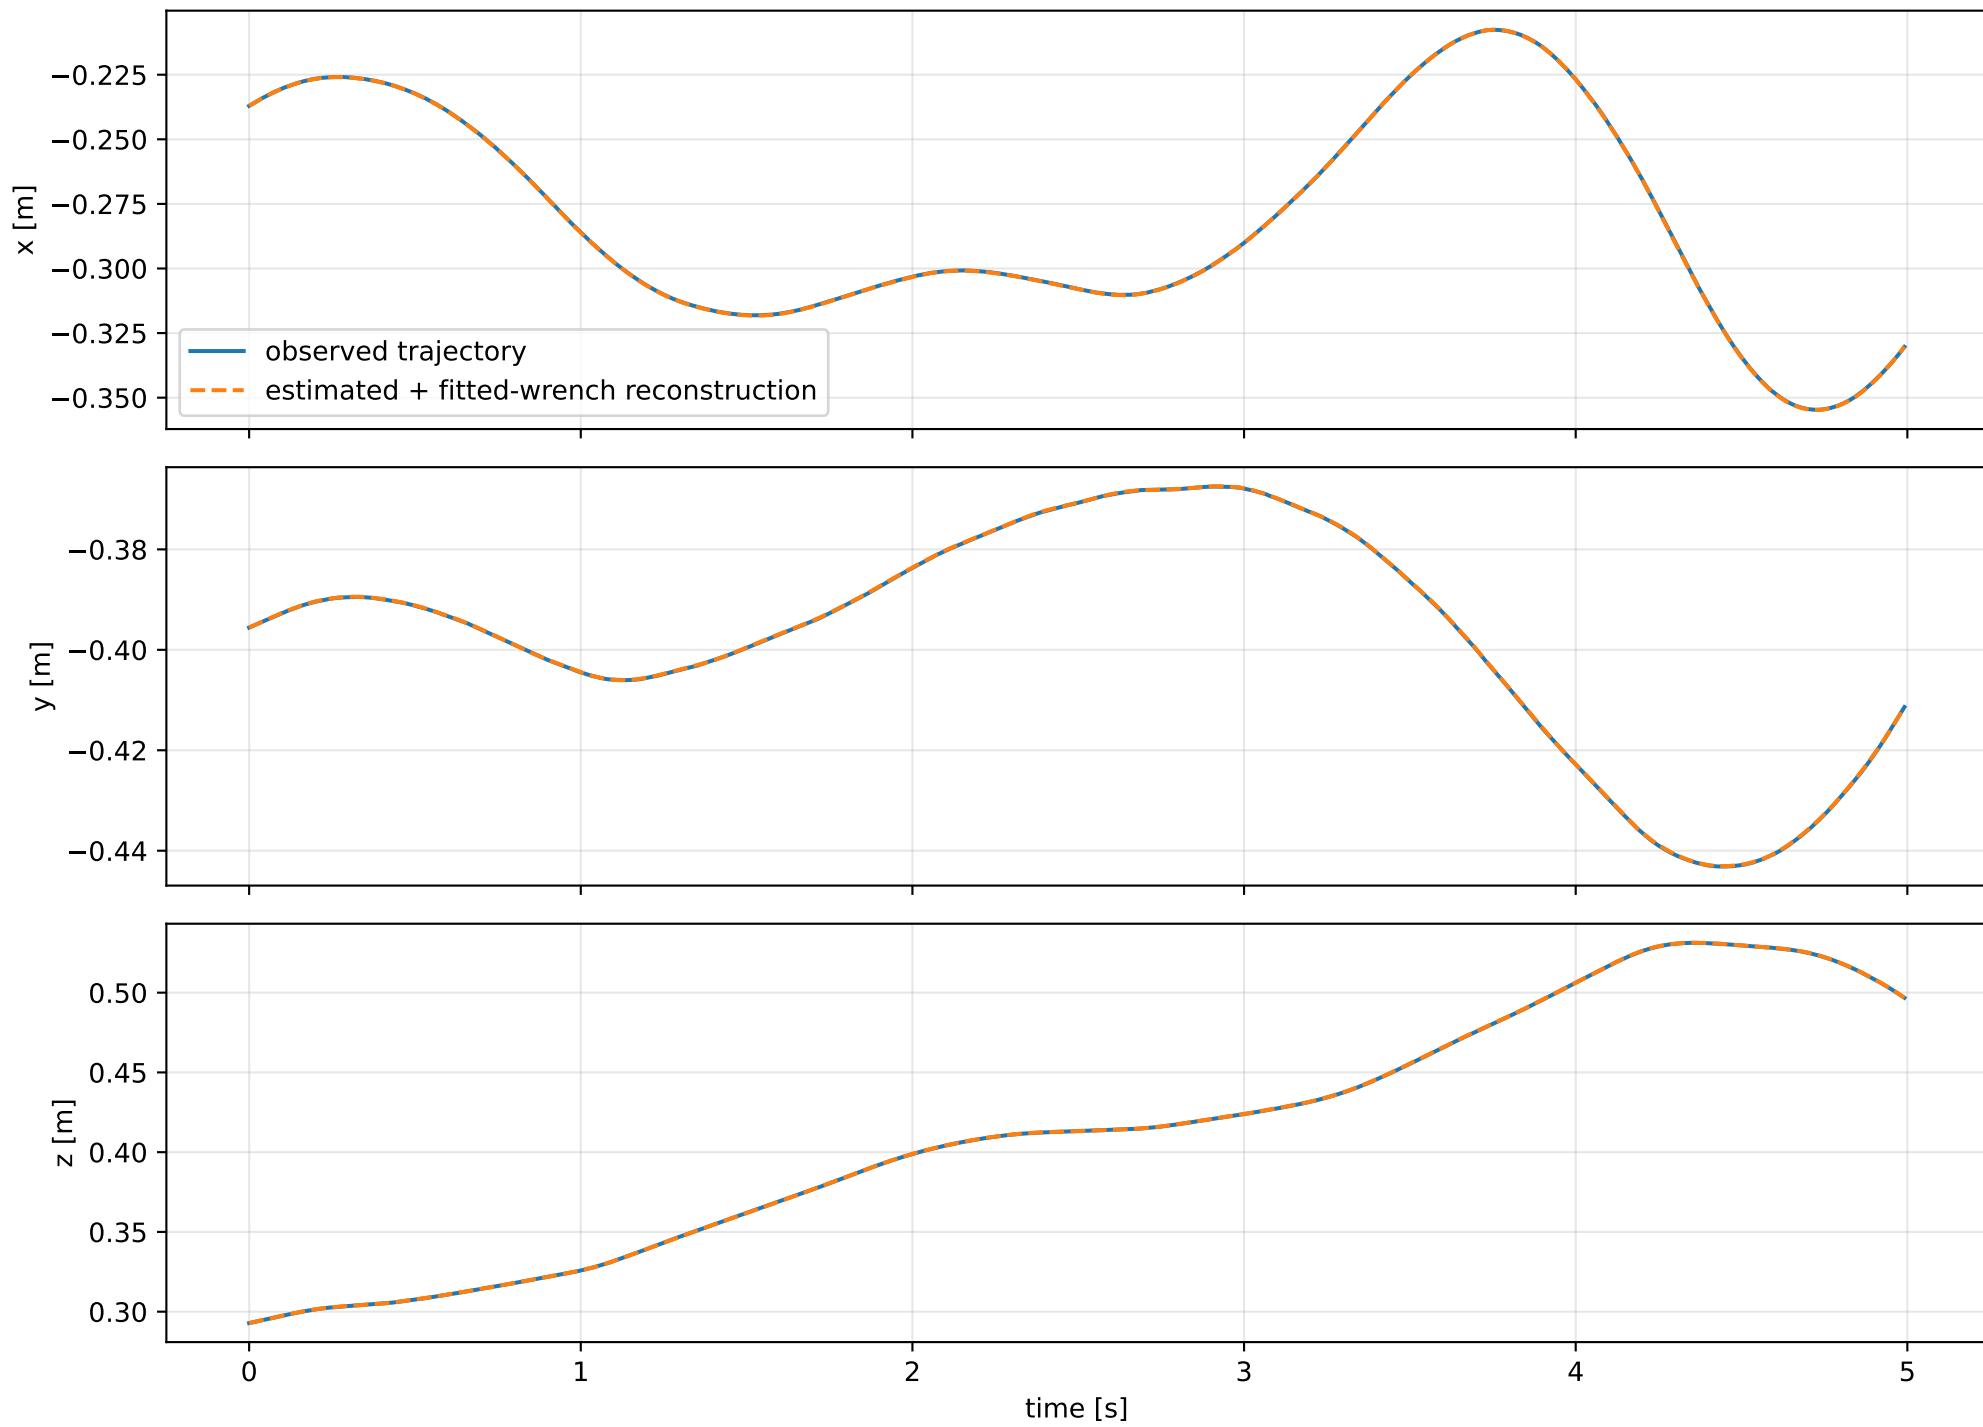


lag_common_estimated: residual wrench





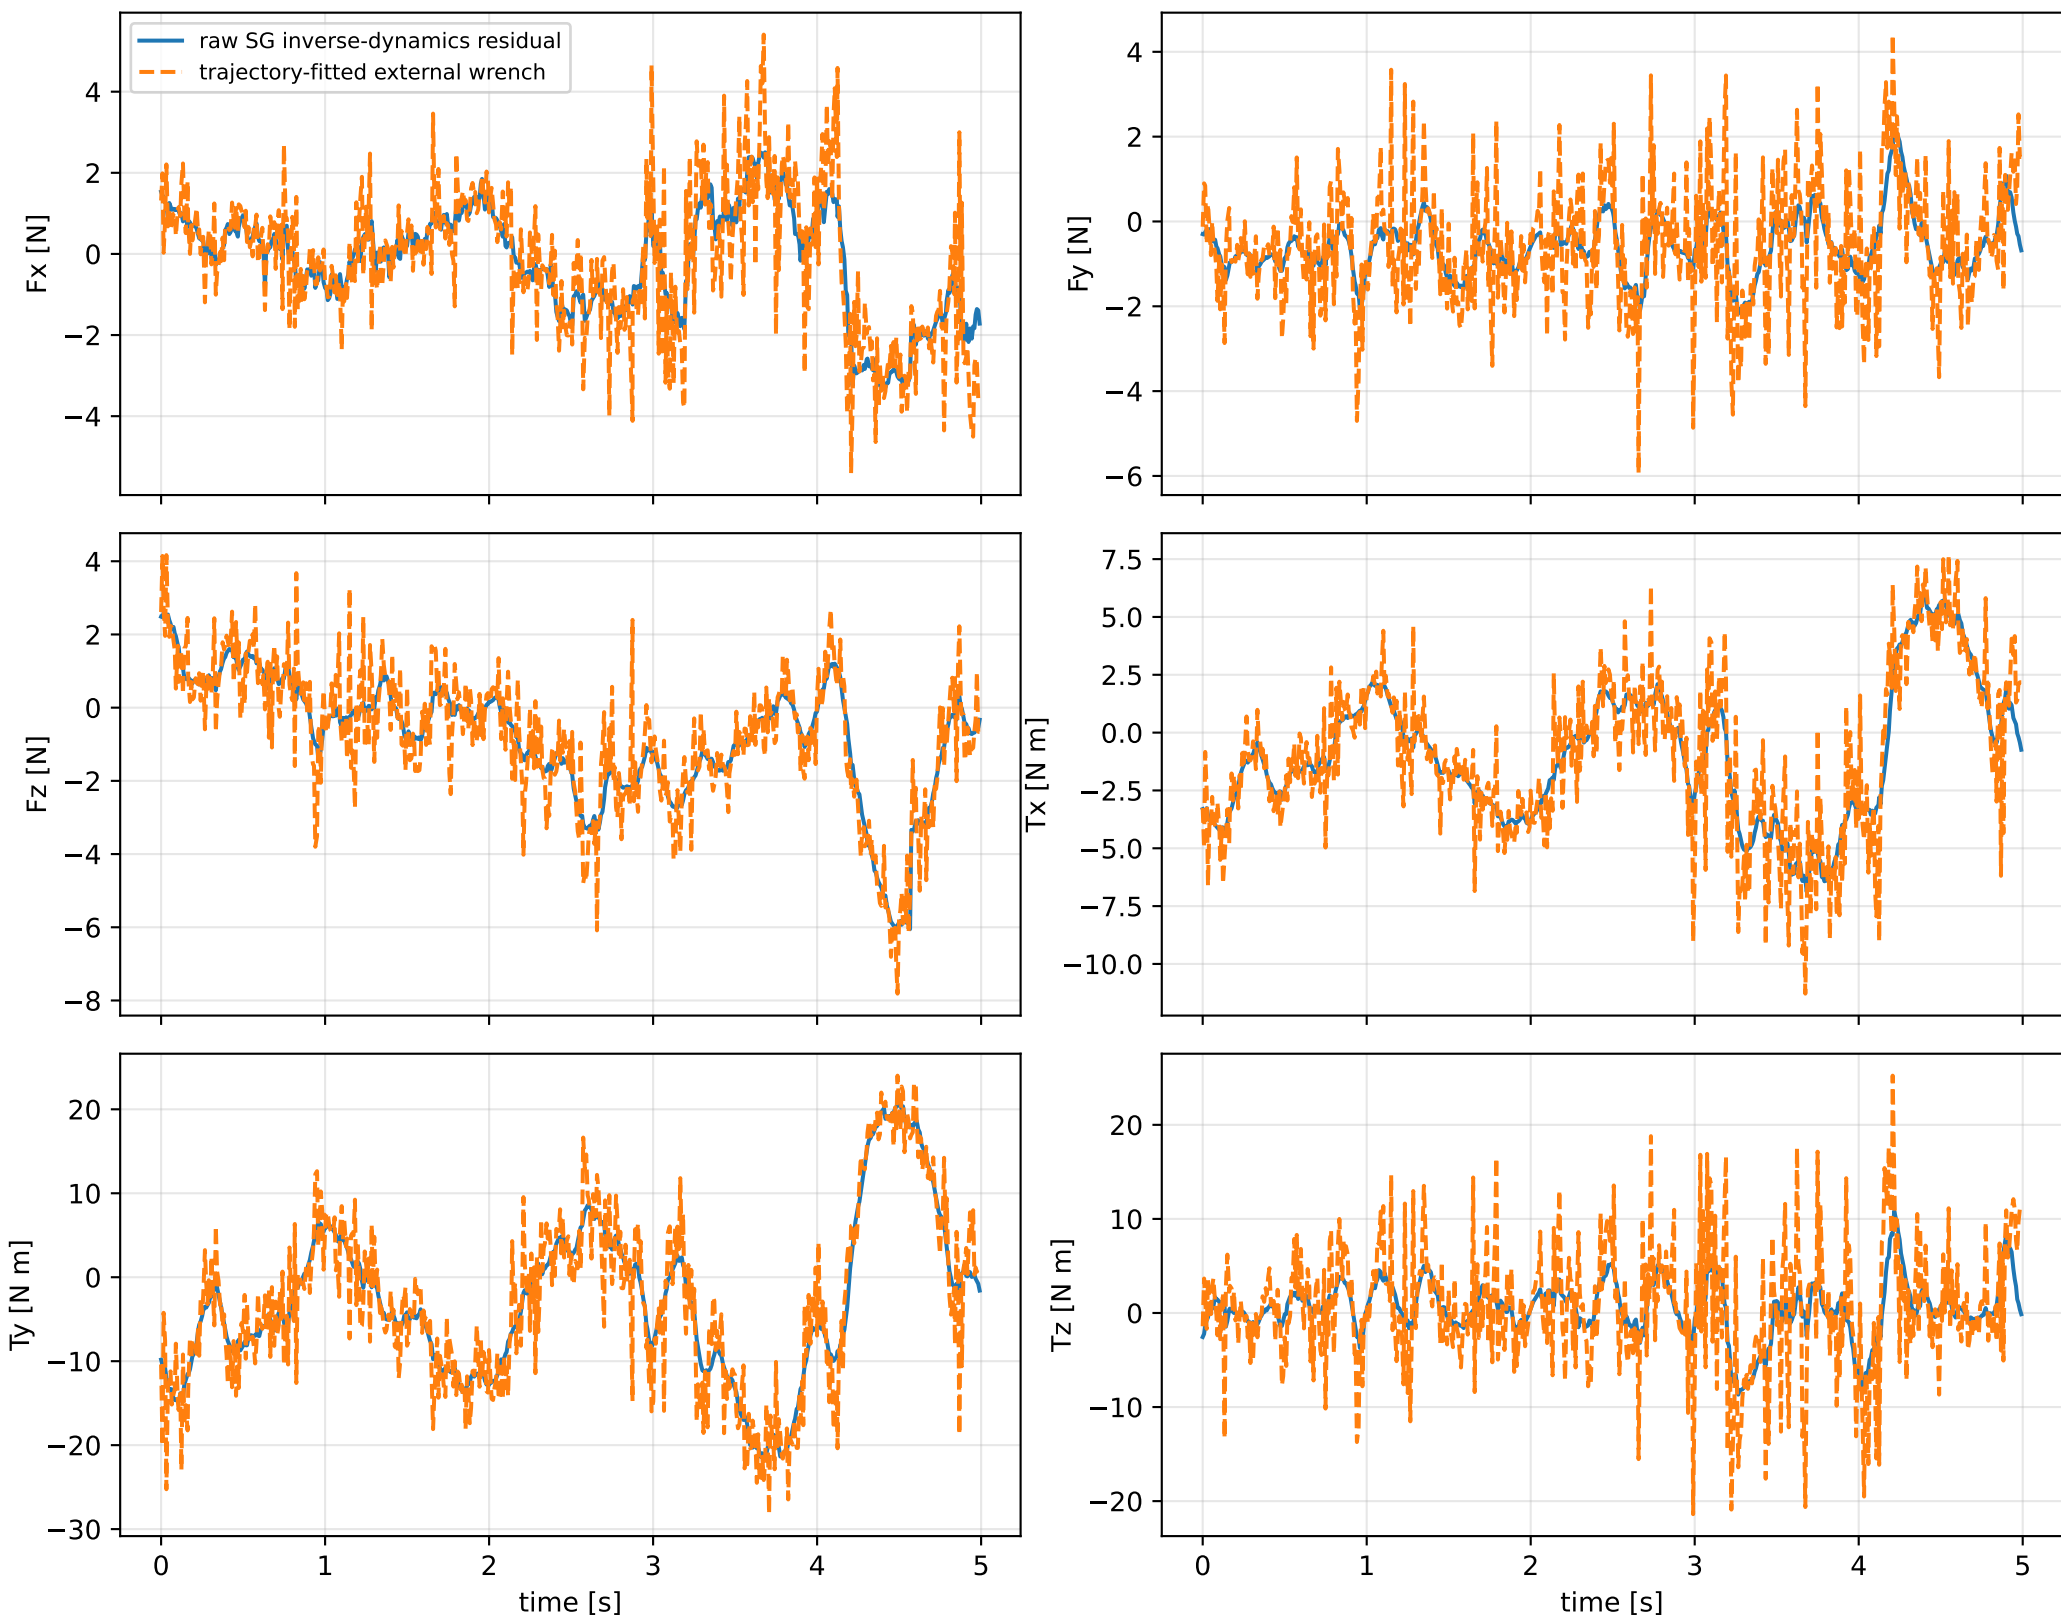


lag_common_estimated: measured sensor comparison

gyro

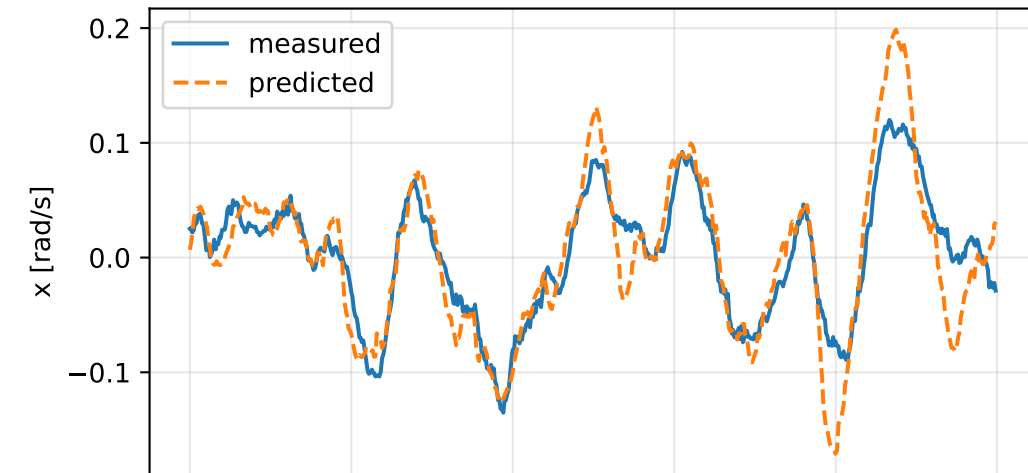

specific force

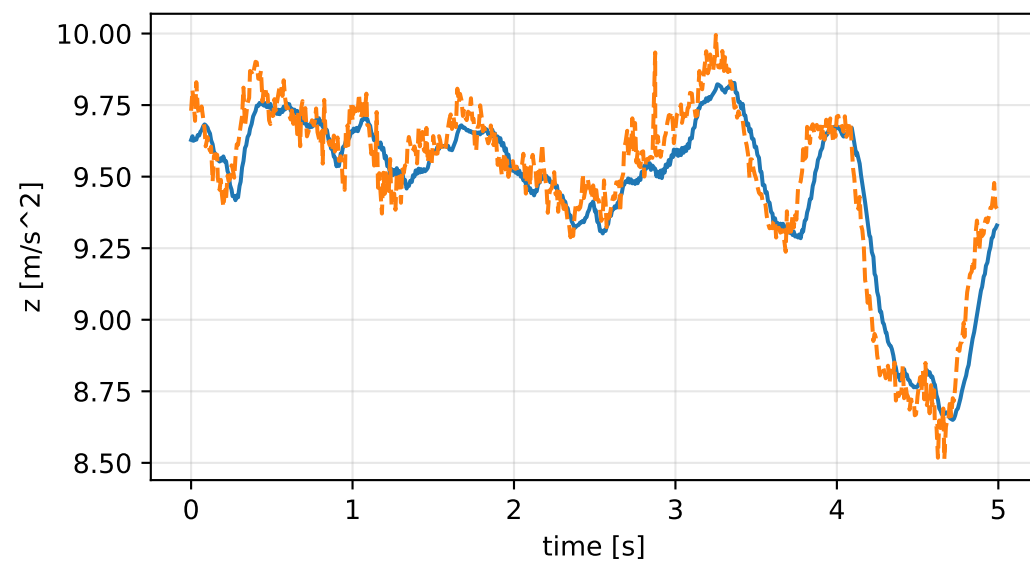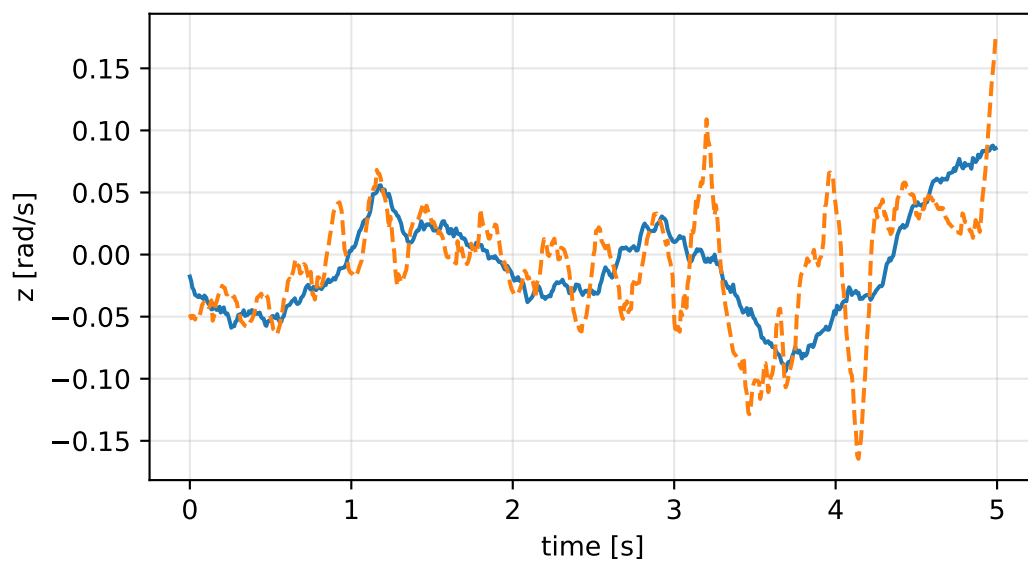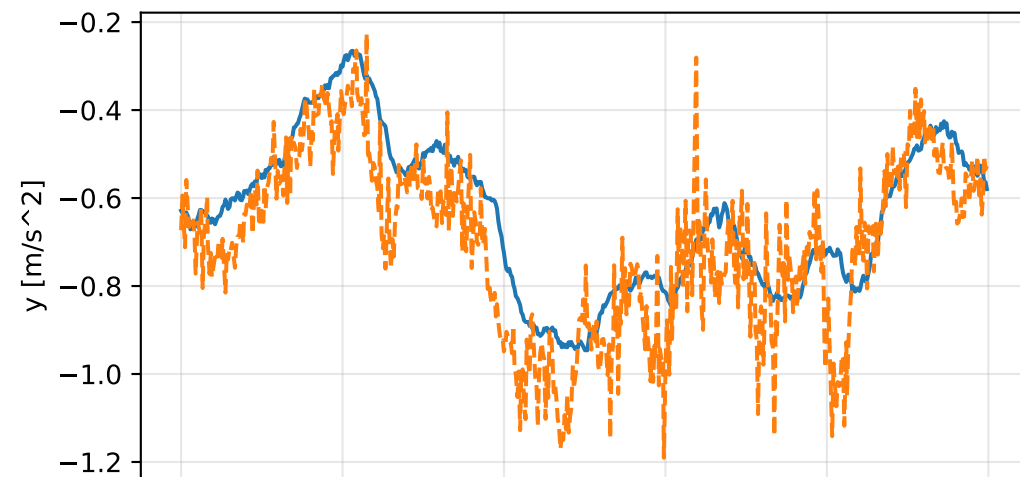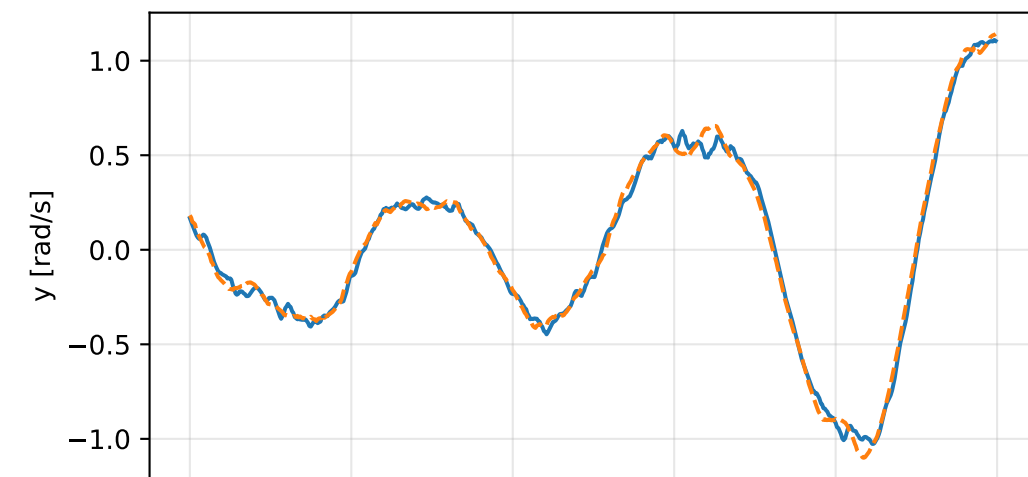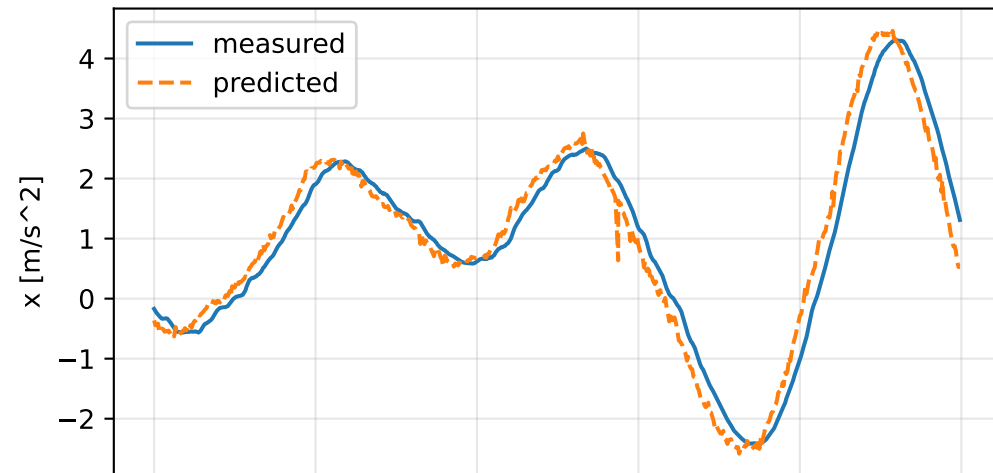

lag_common_estimated: nominal -> estimated parameters

Case: lag_common_estimated

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 4.82762978 delta 2.47603219

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.8853466 1.6071995 1.10742] d=[0.8203465 1.6072002 1.107401]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [1.6071995 5.9047662 -0.3045577] d=[1.6072002 5.8398135 -0.3045577]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [1.10742 -0.3045577 6.35832] d=[1.107401 -0.3045577 6.2293279]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [0.1126335 0.1400641 -0.1308301] d=[0.1146582 0.1400940]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.1035803 0.9563988 3.3222245 2.7250979] d=[-0.8964197 -0.0436012 2.3222245 1.7250979]

rotor lag [s] 0.0435381445

gimbal lag [s] 0.0435381445