

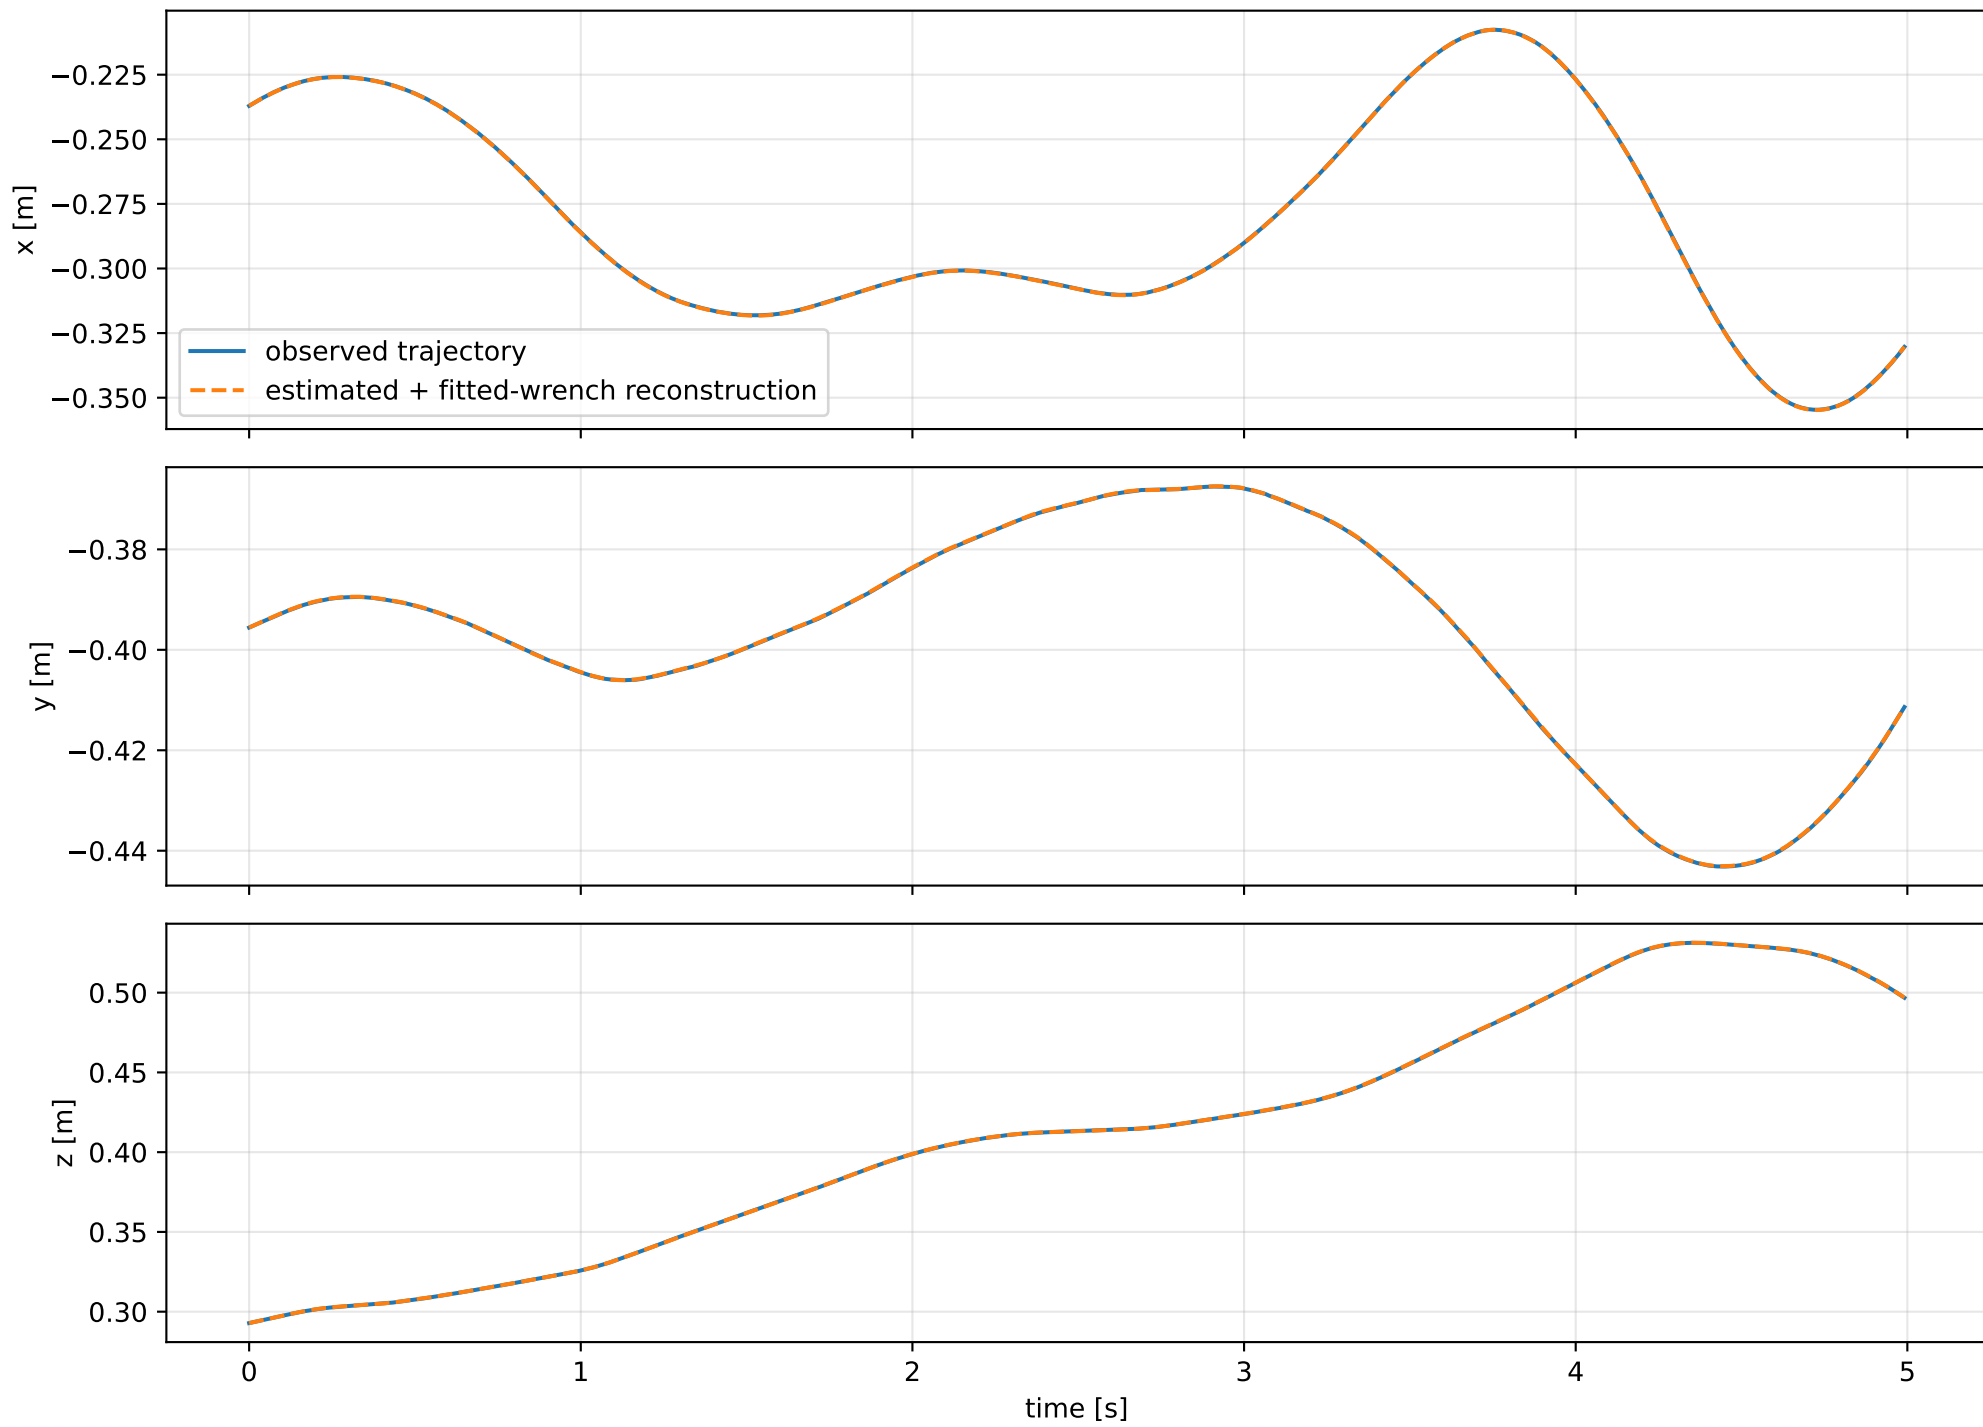
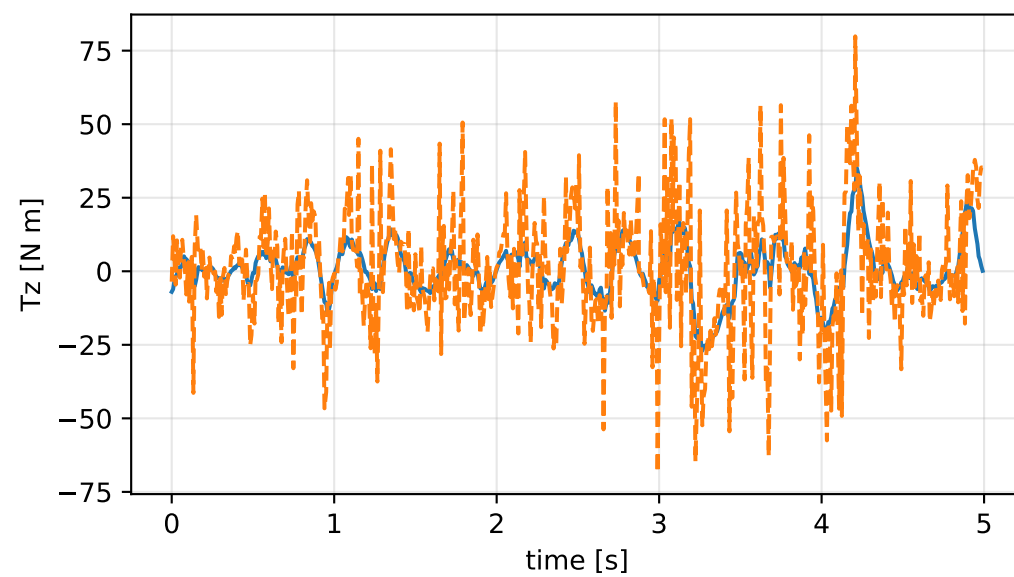
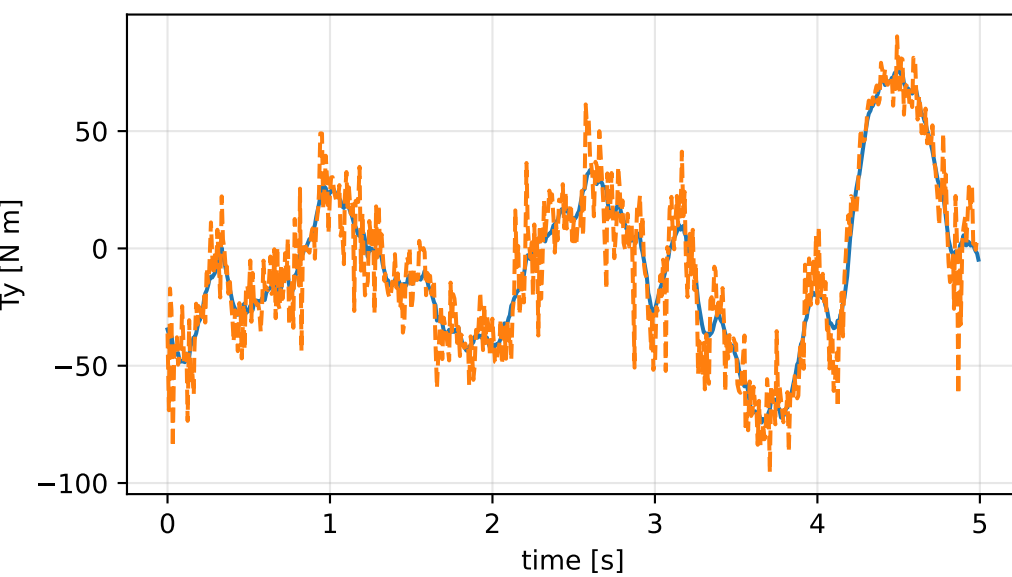
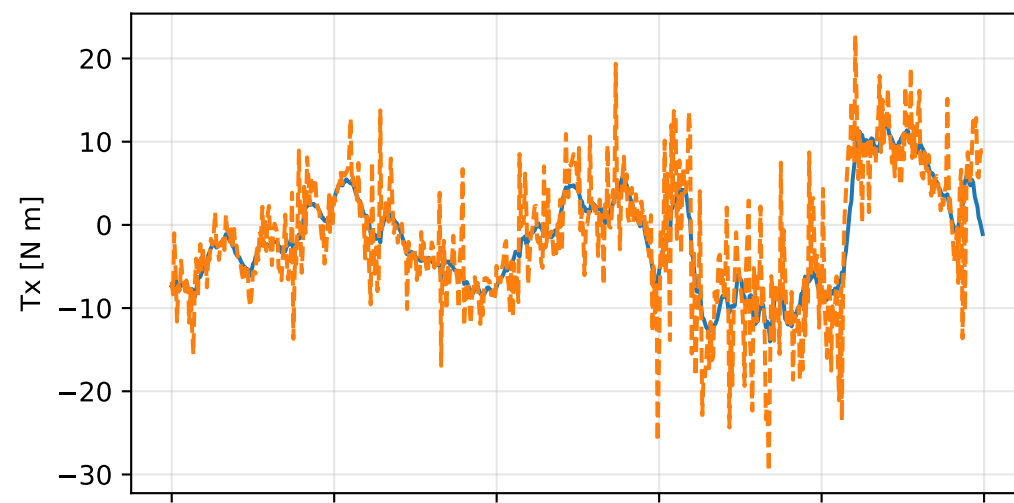
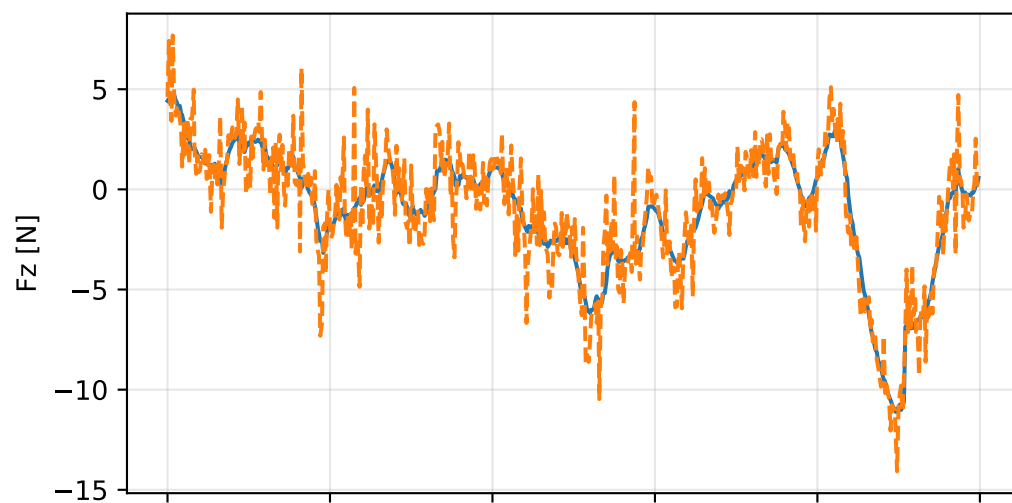


lag_fixed: trajectory

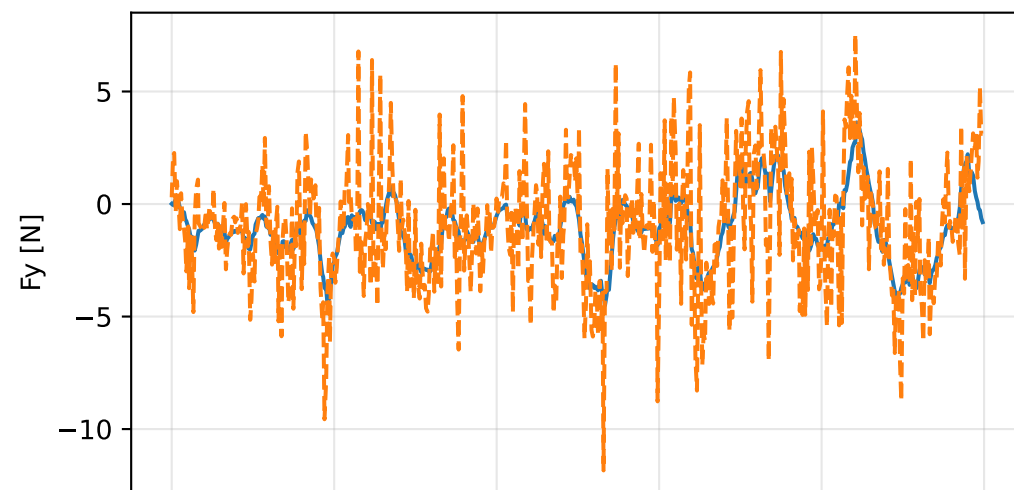


lag_fixed: residual wrench

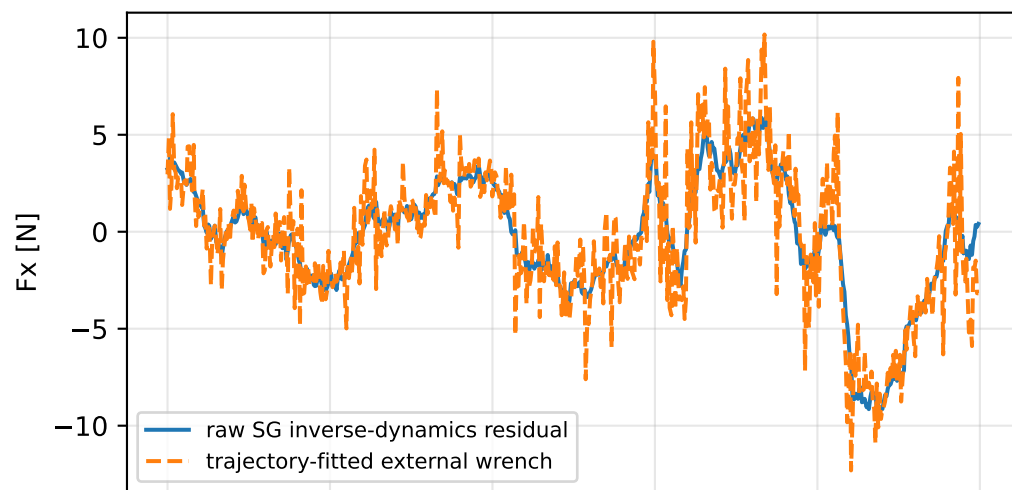


lag_fixed: measured sensor comparison

gyro

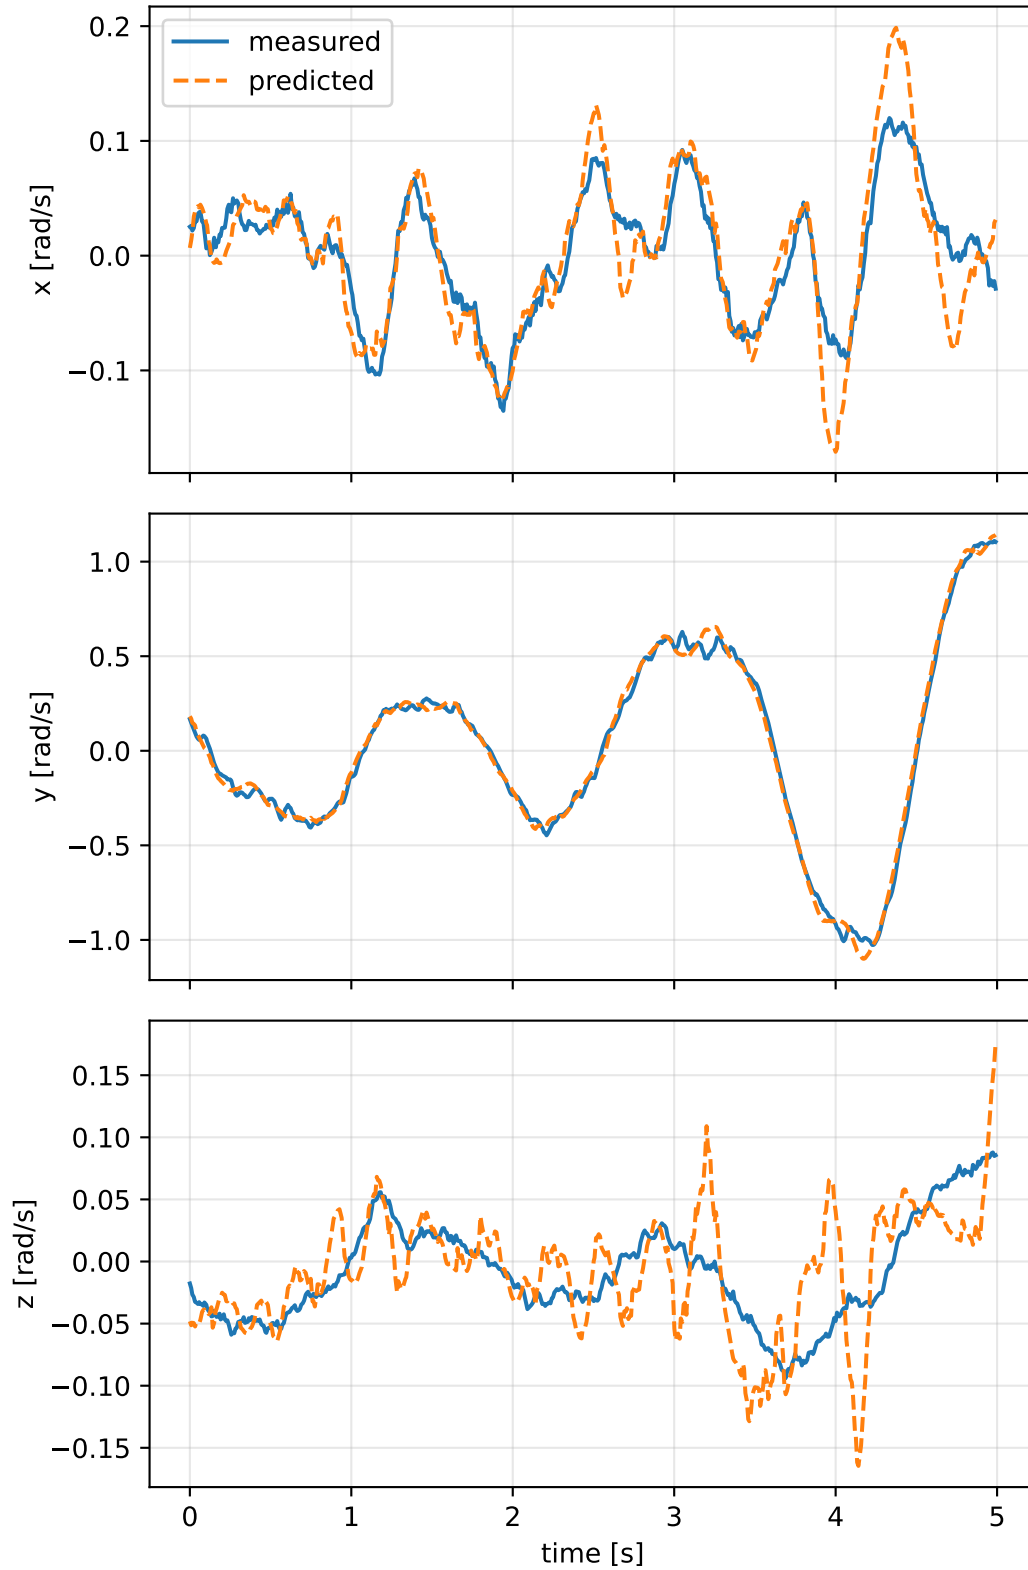

specific force

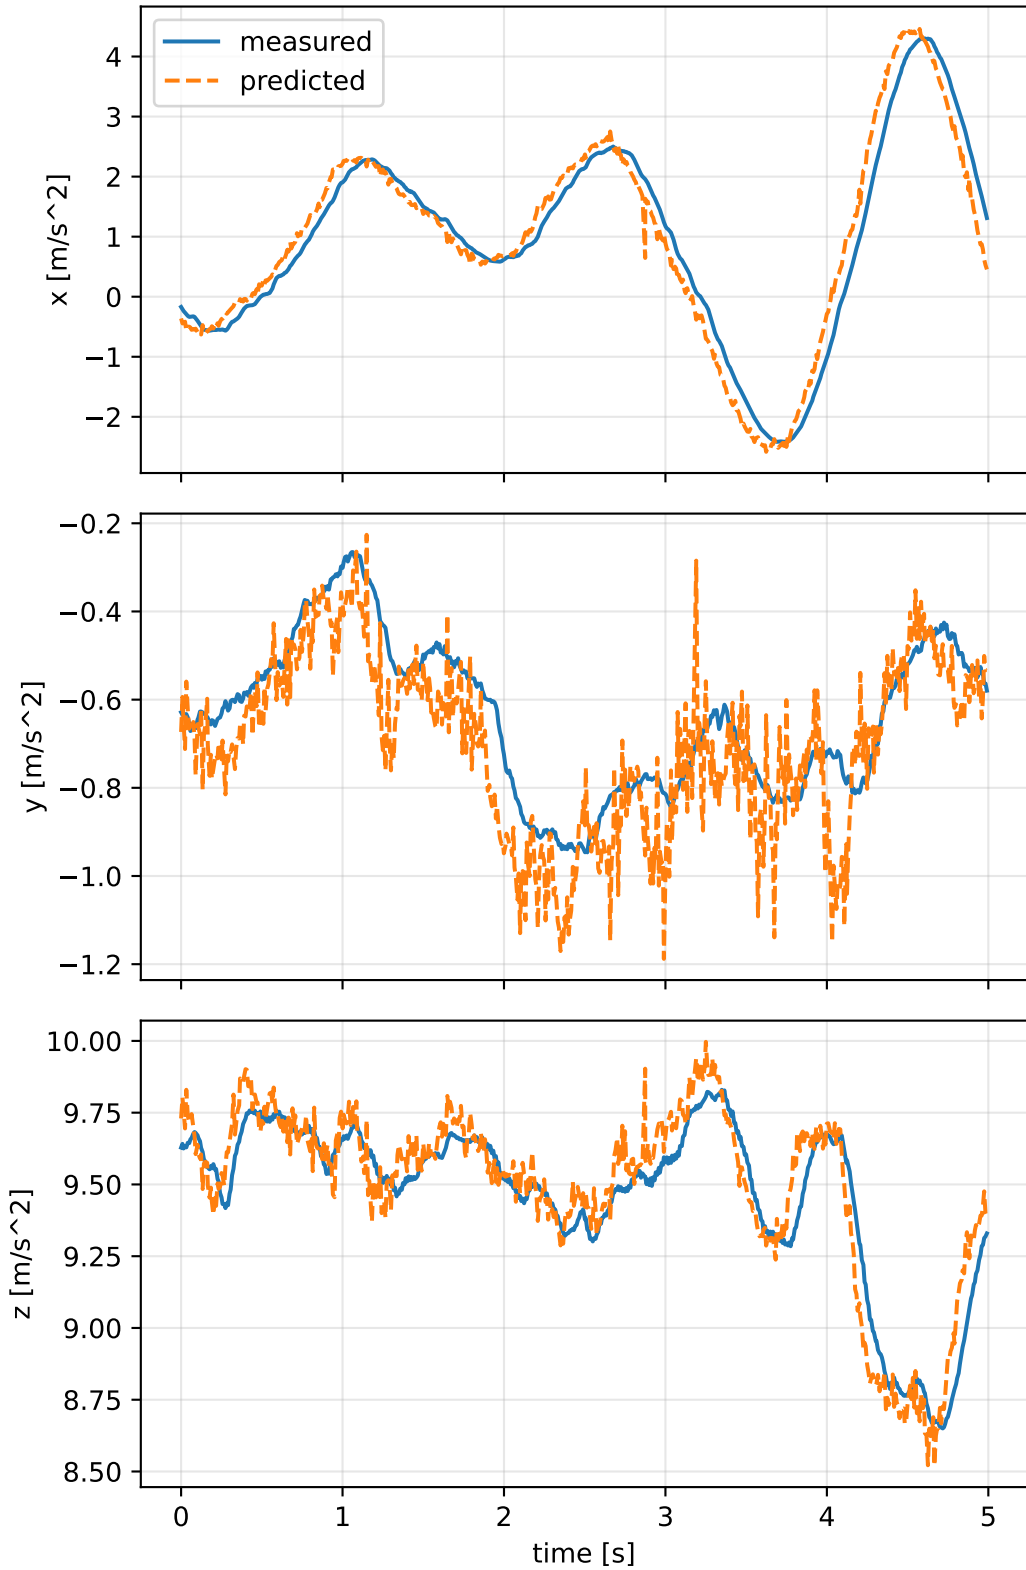

lag_fixed: nominal -> estimated parameters

Case: lag_fixed

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 6.61242388 delta 4.26082629

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [2.150938 3.0860197 4.6188777] d=[2.0859379 3.0860204 4.6188587]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [3.0860197 19.7880132 -0.6638391] d=[3.0860204 19.7230605 -0.6638392]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [4.6188777 -0.6638391 19.6034939] d=[4.6188587 -0.6638392 19.4745018]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [0.1774369 0.1591939 -0.2314458] d=[0.1794617 0.1592245]

rotor force effectiveness

[1. 1. 1. 1.] -> [5.9532103e-05 9.2038383e-01 4.4337170e+00 4.3360369e+00] d=[-0.9999405 -0.0796162 3.433717 3.3360369]

rotor lag [s] 0.00495767593

gimbal lag [s] 0.0049571991