

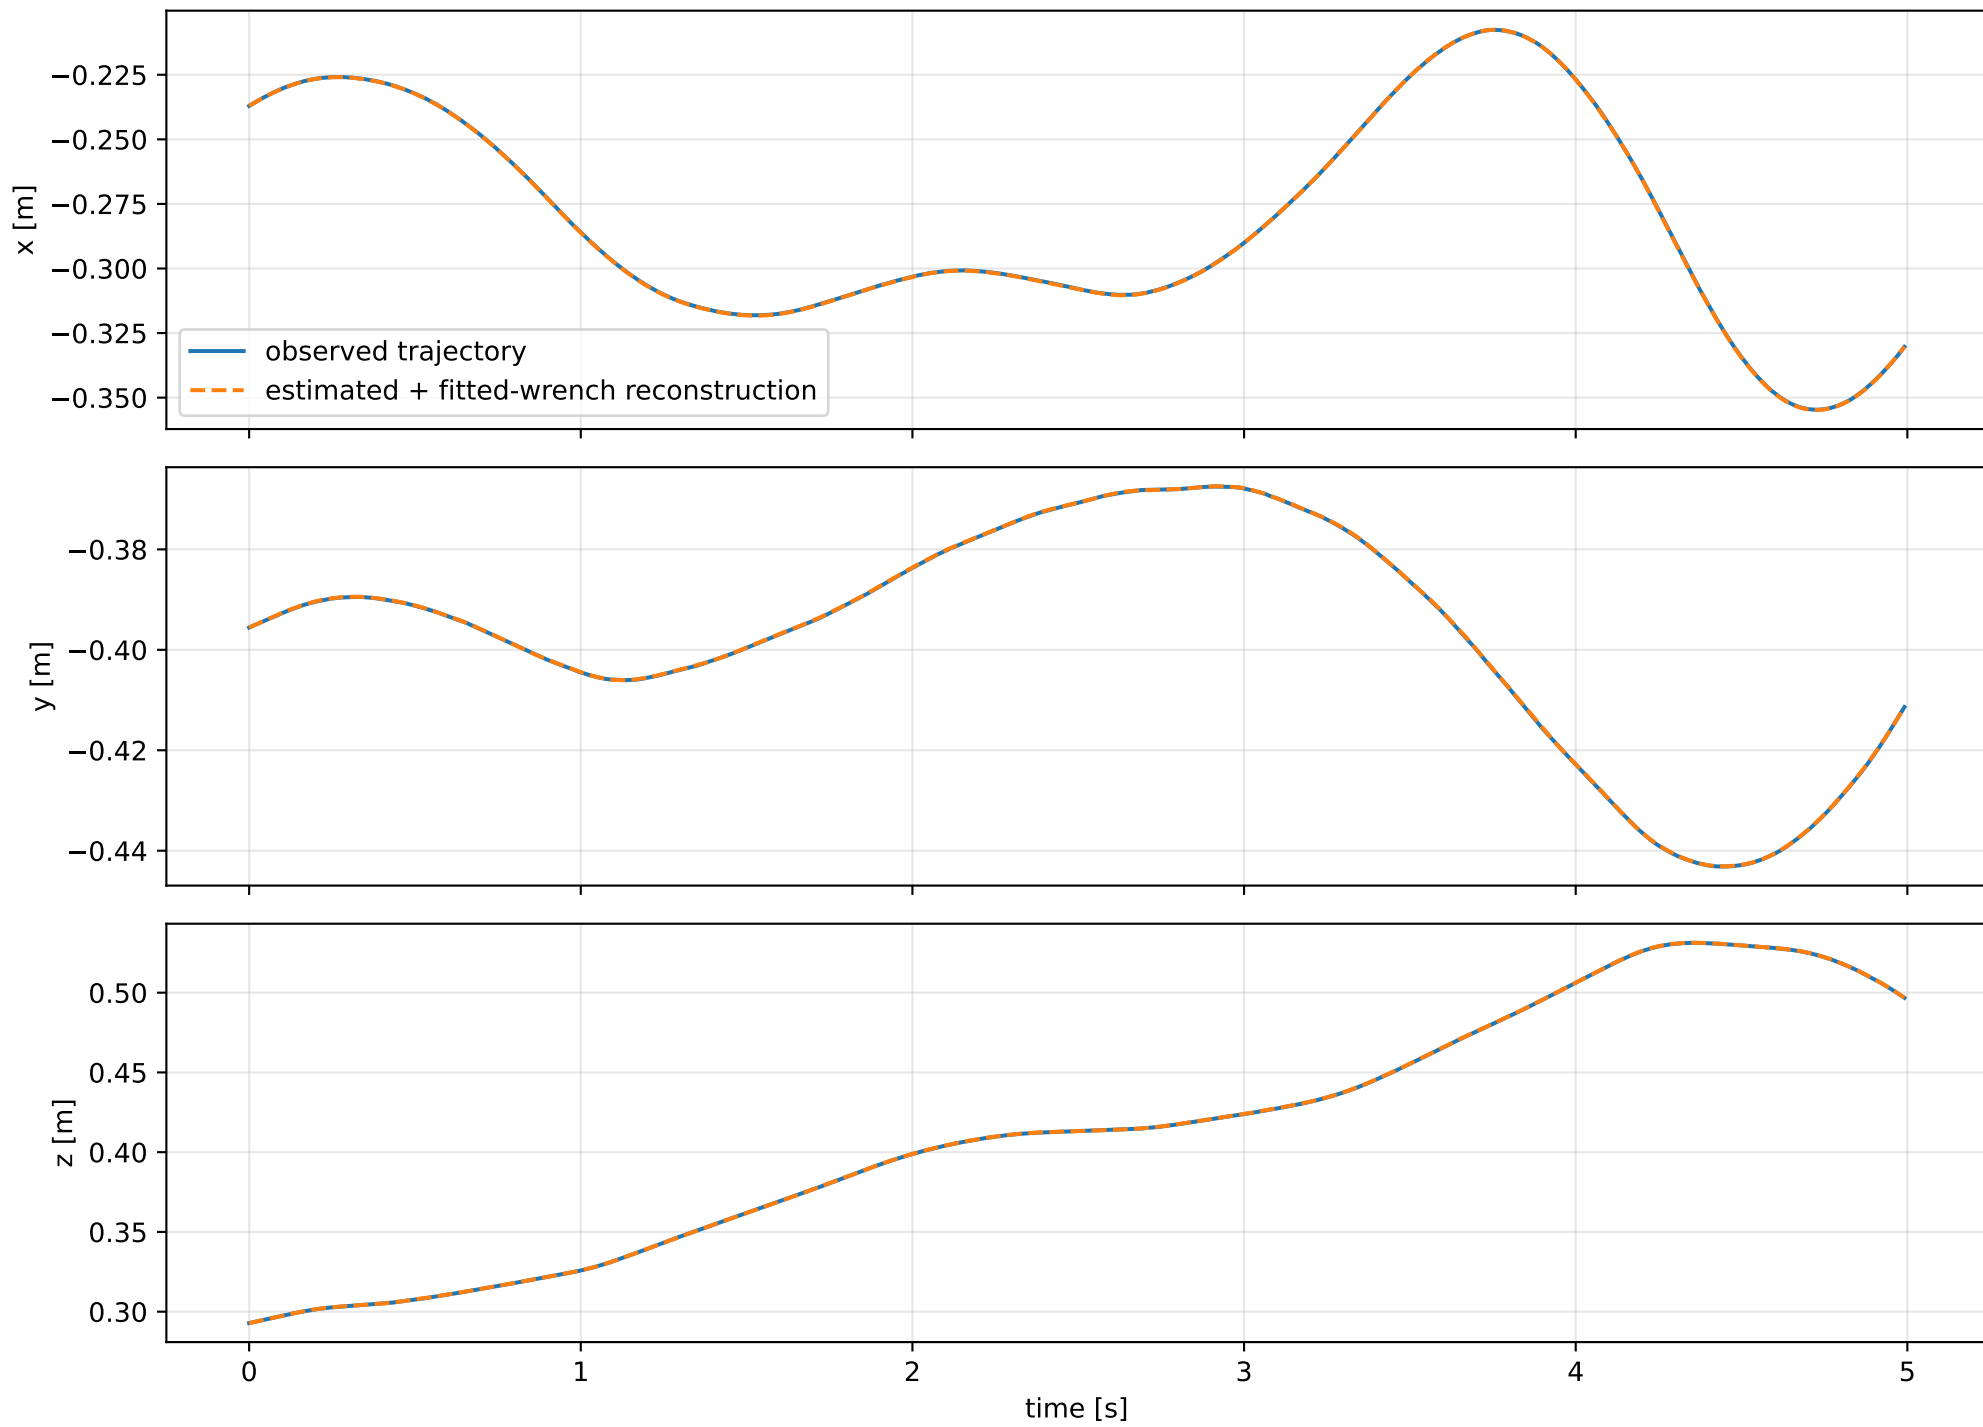
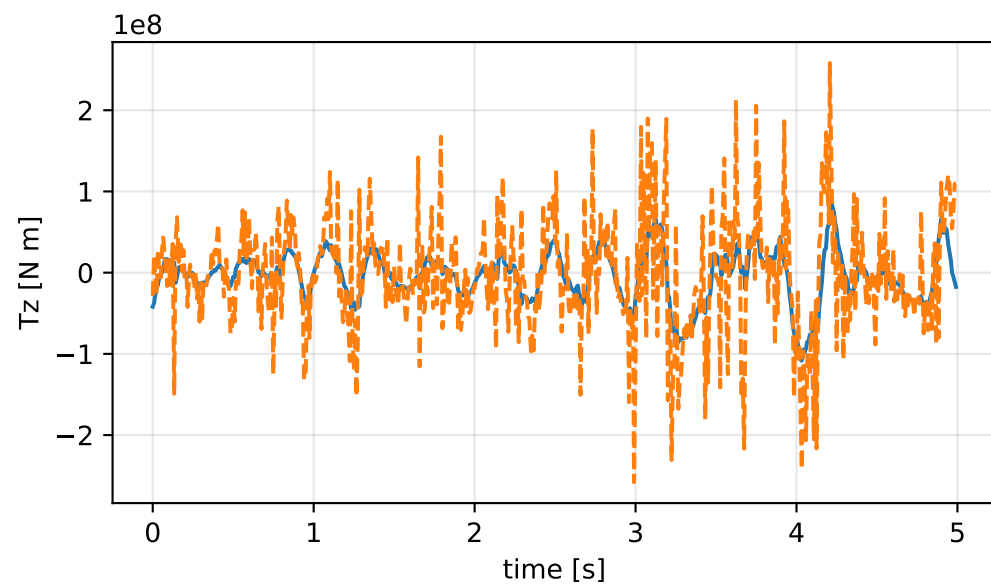
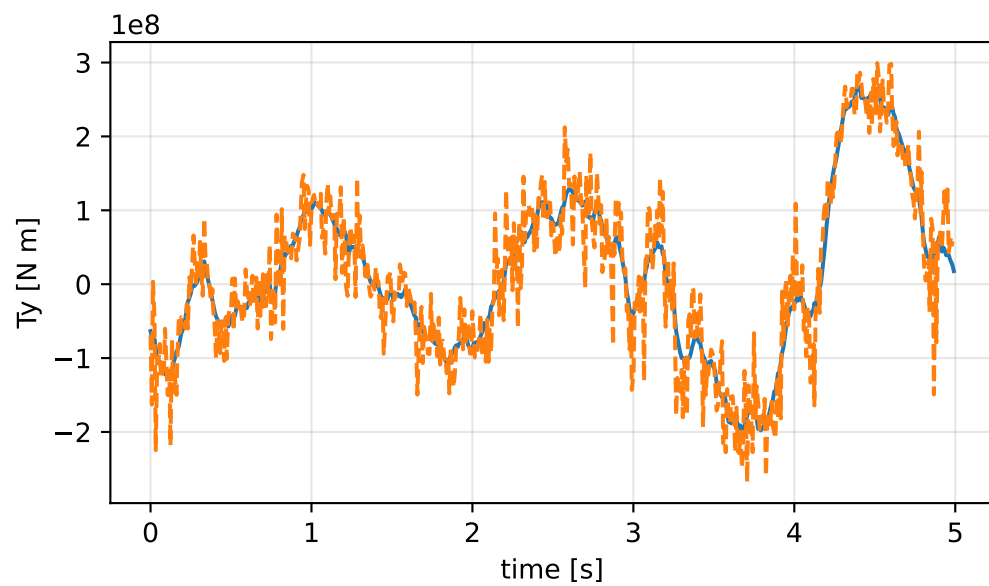
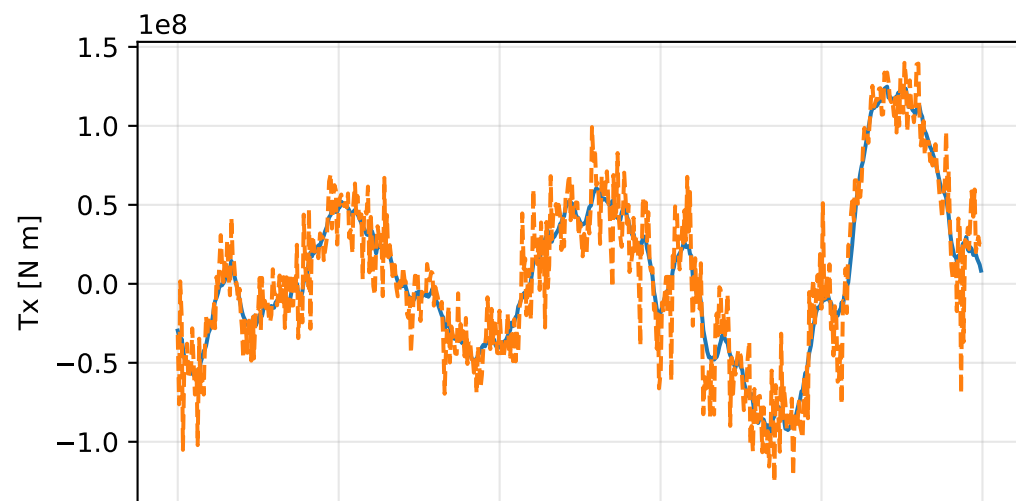
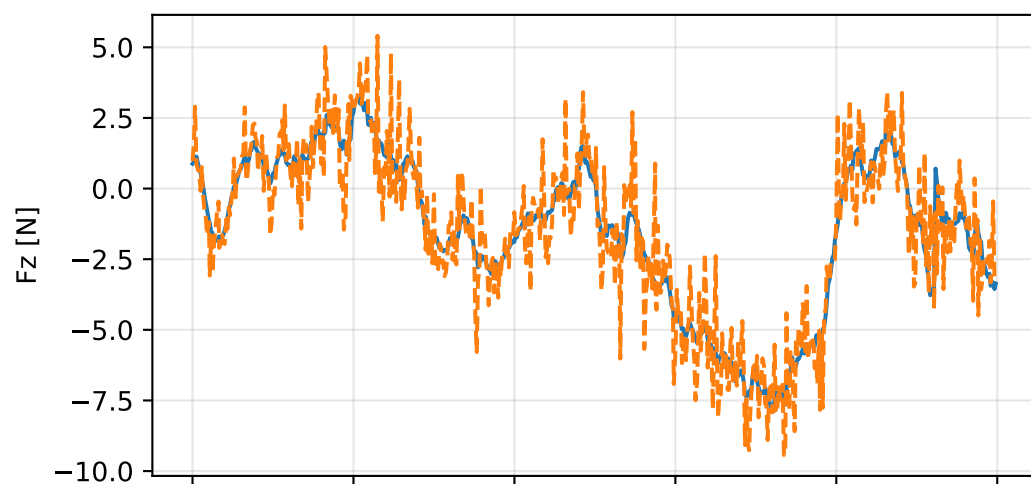



lag_split_strict_only: trajectory

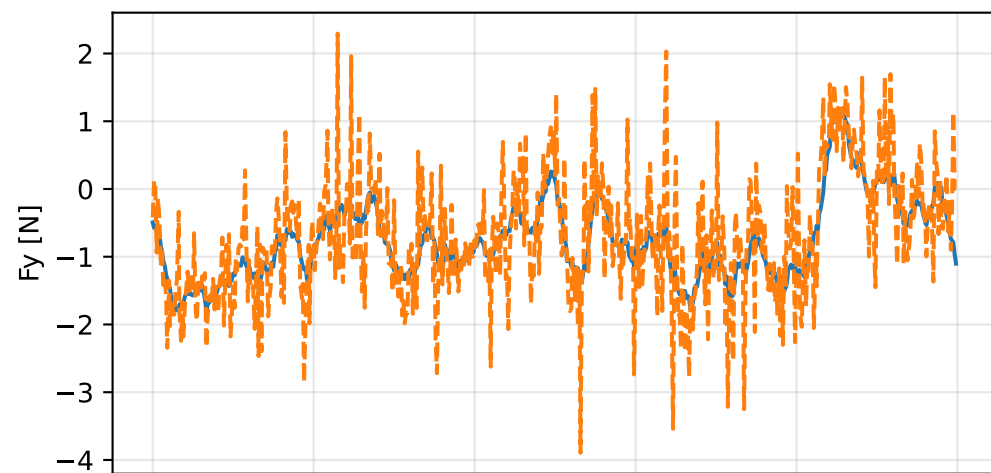

lag_split_strict_only: residual wrench

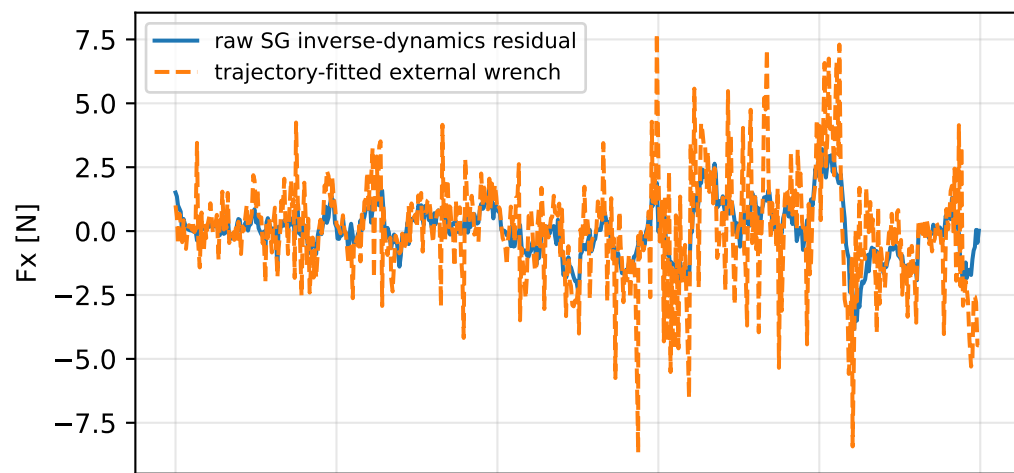

lag_split_strict_only: measured sensor comparison

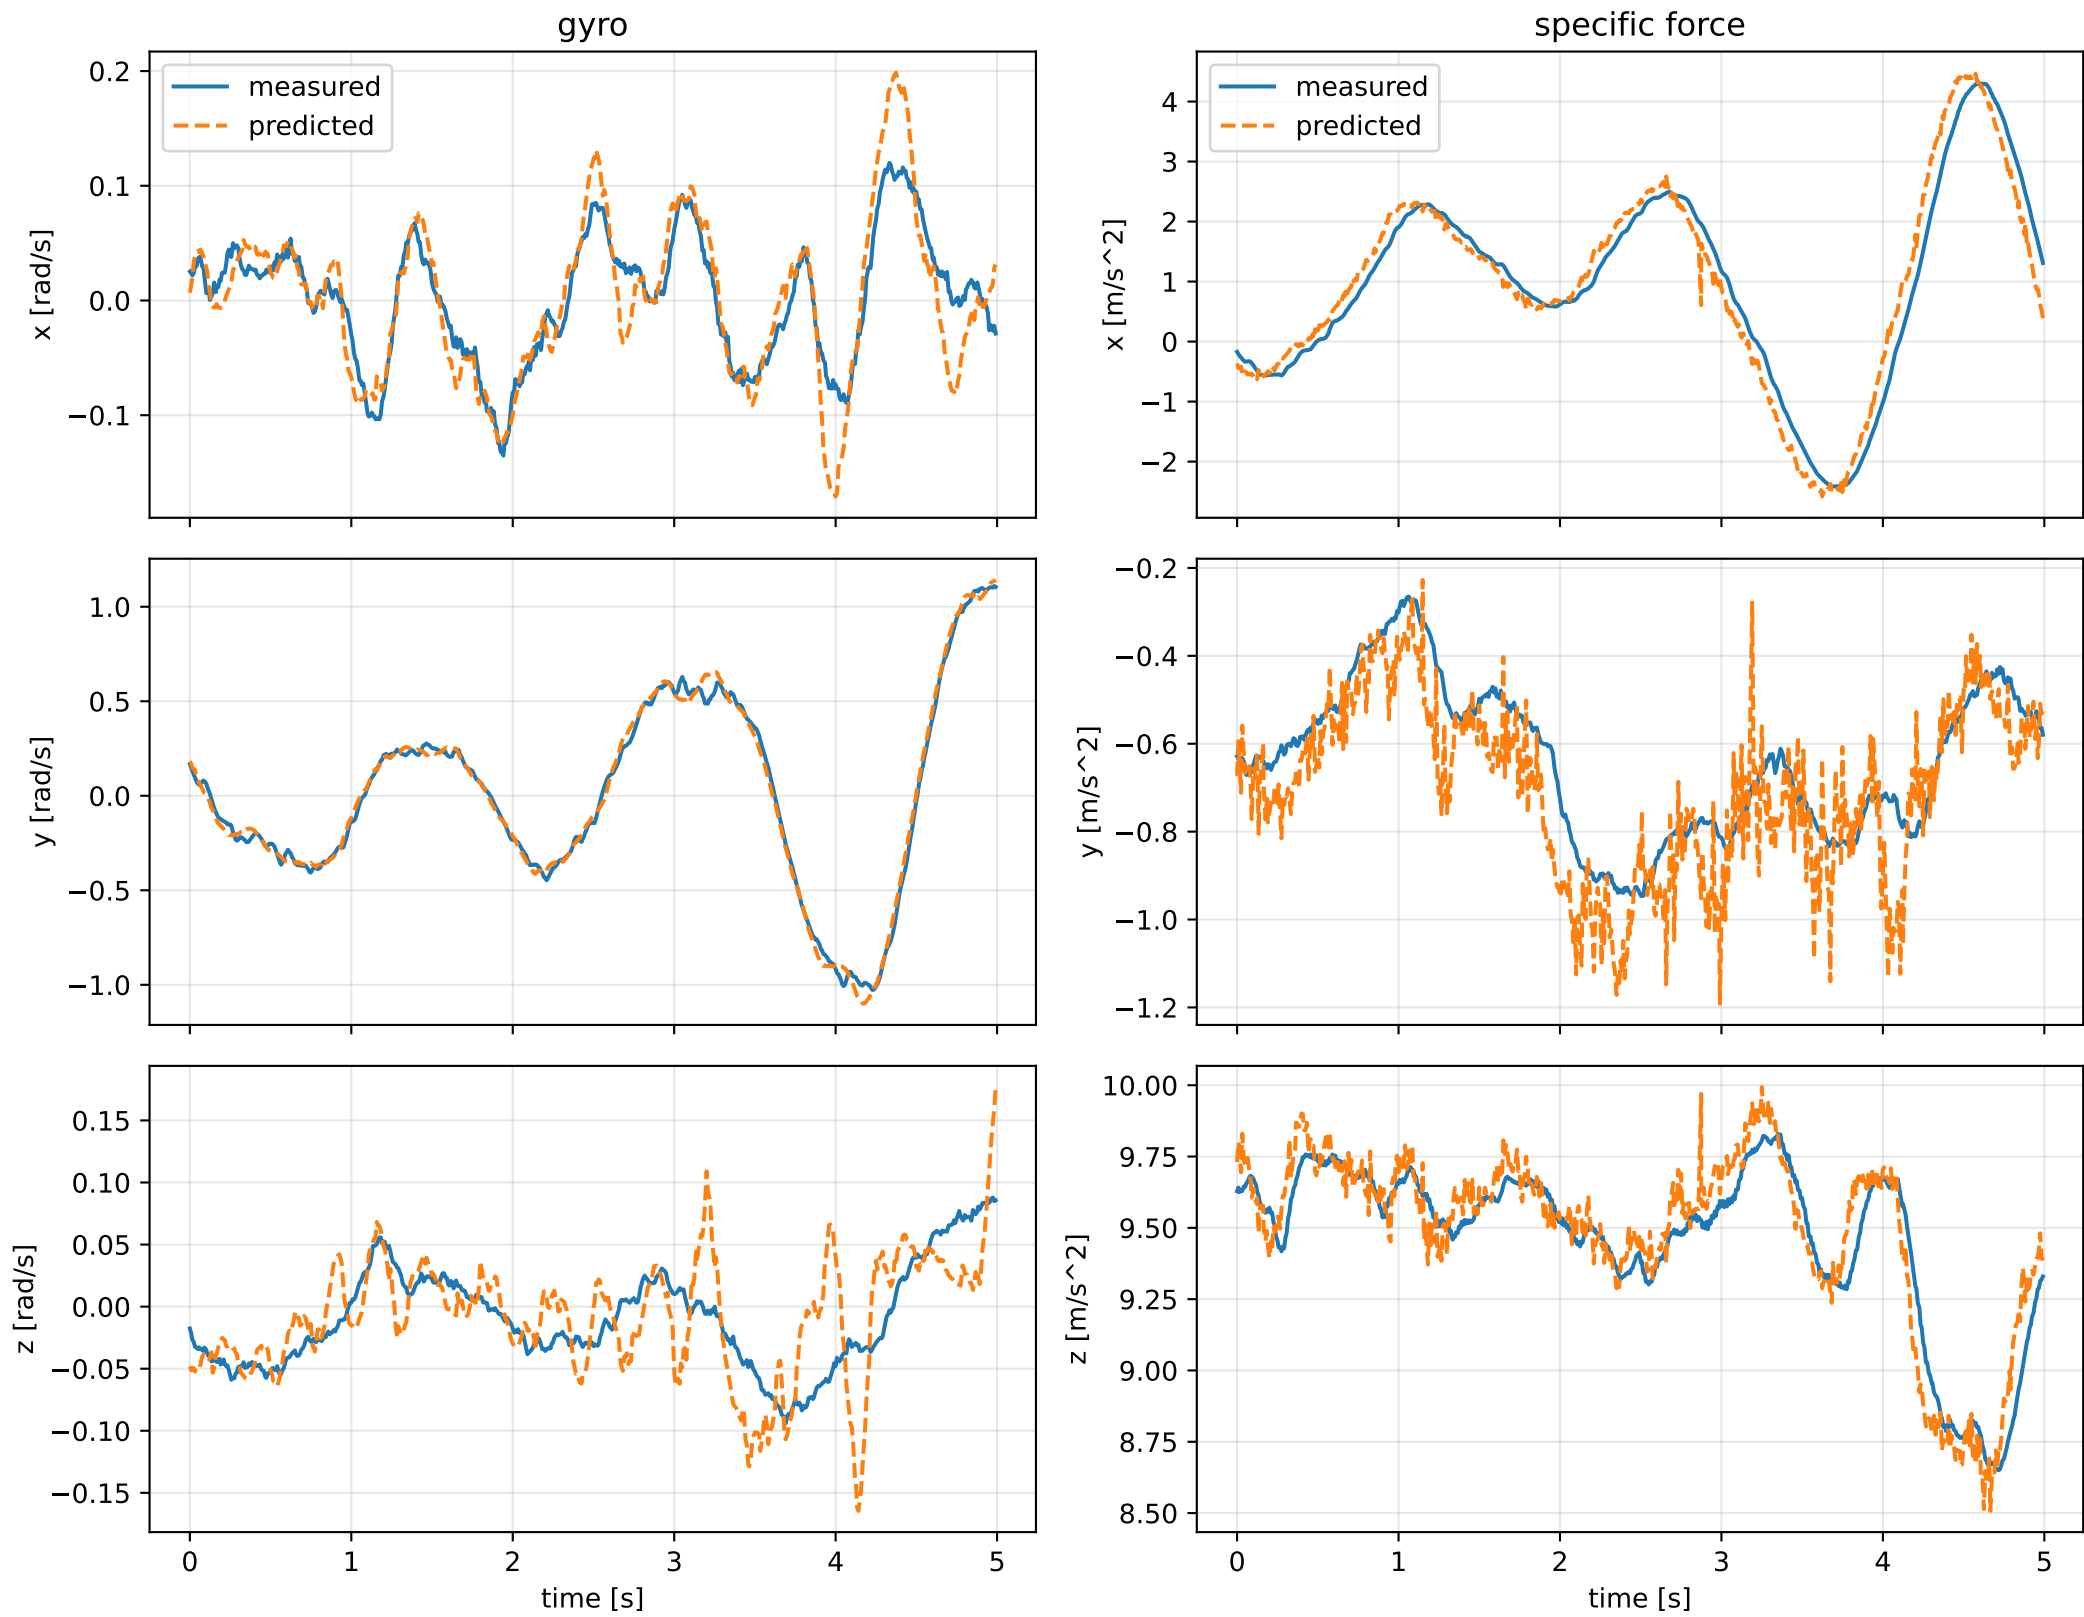

lag_split_strict_only: nominal -> estimated parameters

Case: lag_split_strict_only

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 8.04997571 delta 5.69837812

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [13161998.7744469 28135663.7616172 -163225.6575158] d=[13161998.7094469
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [28135663.7616172 60146492.0903623 76355.131776] d=[28135663.7616172
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-163225.6575158 76355.131776 73307604.8874207] d=[-163225.6575348

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0544633 0.1870011 -0.0227969] d=[-0.0524386 0.1870316

rotor force effectiveness

[1. 1. 1. 1.] -> [3.1333985e-08 3.1242096e+00 5.9602868e+00 2.9354195e+00] d=[-1. 2.1242096 4.9602868 1.9354195

rotor lag [s] 0.0842804909

gimbal lag [s] 0.0396575928