

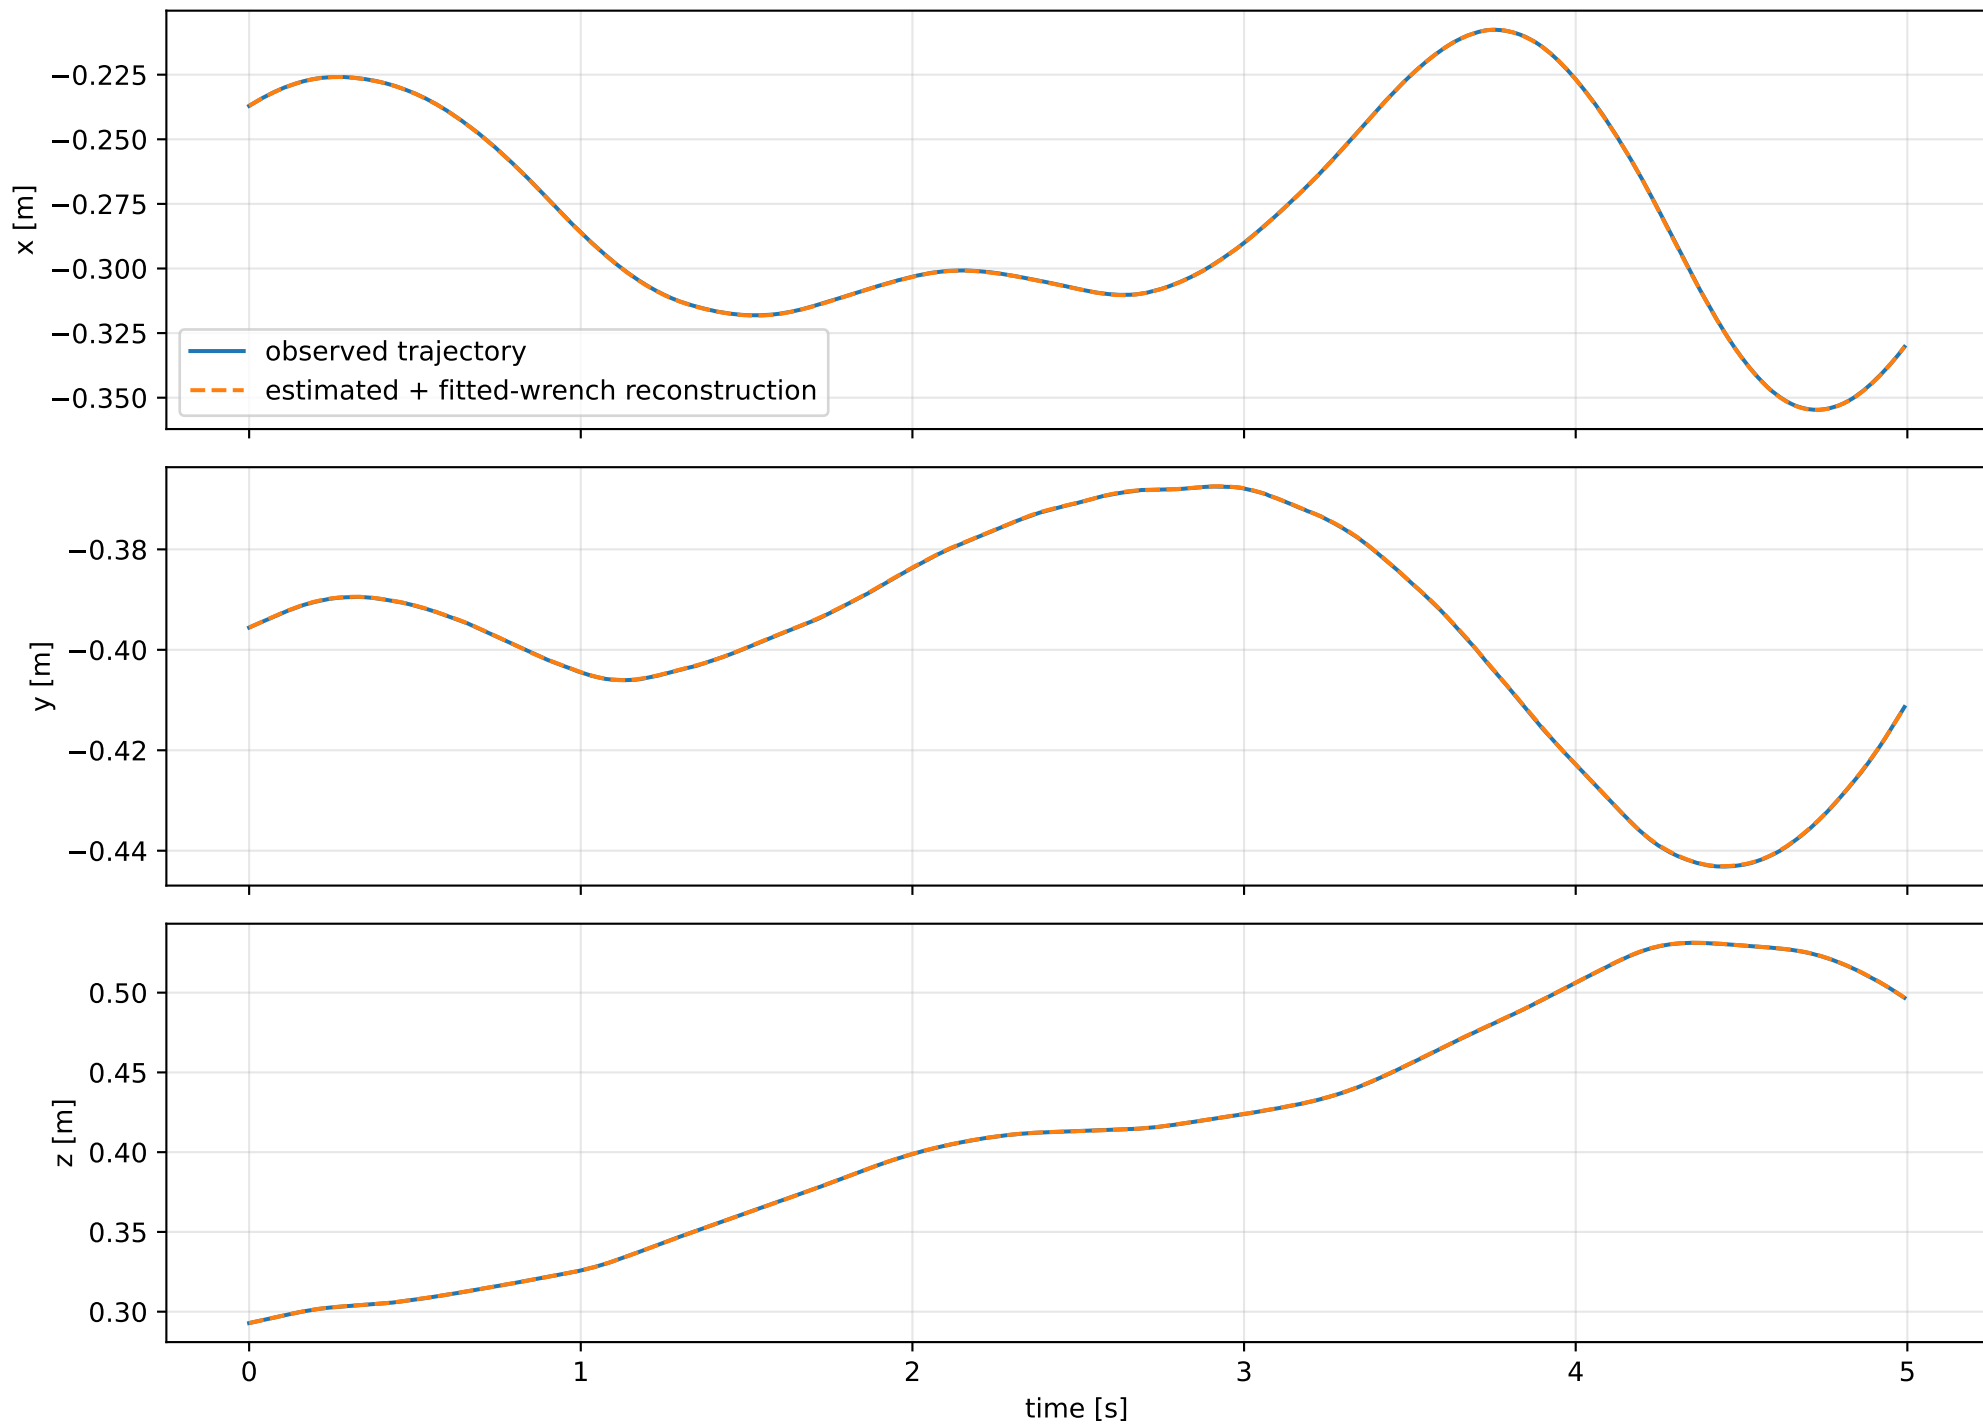
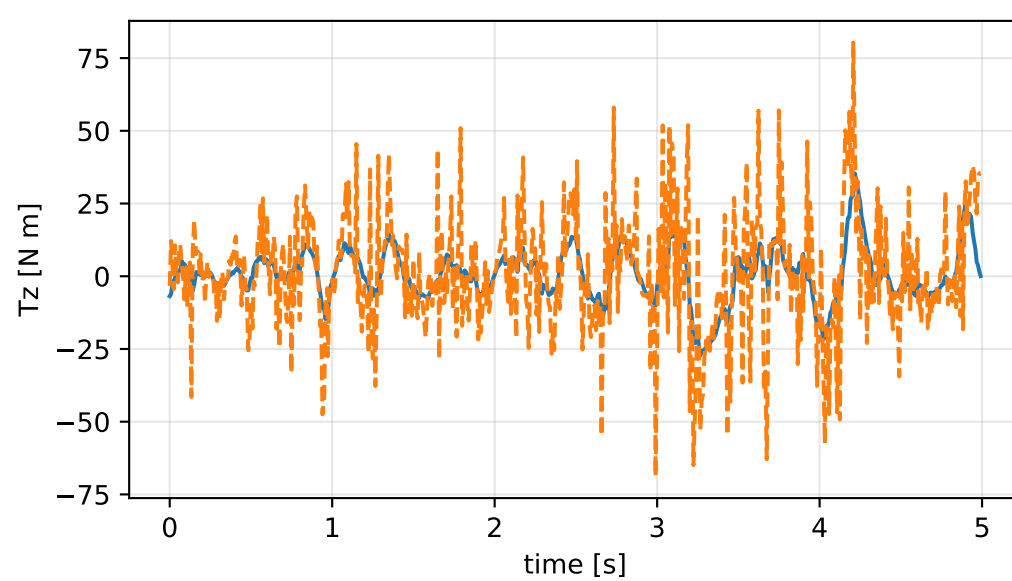
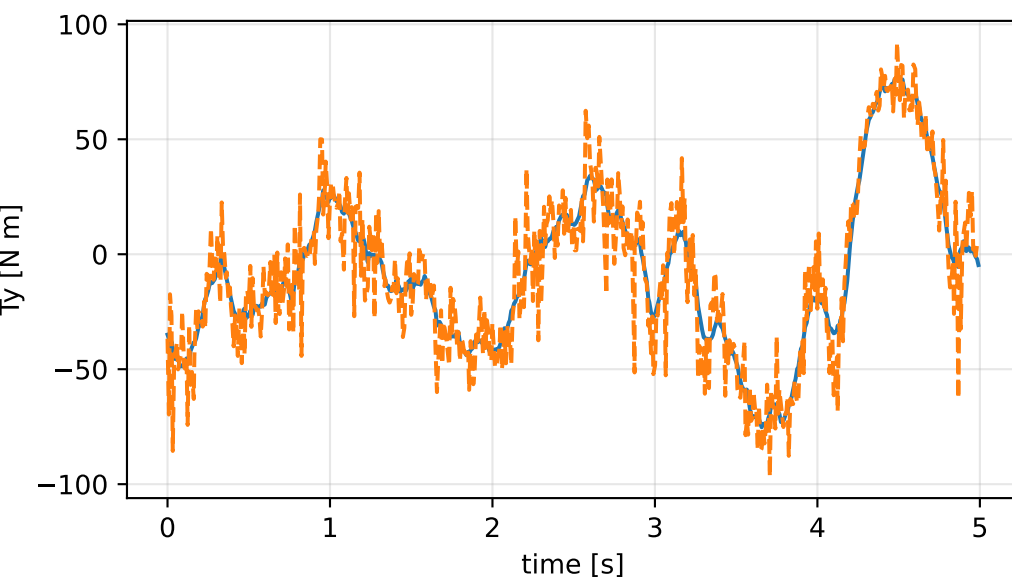
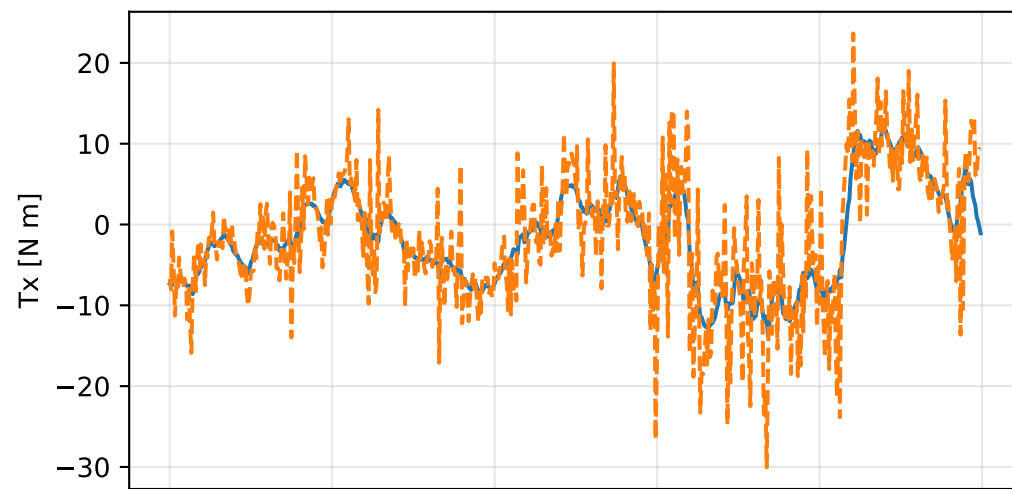
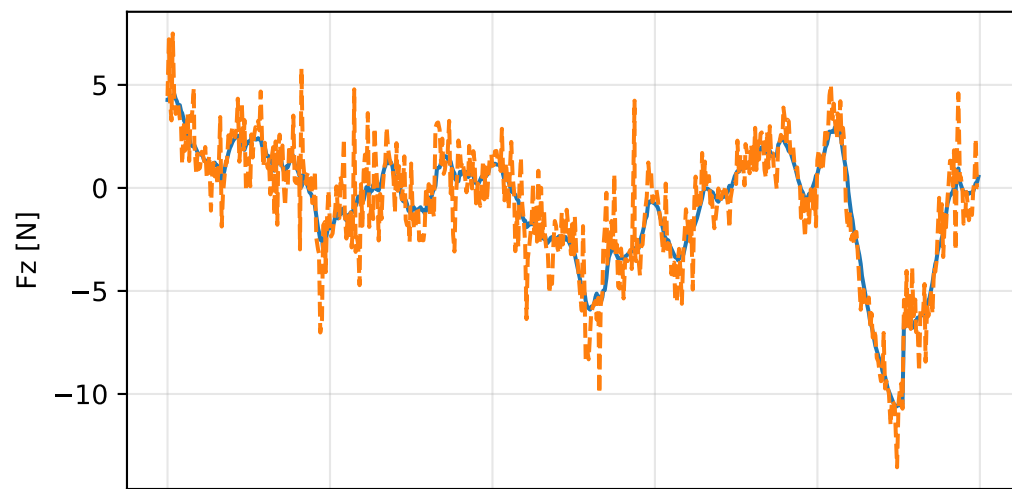


lag_zero: trajectory

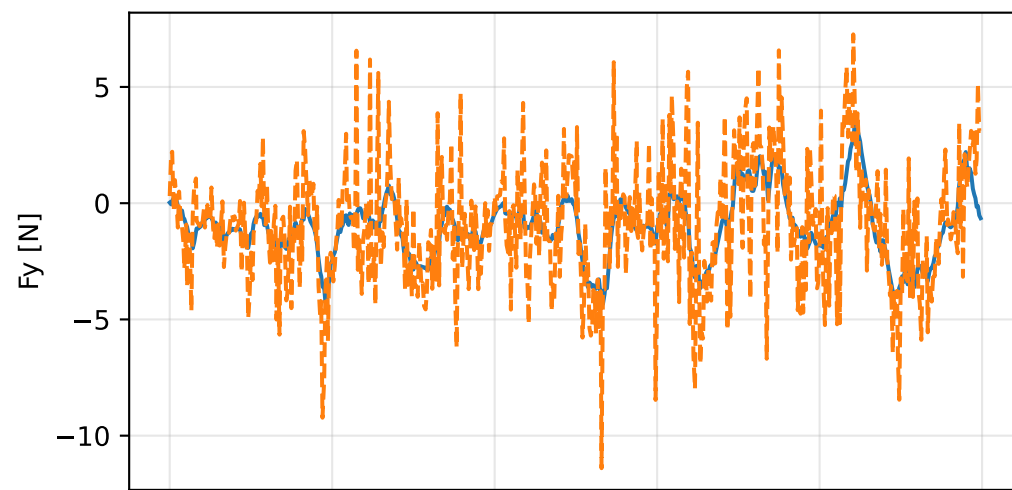


lag_zero: residual wrench

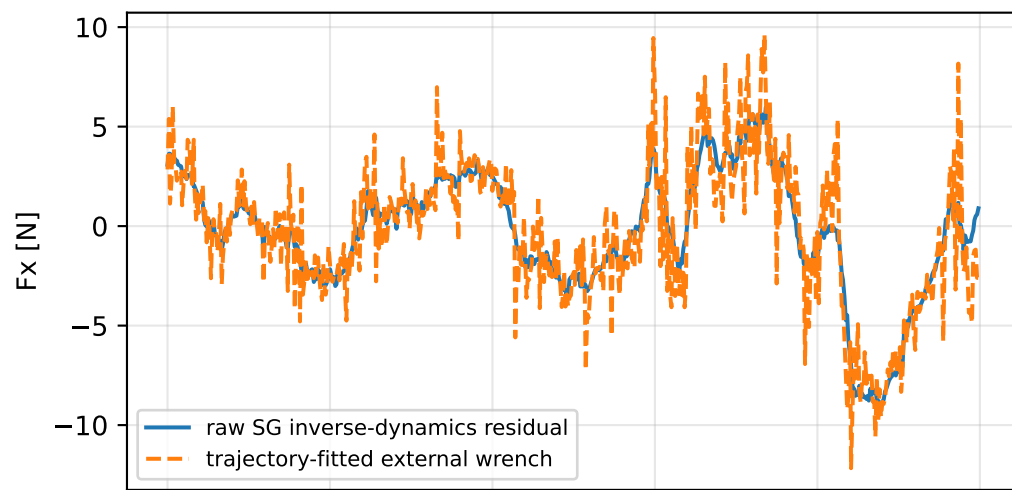


lag_zero: measured sensor comparison

gyro

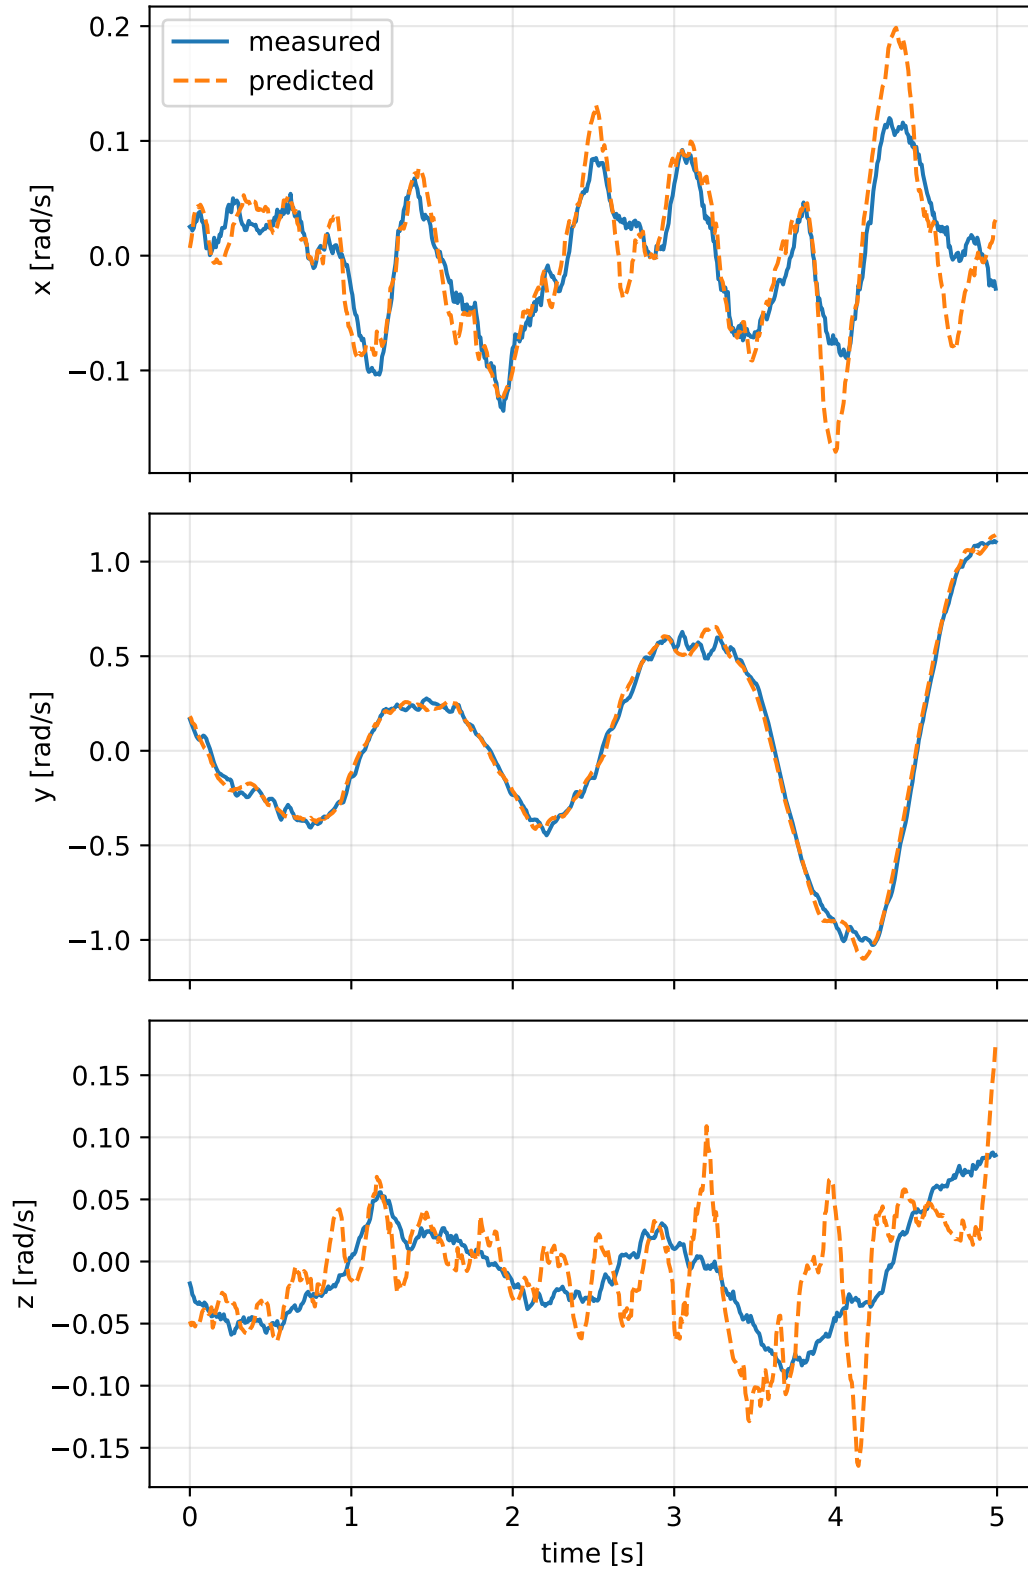

specific force

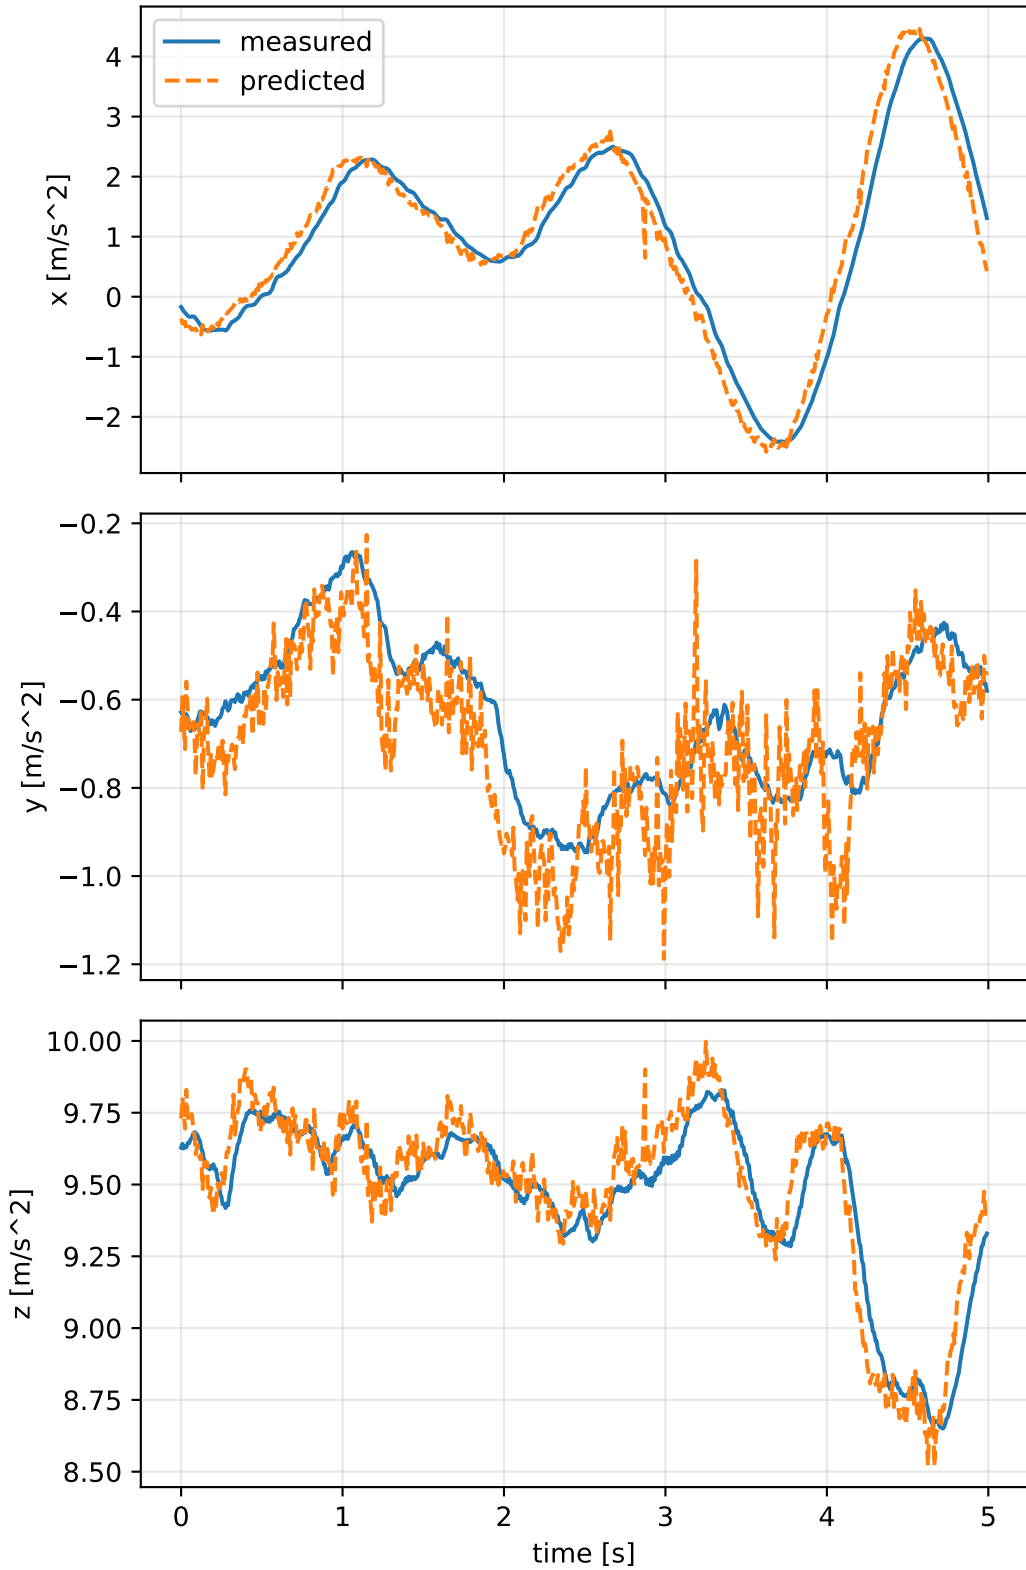

lag_zero: nominal -> estimated parameters

Case: lag_zero

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 6.12957873 delta 3.77798114

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [2.2053094 3.0331225 4.8293738] d=[2.1403093 3.0331233 4.8293548]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [3.0331225 20.0103958 -0.6783801] d=[3.0331233 19.9454432 -0.6783801]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [4.8293738 -0.6783801 19.6789464] d=[4.8293548 -0.6783801 19.5499543]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [0.1905321 0.1574038 -0.2423018] d=[0.1925568 0.1574343]

rotor force effectiveness

[1. 1. 1. 1.] -> [6.7677048e-05 8.6084102e-01 4.0916806e+00 4.0247962e+00] d=[-0.9999323 -0.139159 3.0916806 3.0247962]

rotor lag [s] 0

gimbal lag [s] 0