




naive_all: trajectory

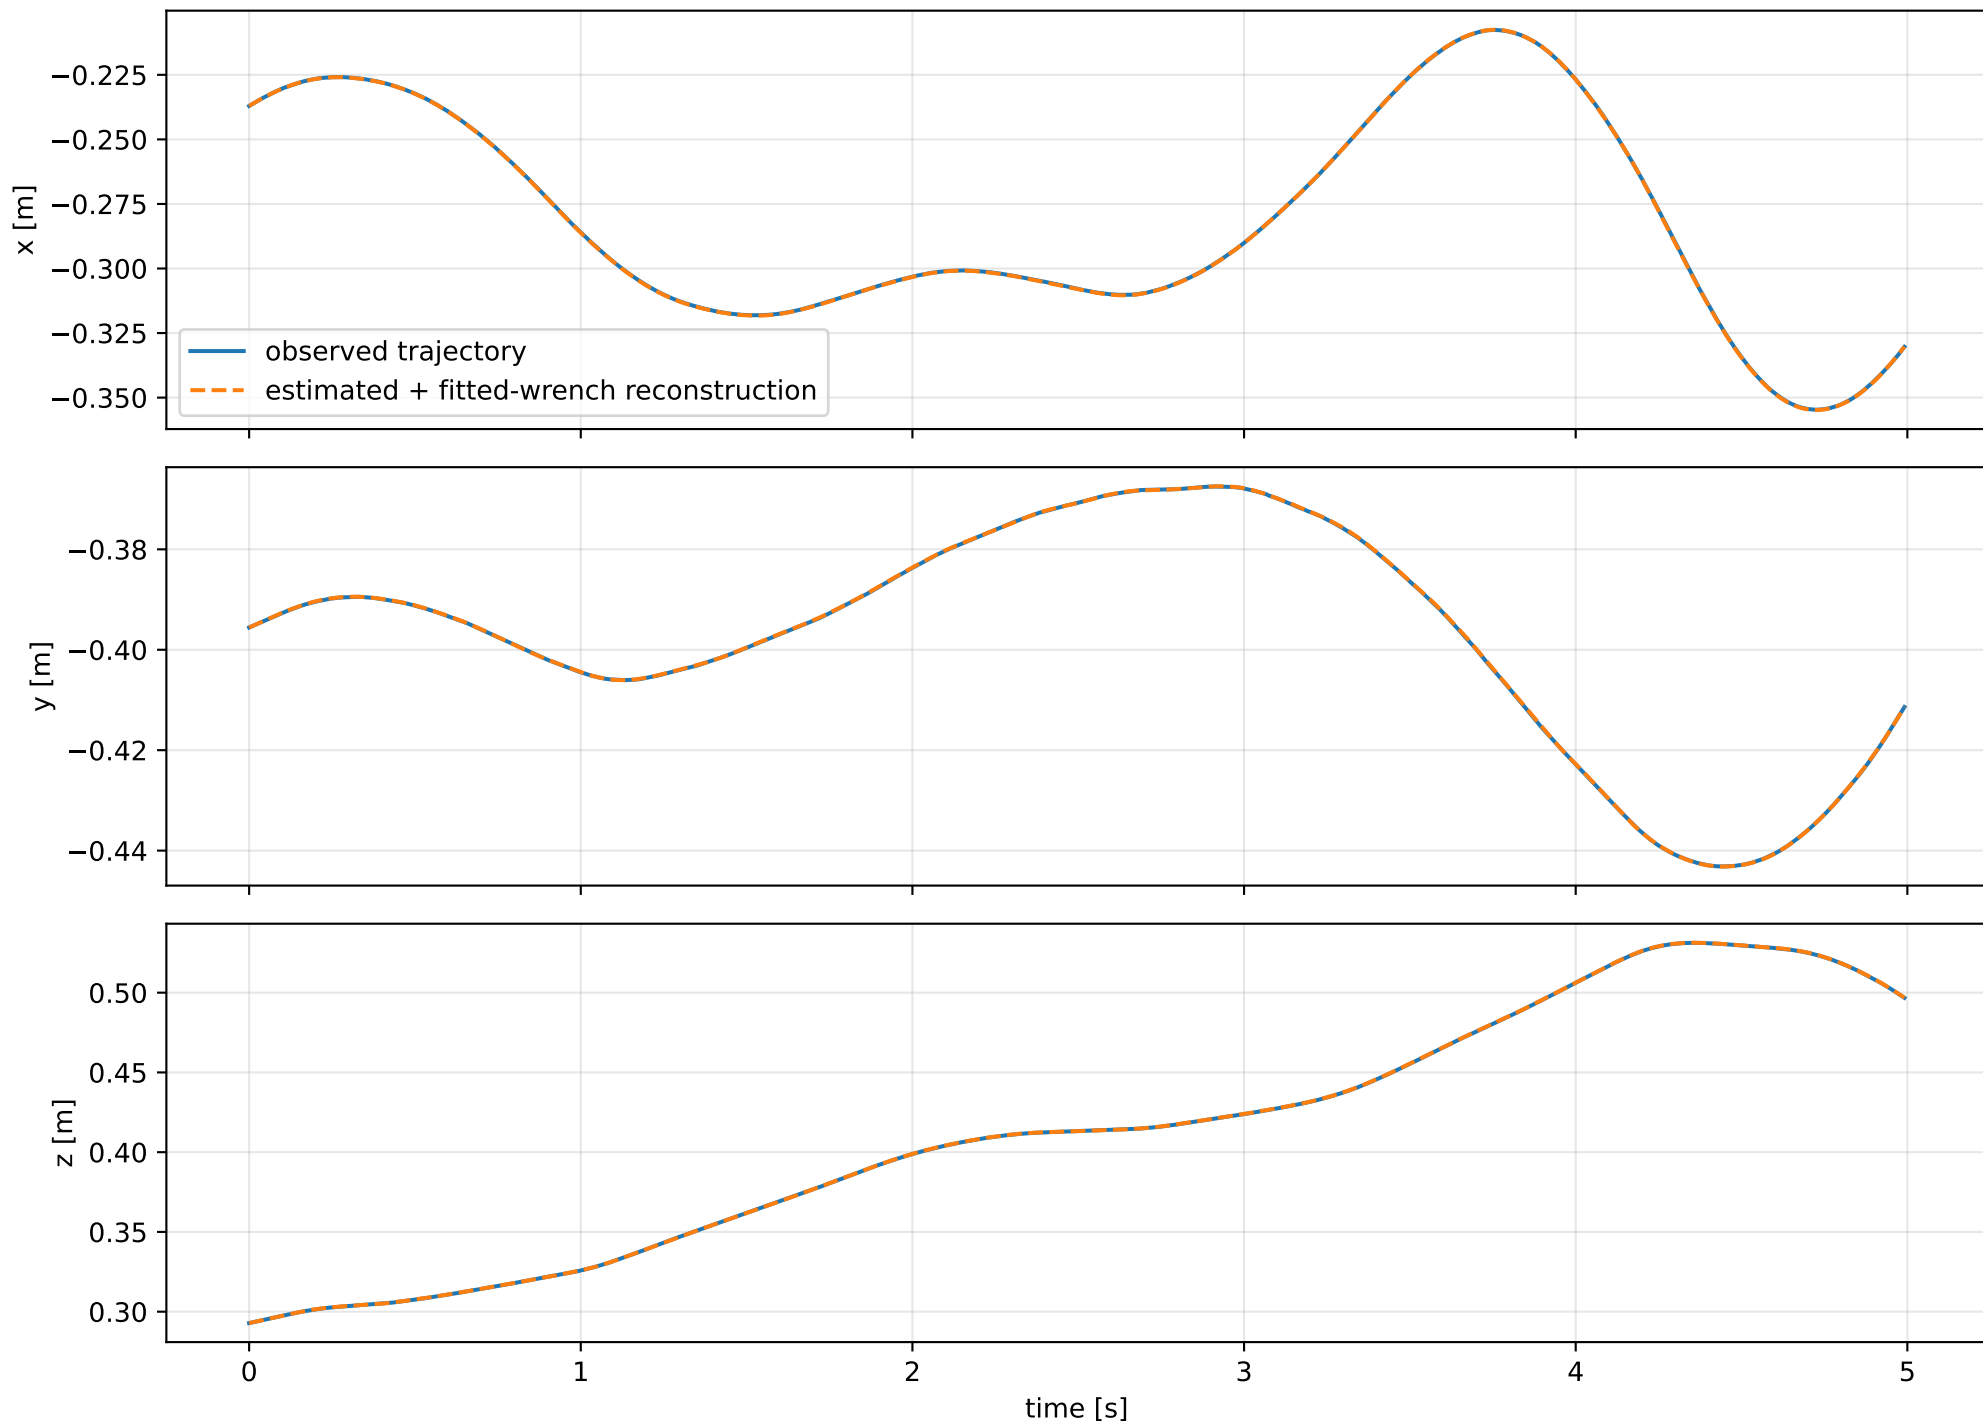

naive_all: residual wrench

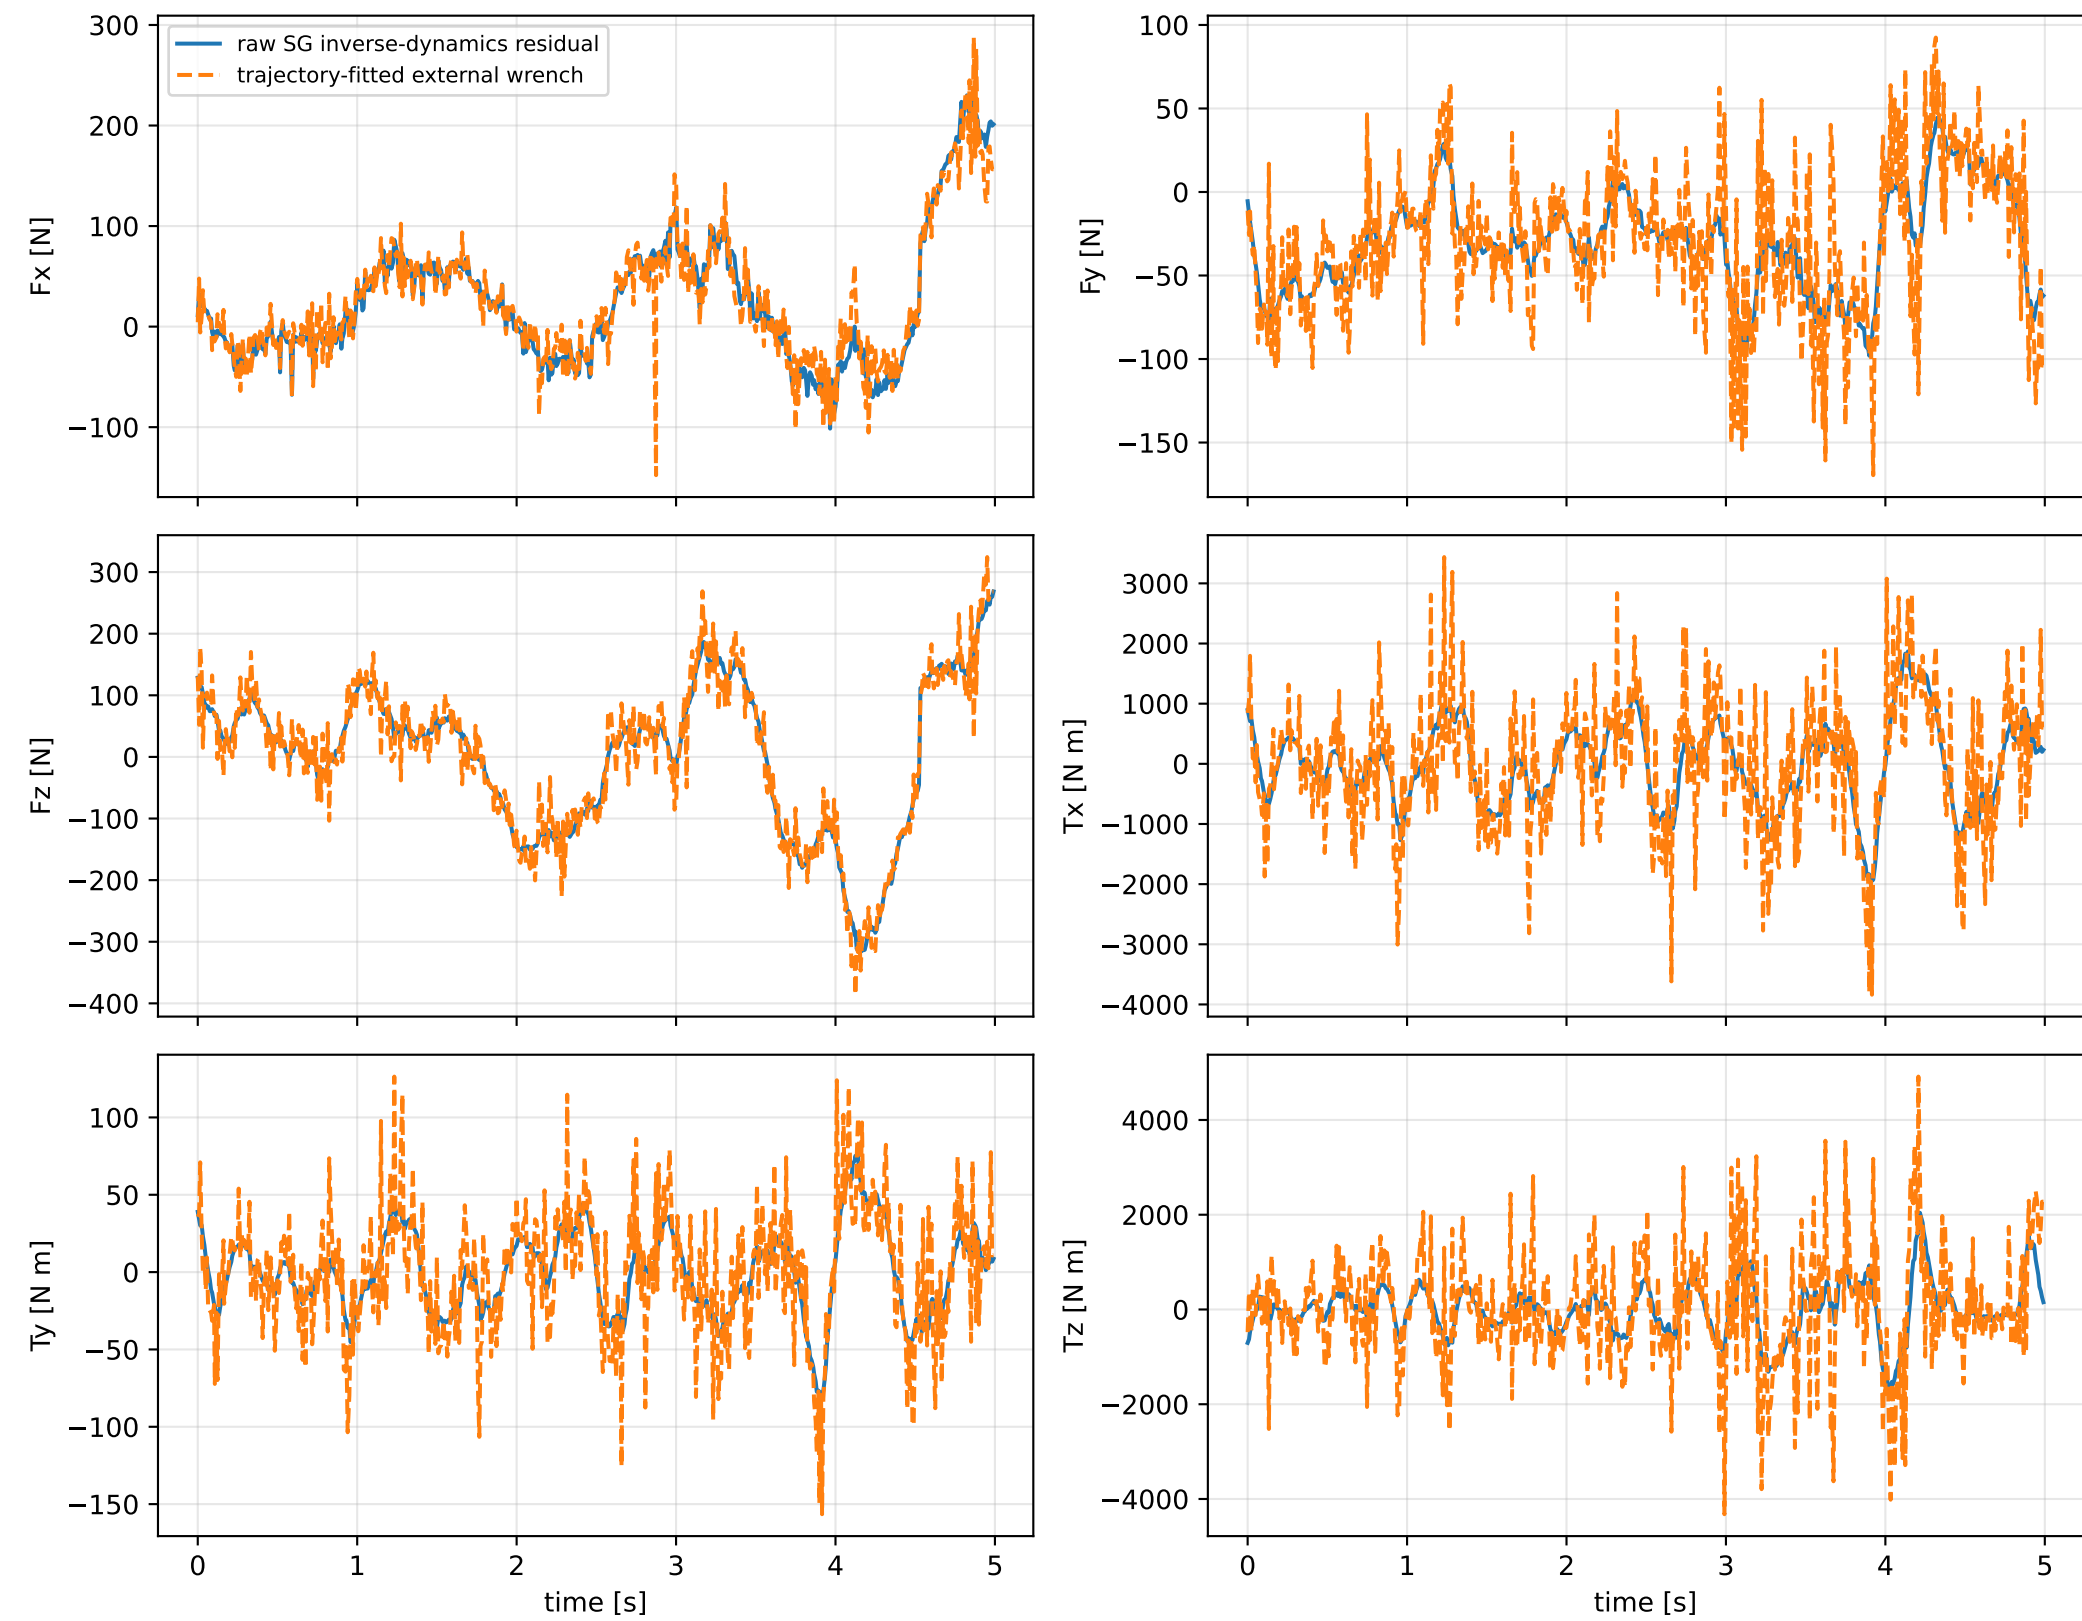

naive_all: measured sensor comparison

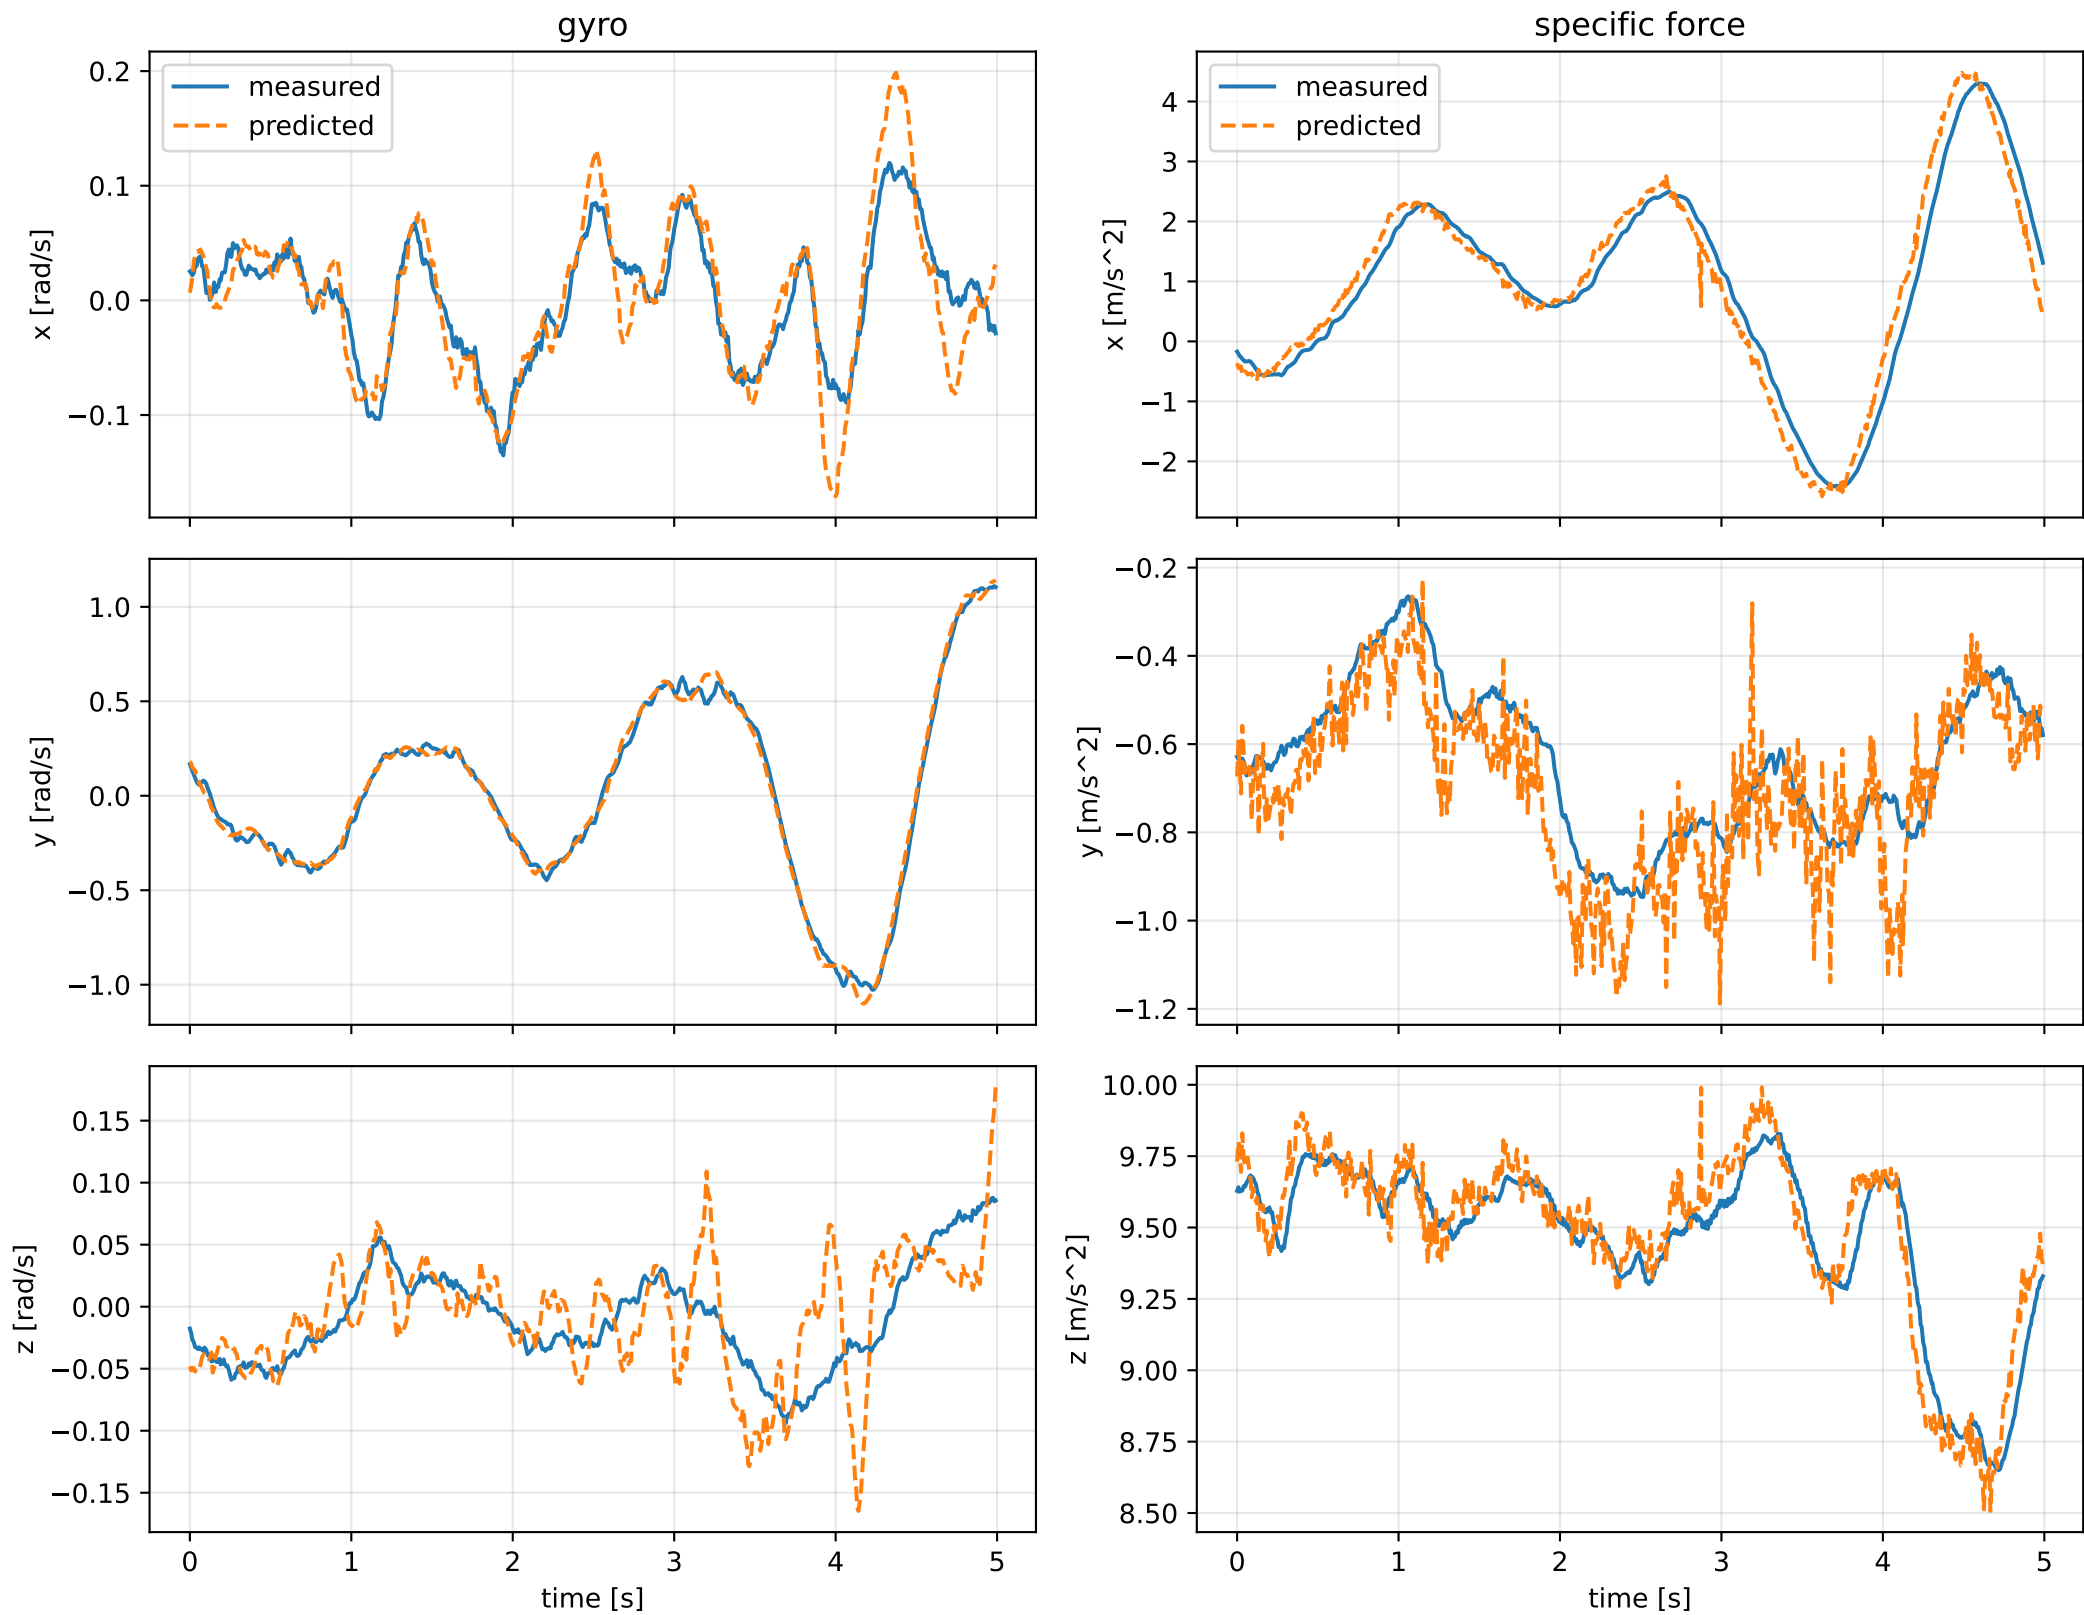

naive_all: nominal -> estimated parameters

Case: naive_all

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 267.912242 delta 265.560644

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [1.2303401e+03 4.8259716e+01 4.3263067e-01] d=[1.2302751e+03 4.8259716e+01 4.3263067e-01]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [48.2597157 2.4103852 -7.2989677] d=[48.2597164 2.3454325 -7.2989677]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [4.3263067e-01 -7.2989677e+00 1.2325627e+03] d=[4.3261165e-01 -7.2989677e+00 1.2325627e+03]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.222743 -0.0162438 -0.0201043] d=[-0.2207183 -0.0162133 -0.0201043]

rotor force effectiveness

[1. 1. 1. 1.] -> [1.9264624e+02 4.3169043e-06 3.9027596e-06 1.8288217e+02] d=[191.6462428 -0.9999957 -0.9999961 181.8821717]

rotor lag [s] 0

gimbal lag [s] 0