

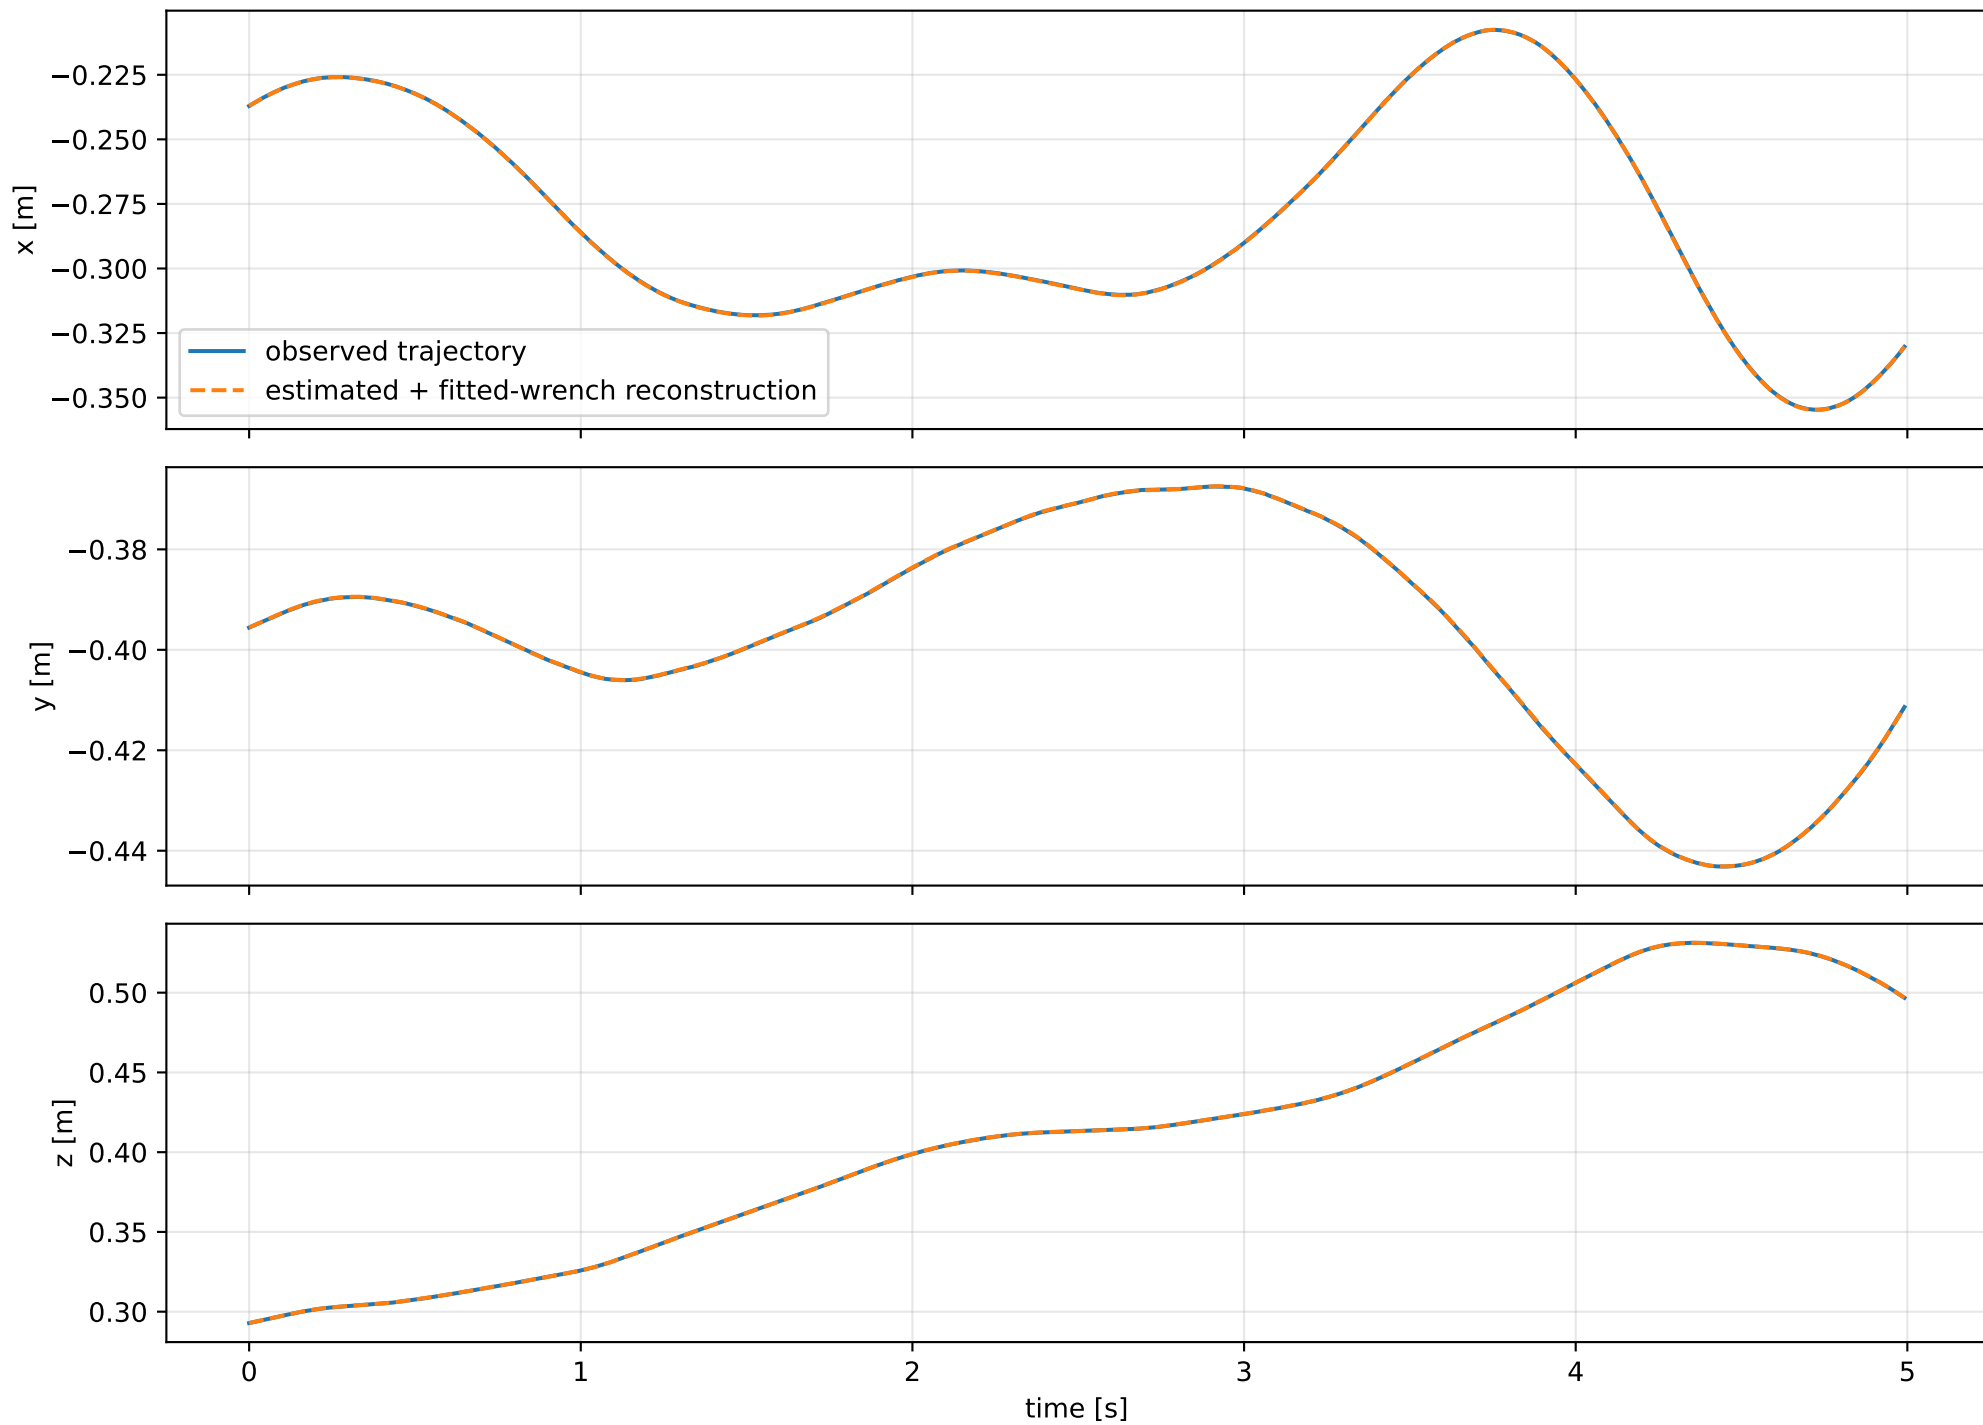
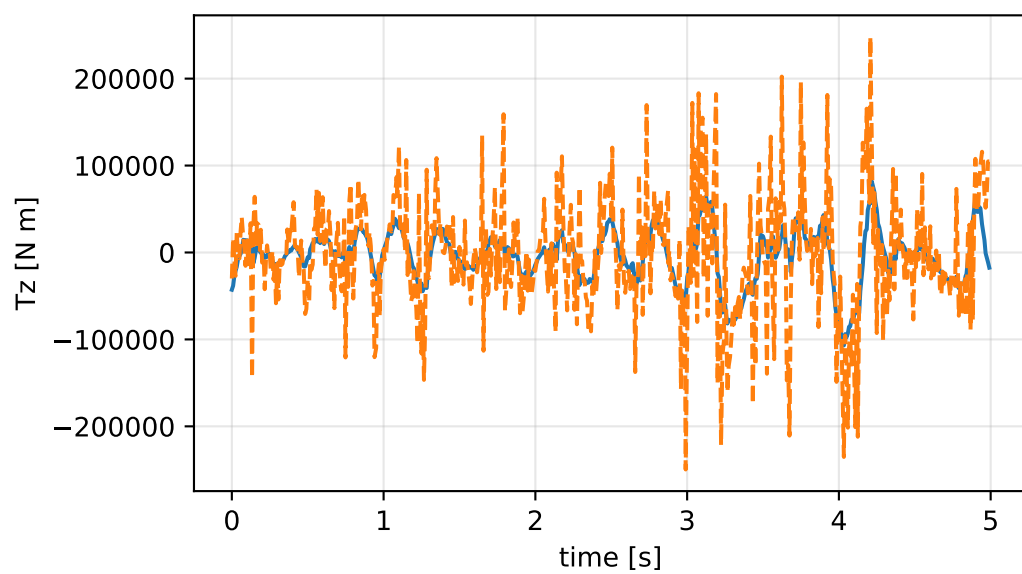
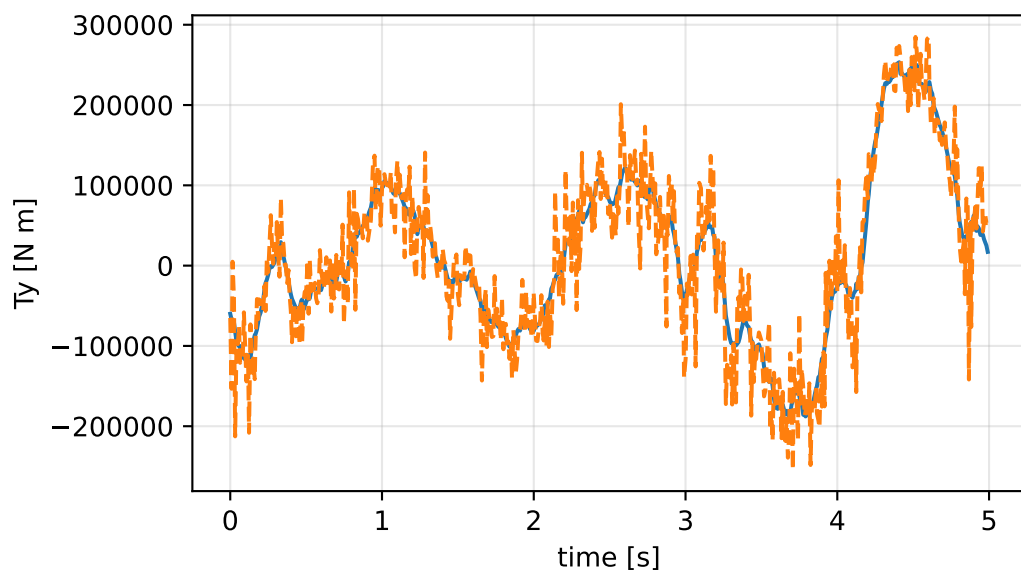
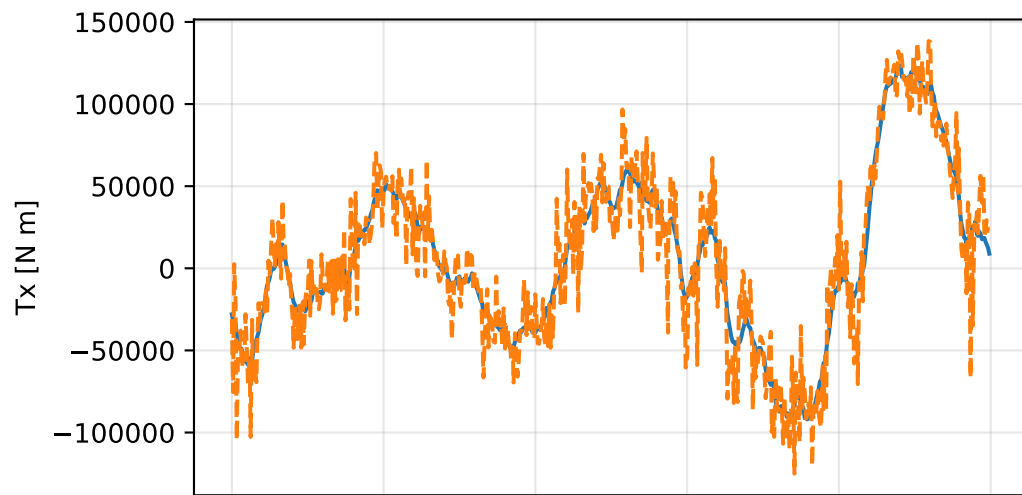
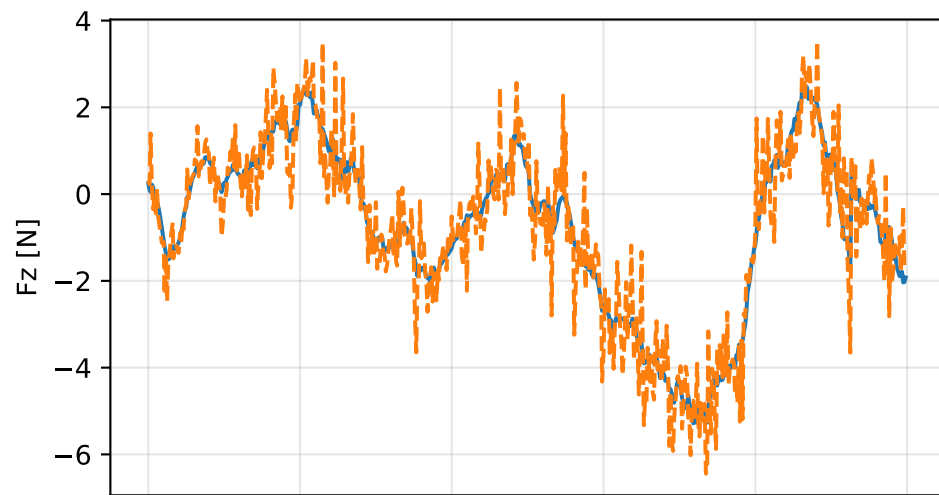



so3_naive_rotation_vector_derivatives: trajectory

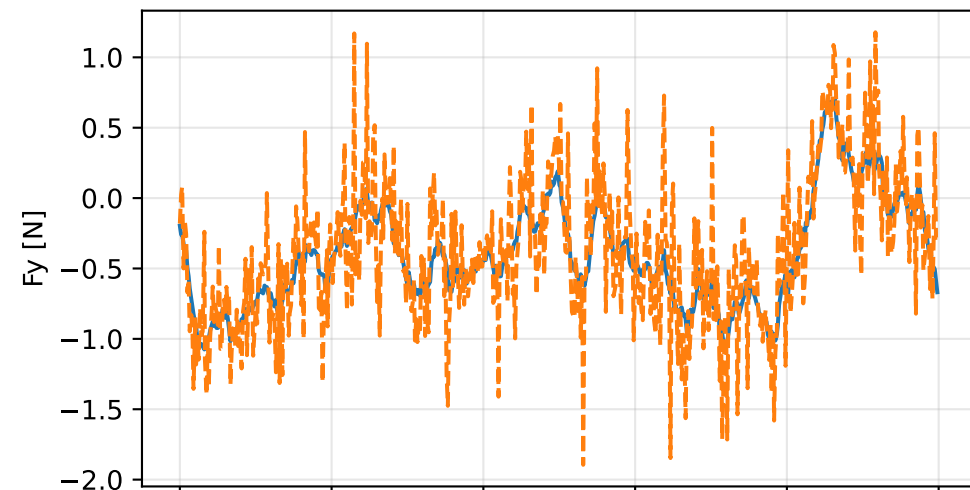

so3_naive_rotation_vector_derivatives: residual wrench

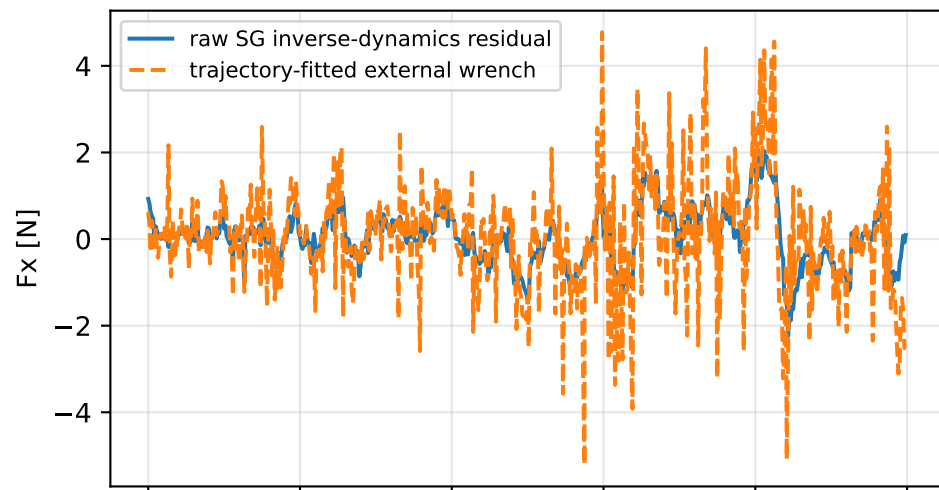

so3_naive_rotation_vector_derivatives: measured sensor comparison

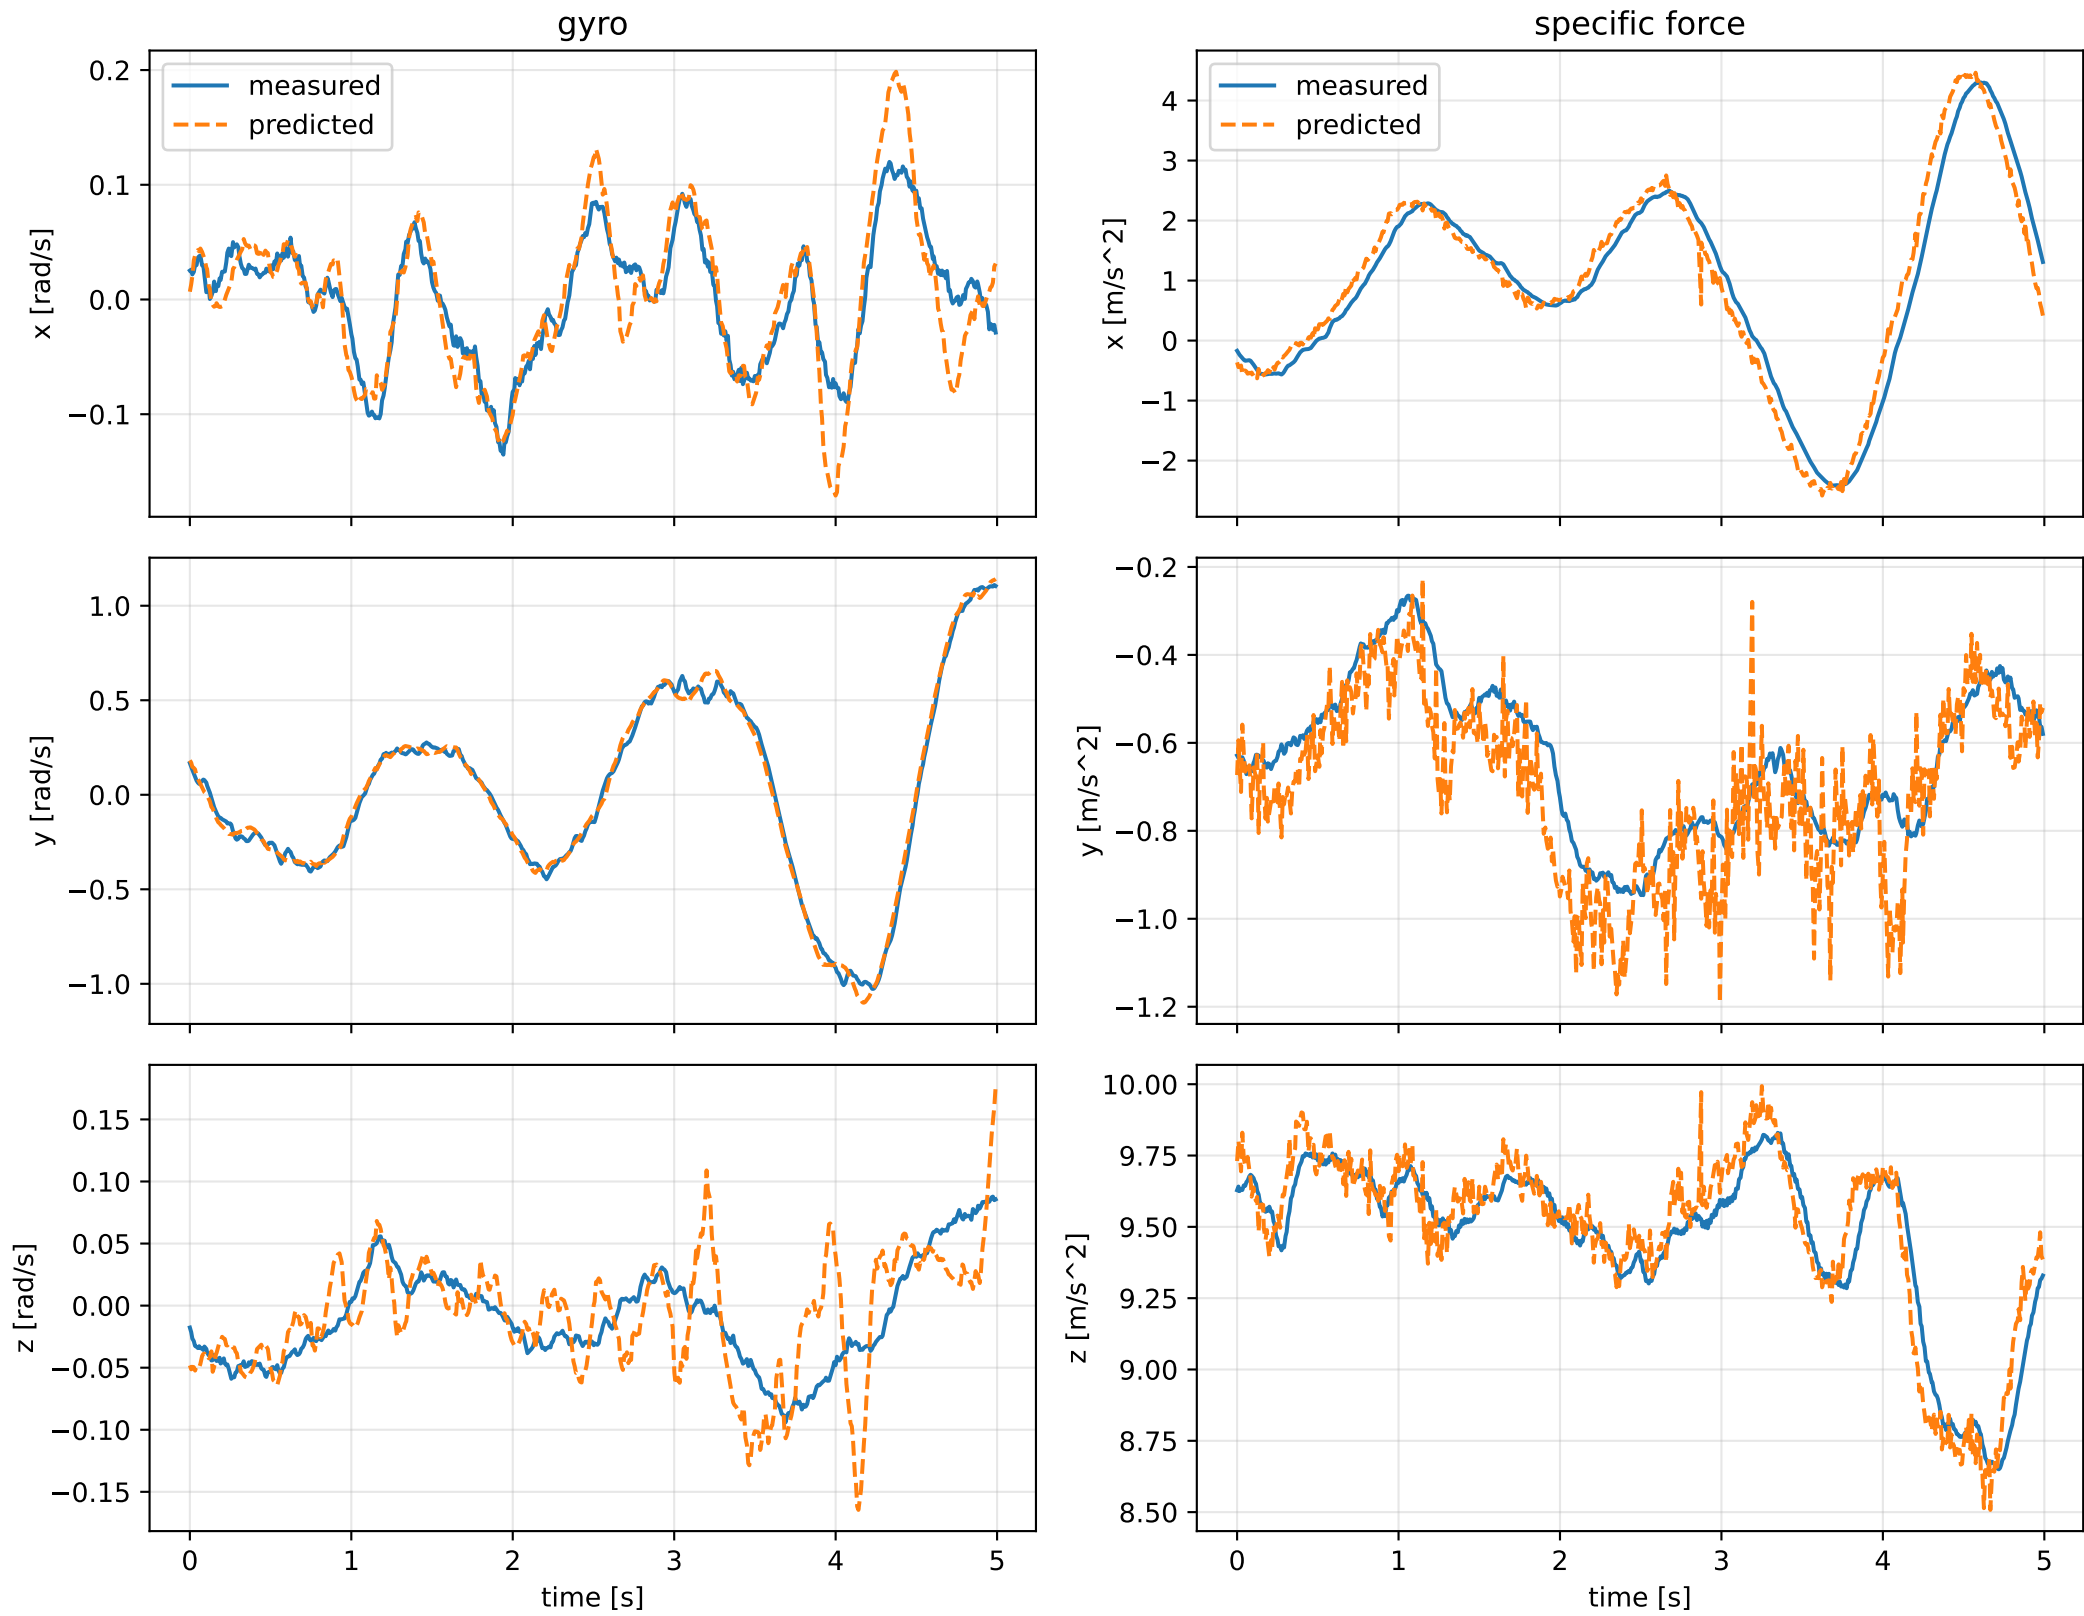

so3_naive_rotation_vector_derivatives: nominal -> estimated parameters

Case: so3_naive_rotation_vector_derivatives
status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 4.67253115 delta 2.32093355

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [13666.7994892 27871.7961304 -1720.433527] d=[13666.7344892 27871.7961304 -1720.433527]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [27871.7961304 57109.8822541 840.3739839] d=[27871.7961312 57109.8173441 840.3739839]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-1720.433527 840.3739839 70672.889791] d=[-1720.433546 840.3739839 70672.889791]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.0889315 0.201004 -0.0259666] d=[-0.0869068 0.2010345 -0.0259666]

rotor force effectiveness

[1. 1. 1. 1.] -> [7.8909474e-06 2.0390819e+00 3.4984829e+00 1.4506364e+00] d=[-0.9999921 1.0390819 2.4984829 0.4506364]

rotor lag [s] 0.103123779

gimbal lag [s] 0.0403608464