

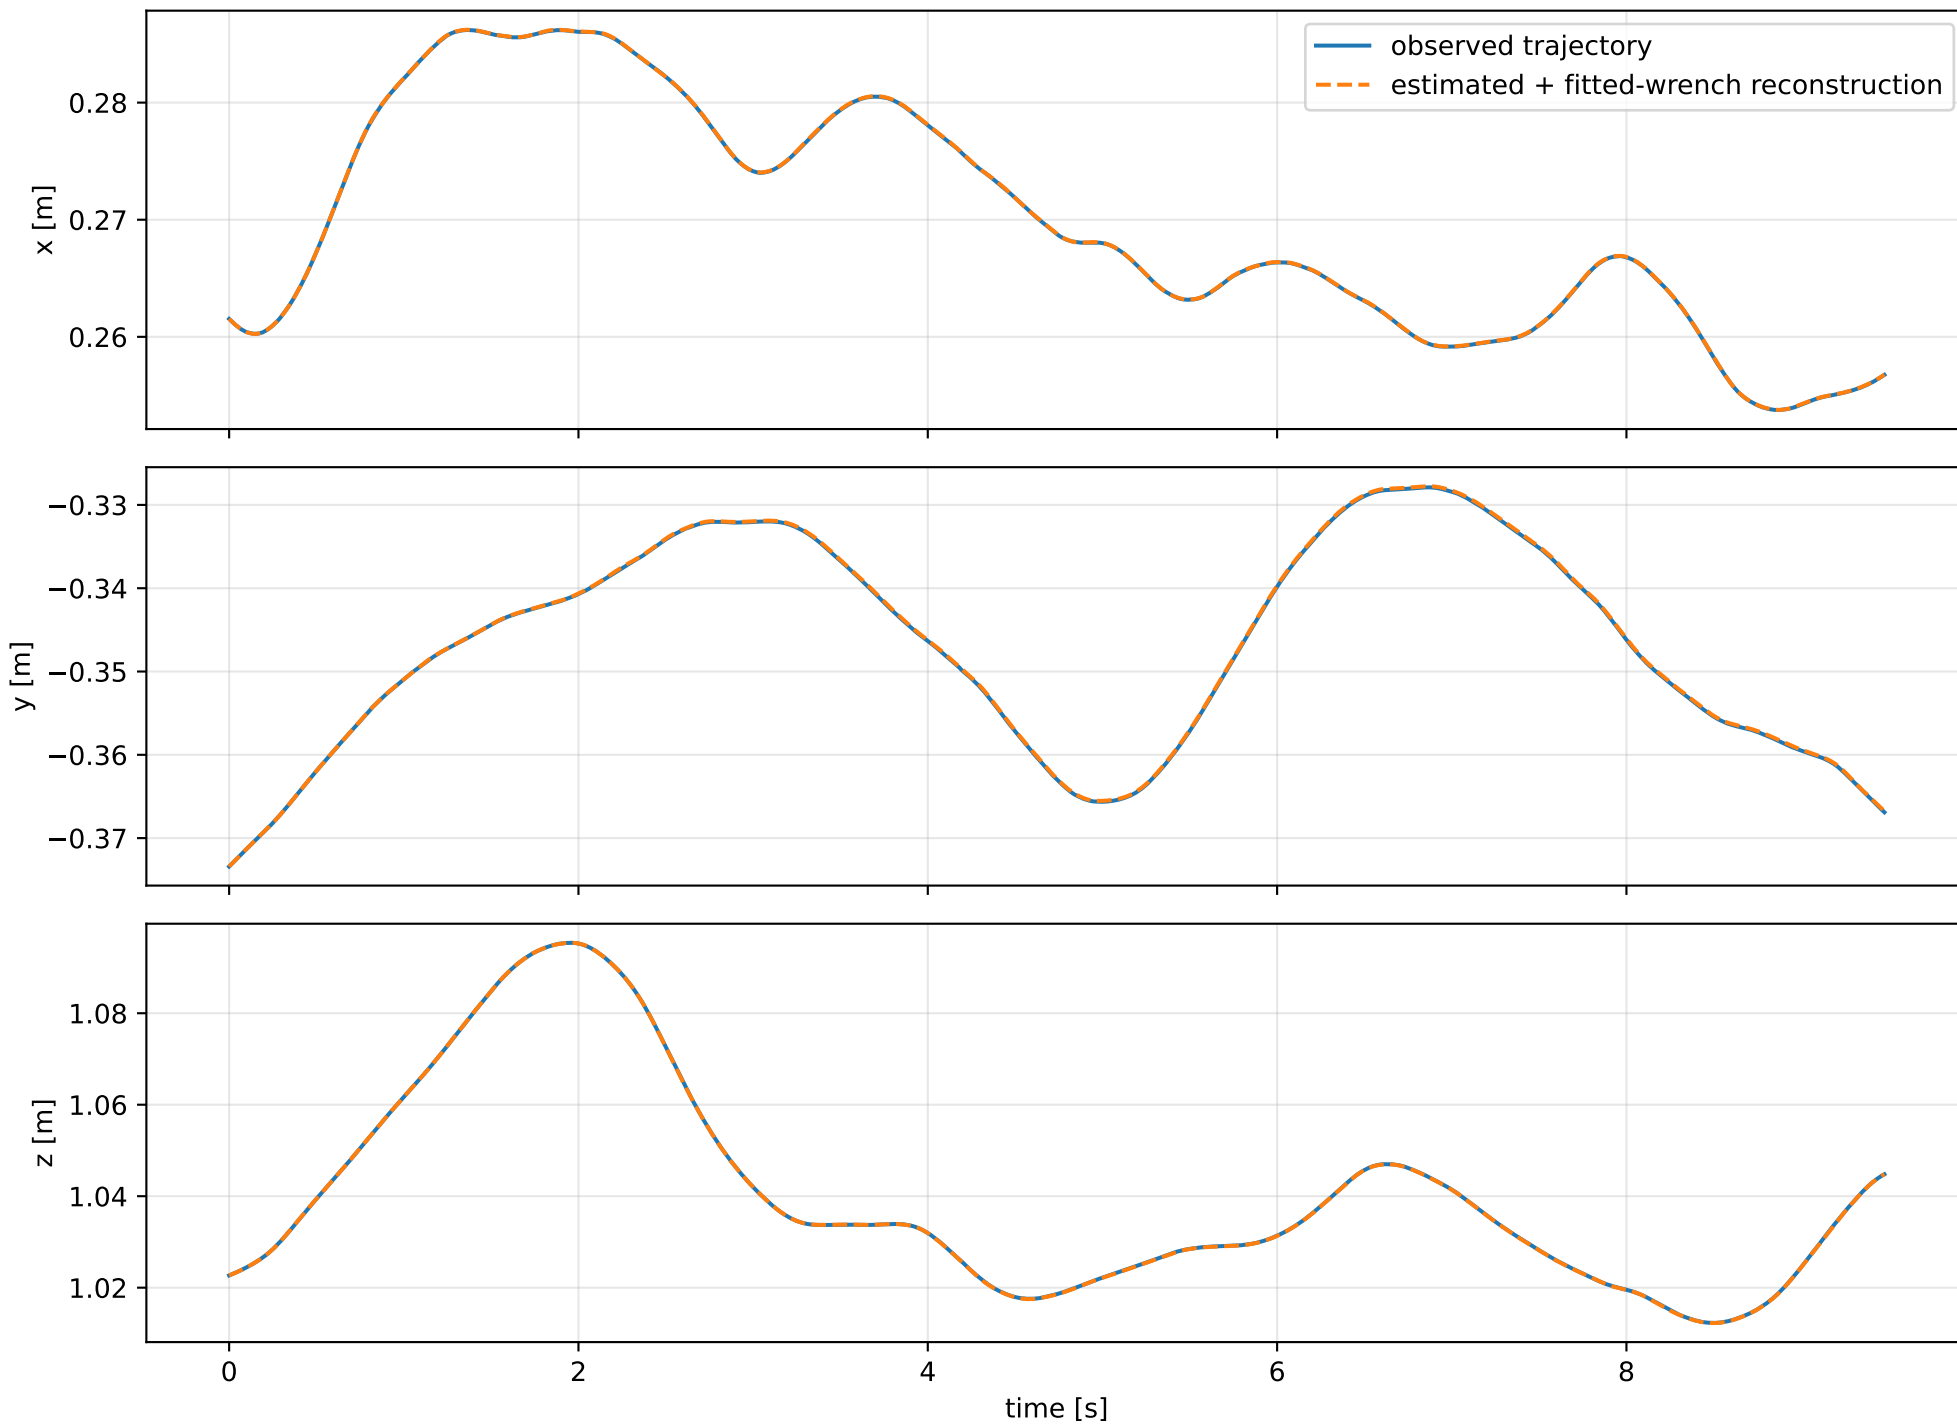
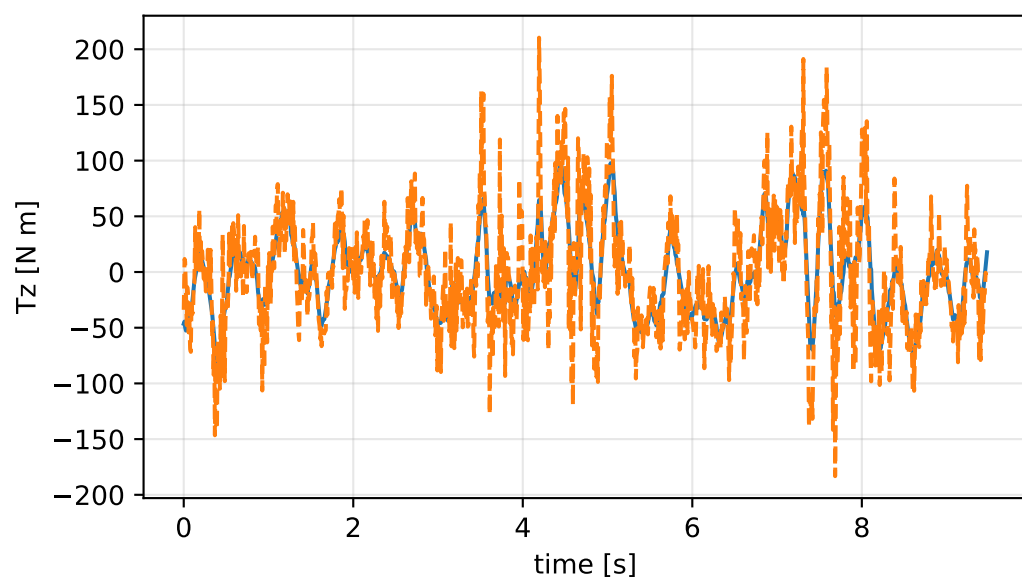
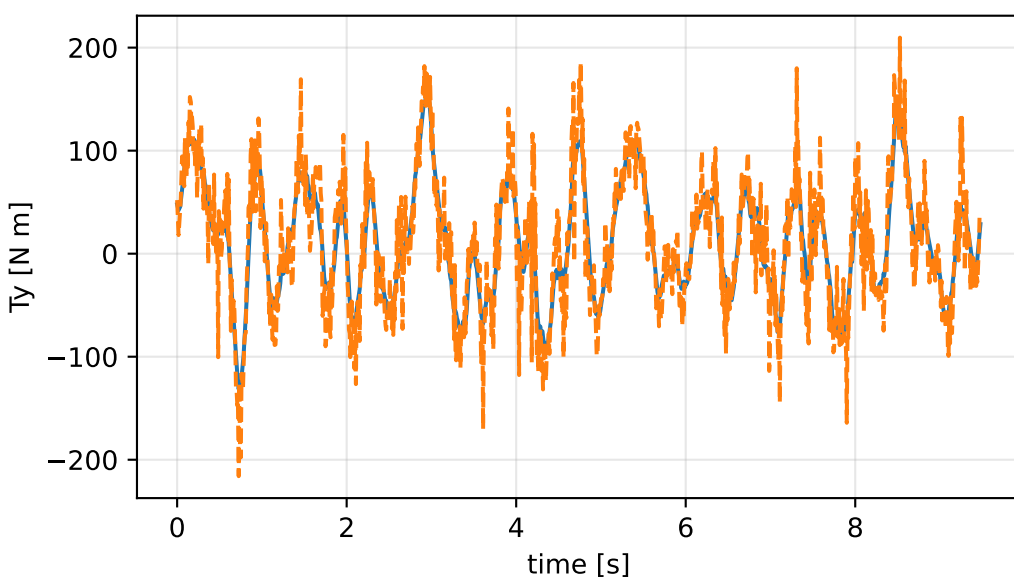
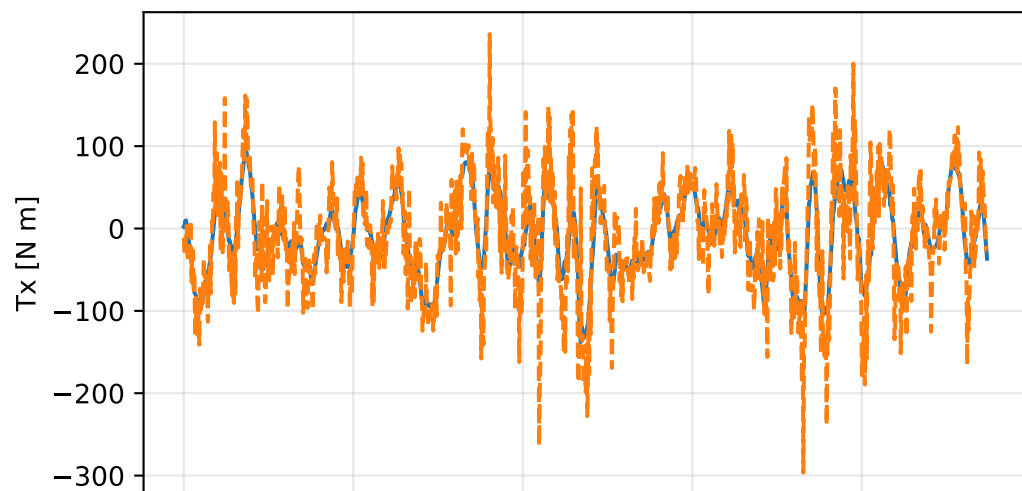
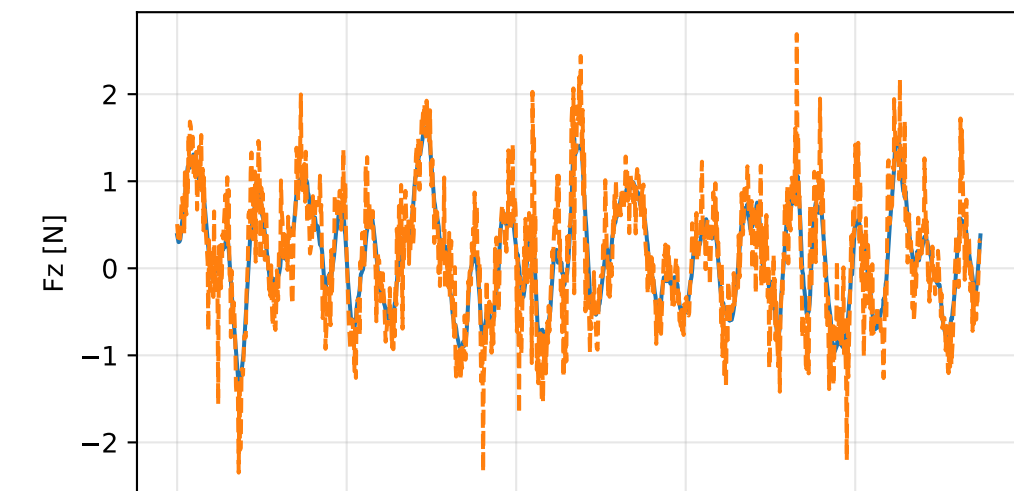


actuator_direct_command: trajectory

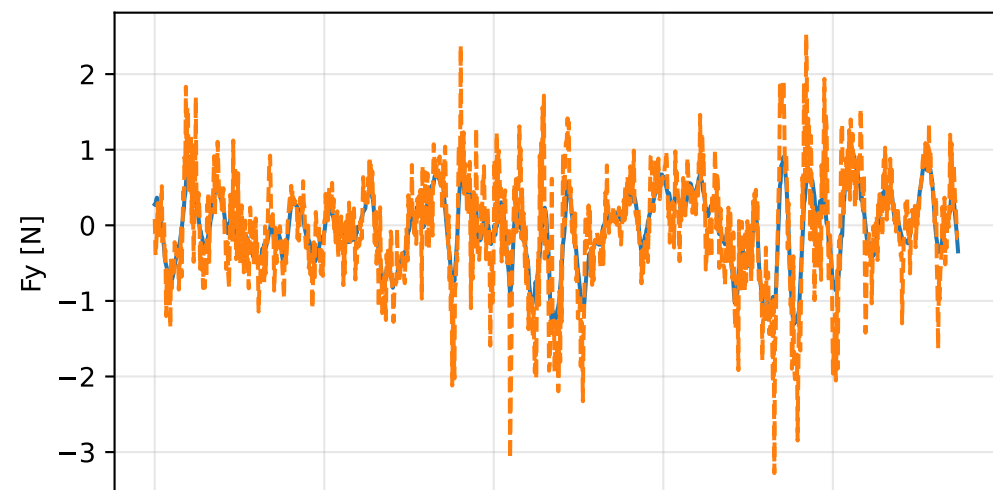


actuator_direct_command: residual wrench





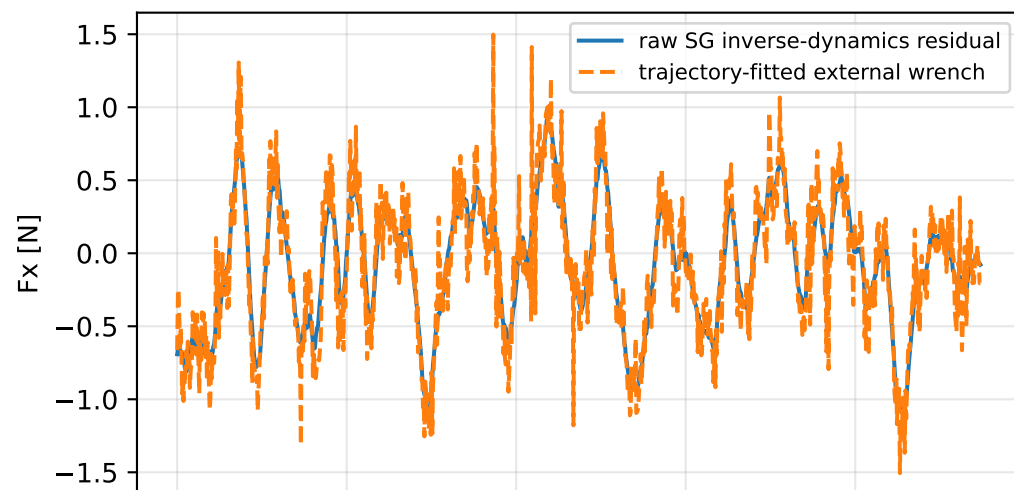


actuator_direct_command: measured sensor comparison

gyro

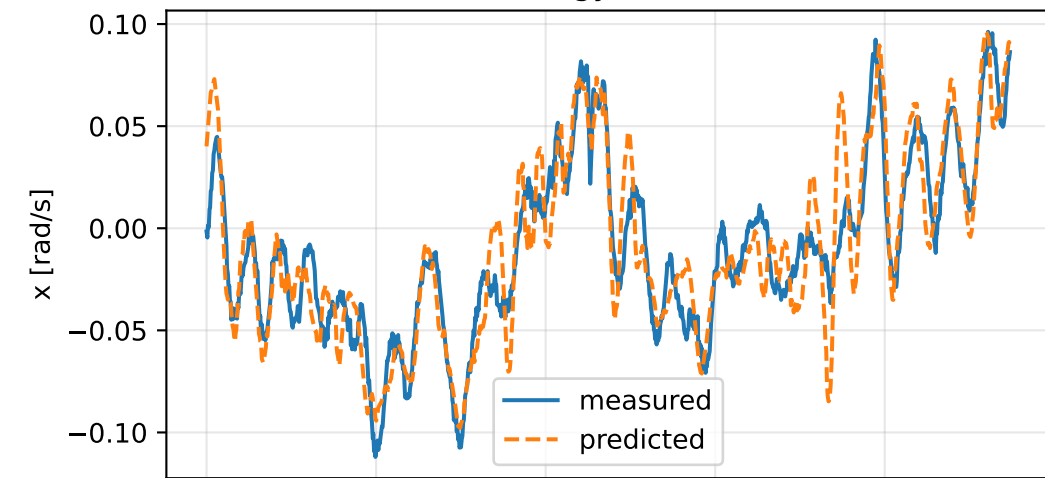

specific force

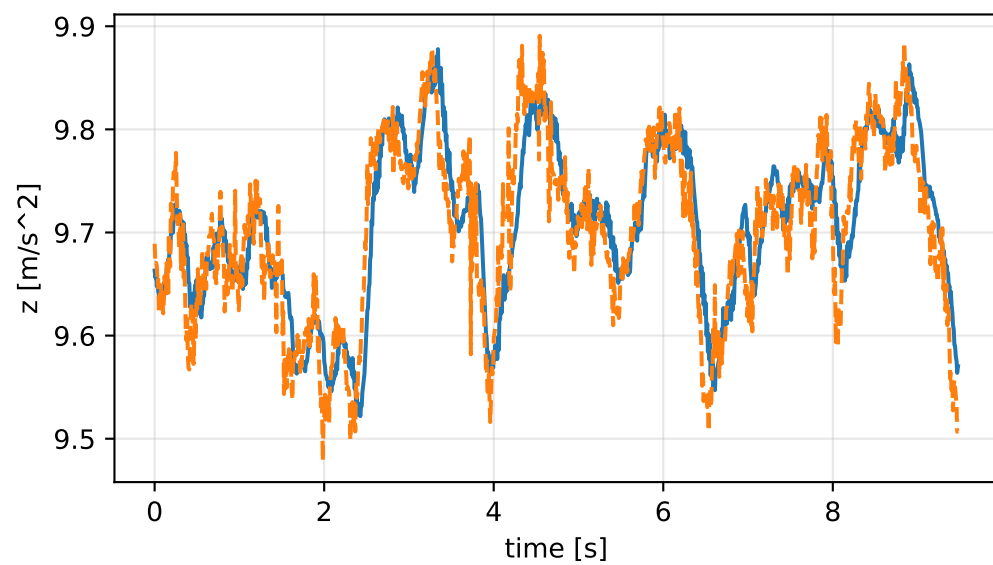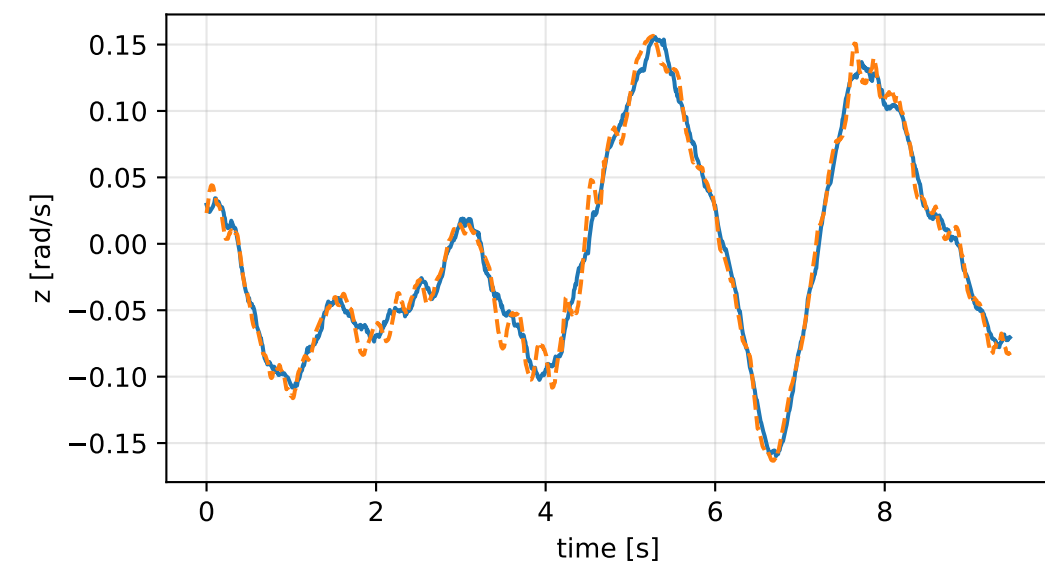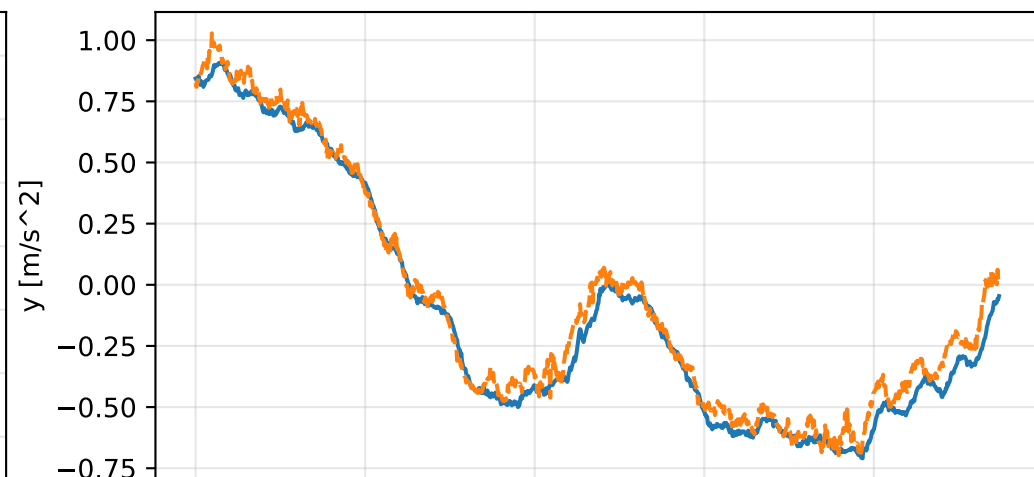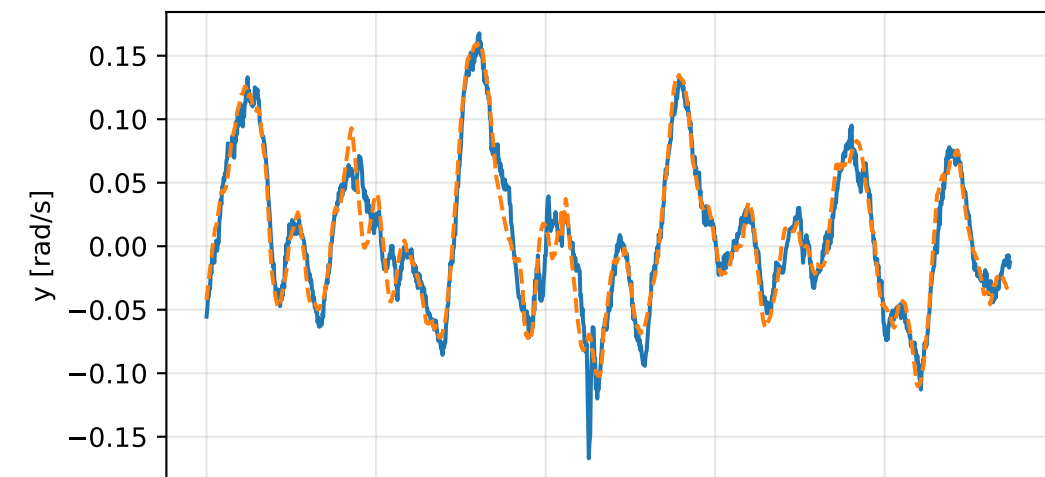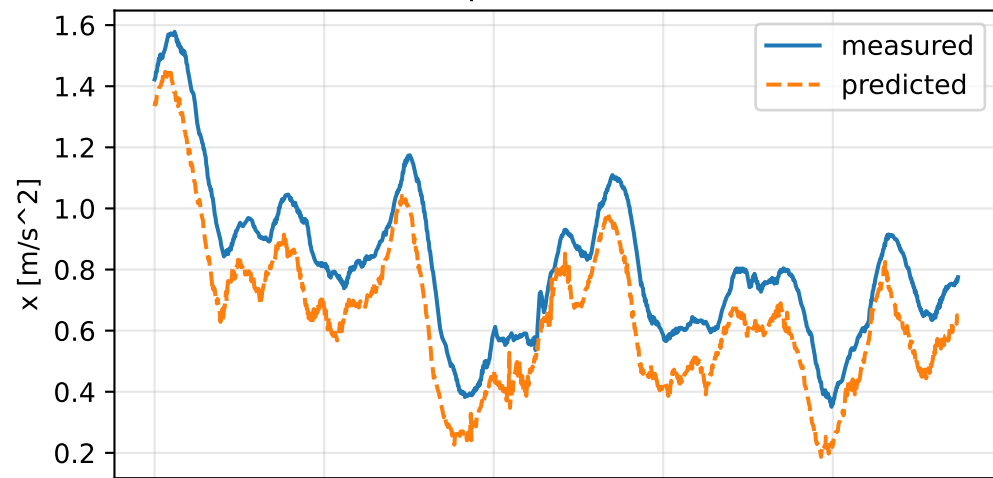

actuator_direct_command: nominal -> estimated parameters

Case: actuator_direct_command

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 1.02569845 delta -1.32589914

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [104.5930037 -62.854483 -68.0340517] d=[104.5280037 -62.8544823 -68.0340517]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [-62.854483 138.5055214 -52.0568083] d=[-62.8544823 138.4405688 -52.0568083]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-68.0340517 -52.0568083 130.2596803] d=[-68.0340708 -52.0568084 130.1306803]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-1.3146542 -0.9099542 -1.0763895] d=[-1.3126295 -0.9099230 -1.0763895]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.2190648 0.2325568 0.3954 0.5366273] d=[-0.7809352 -0.7674432 -0.6046 -0.4633727]

rotor lag [s] 0.199999884

gimbal lag [s] 0.0426188446