

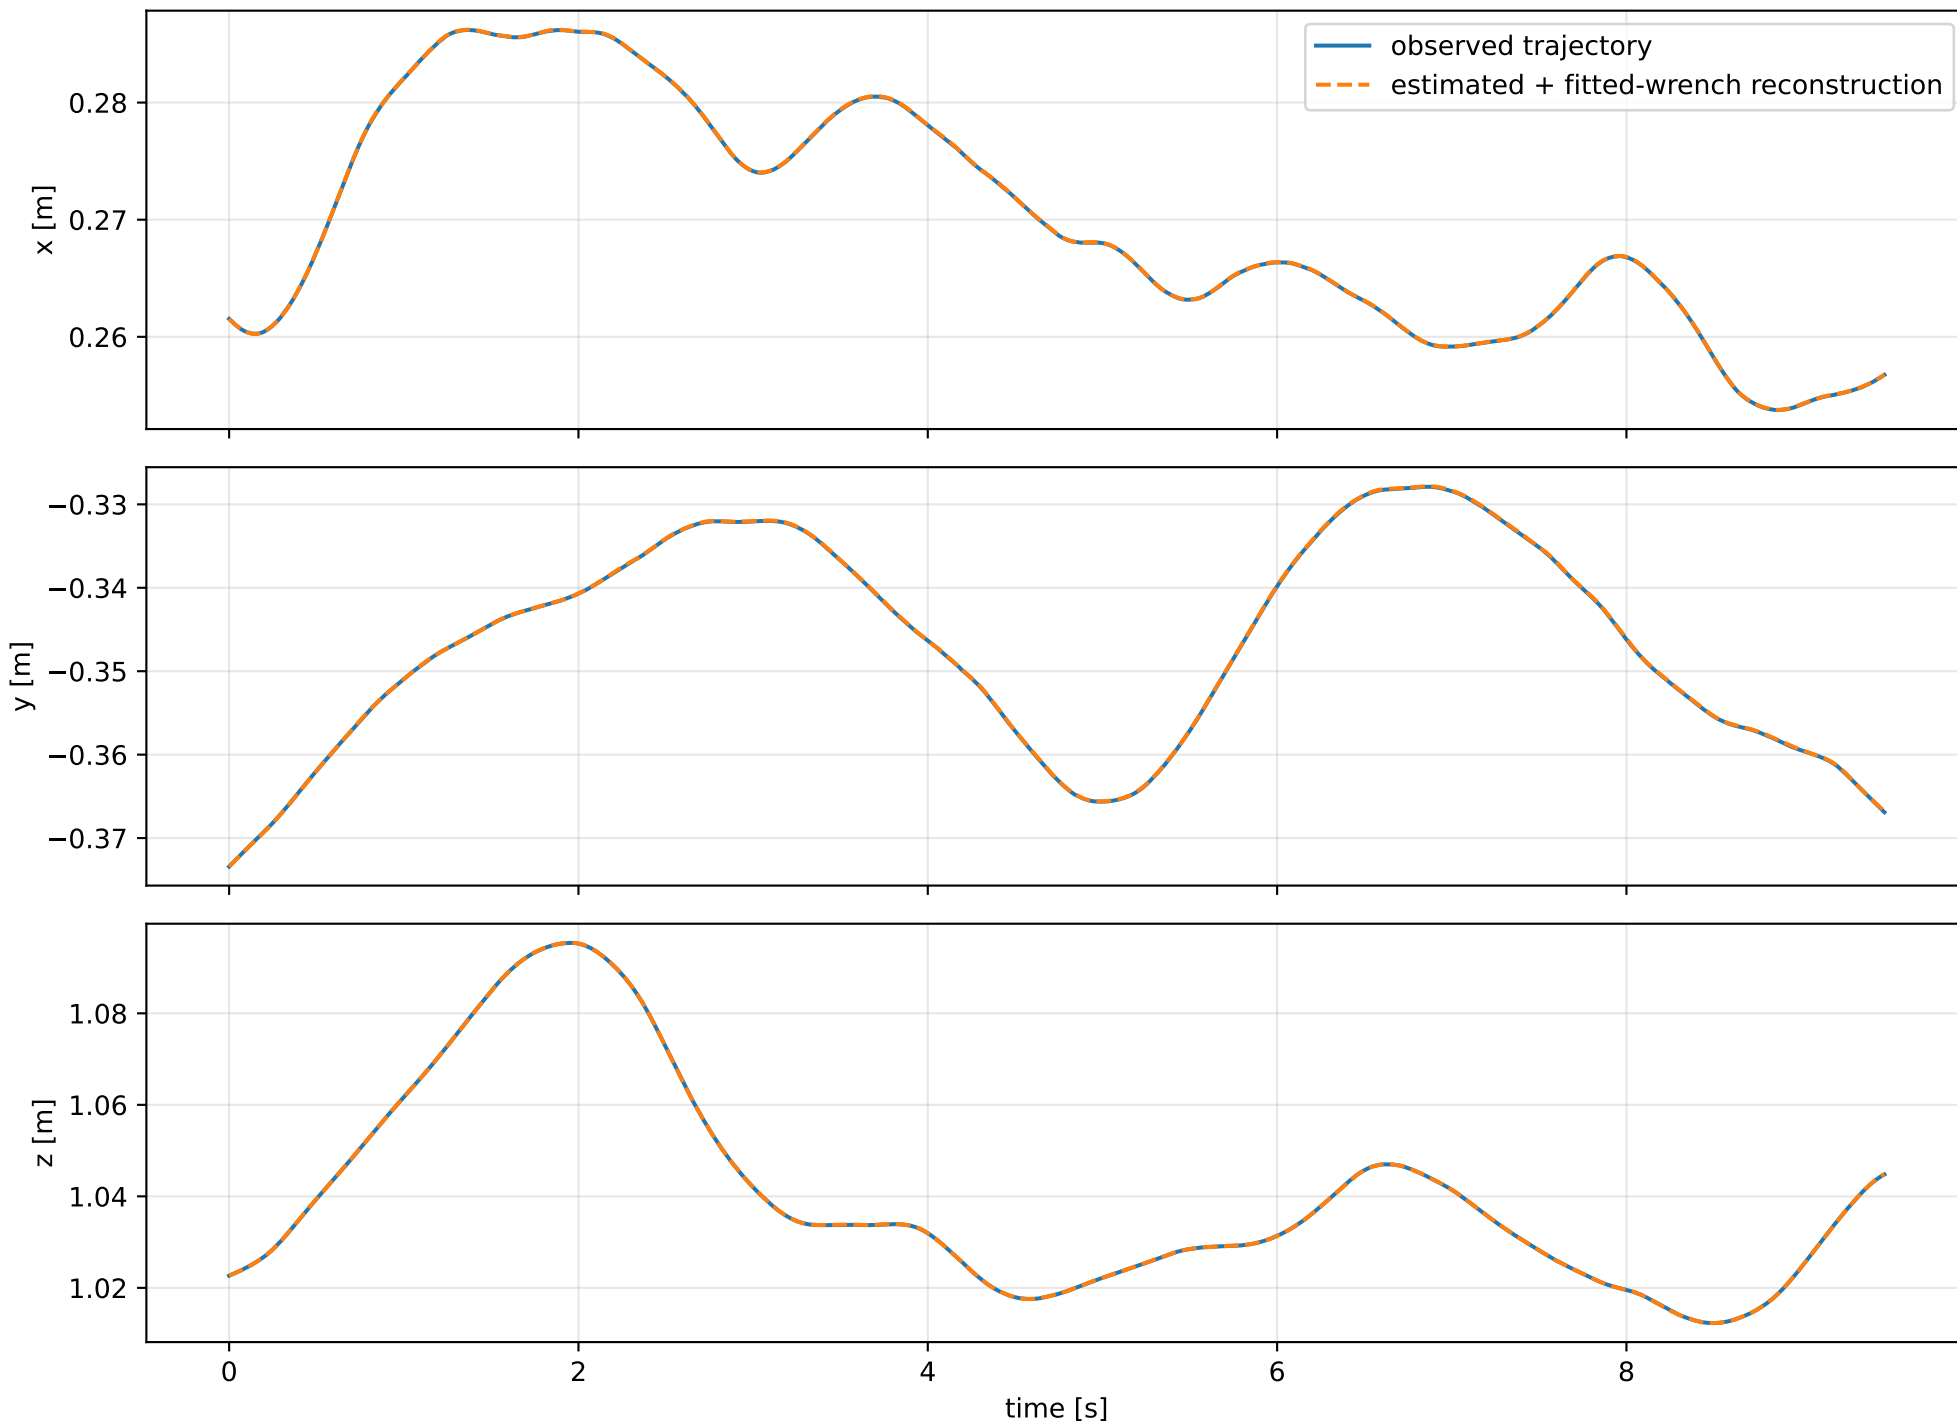
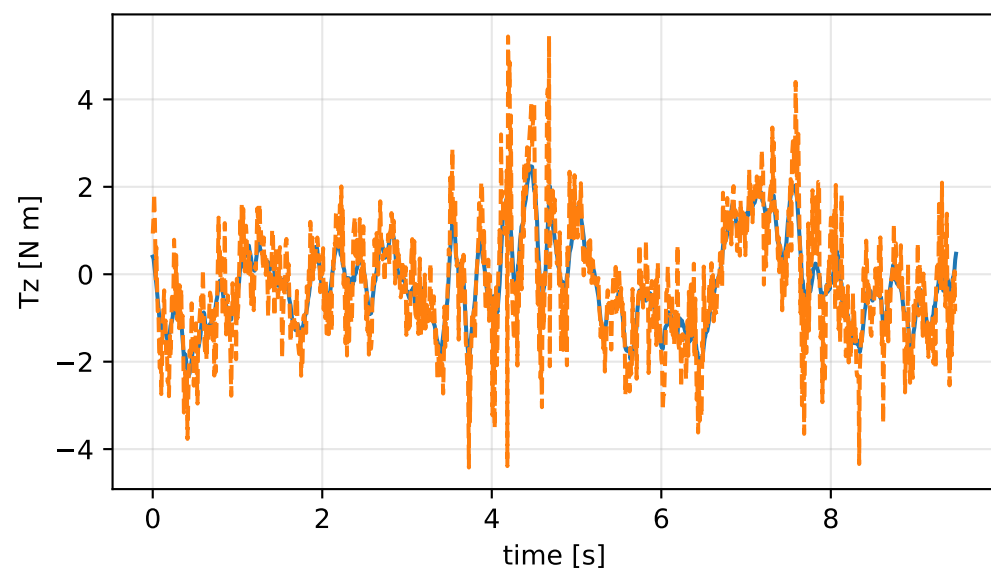
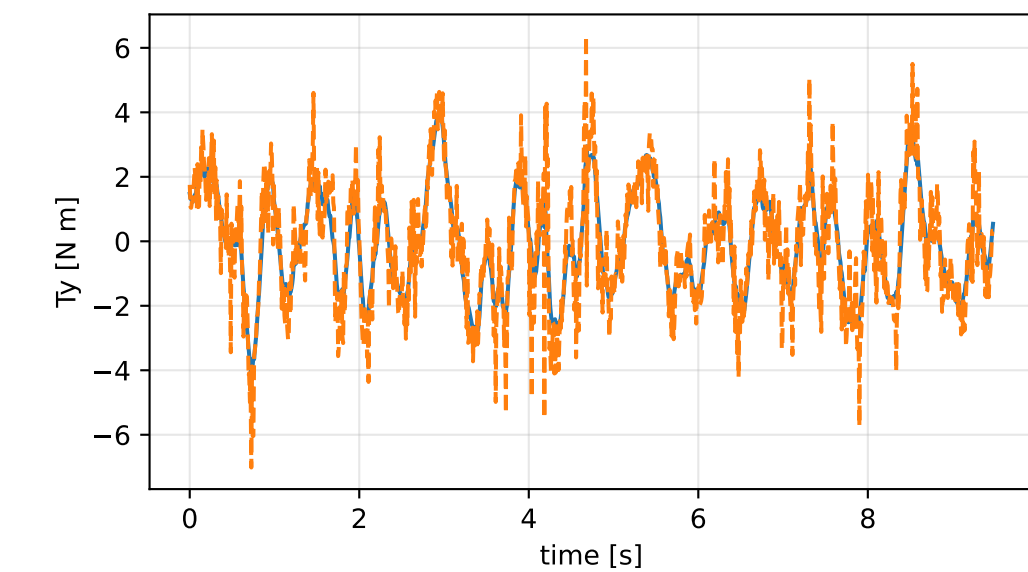
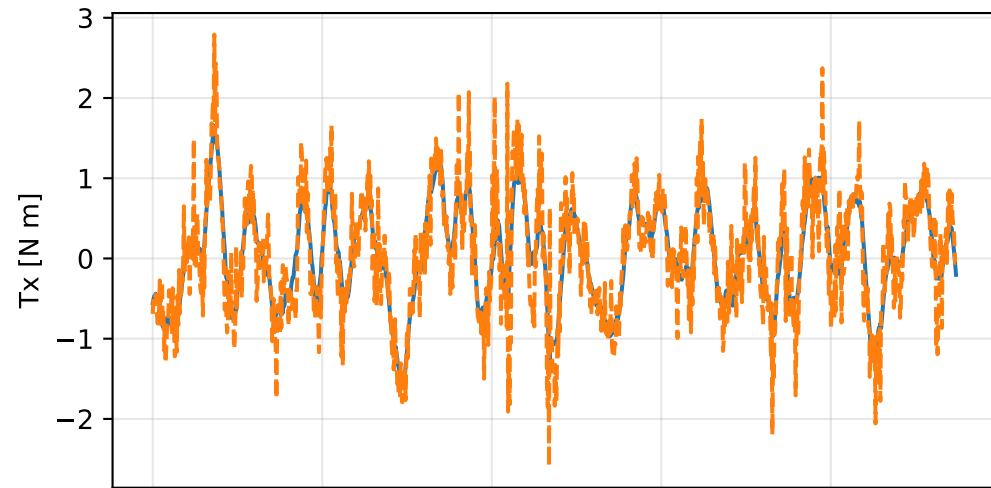
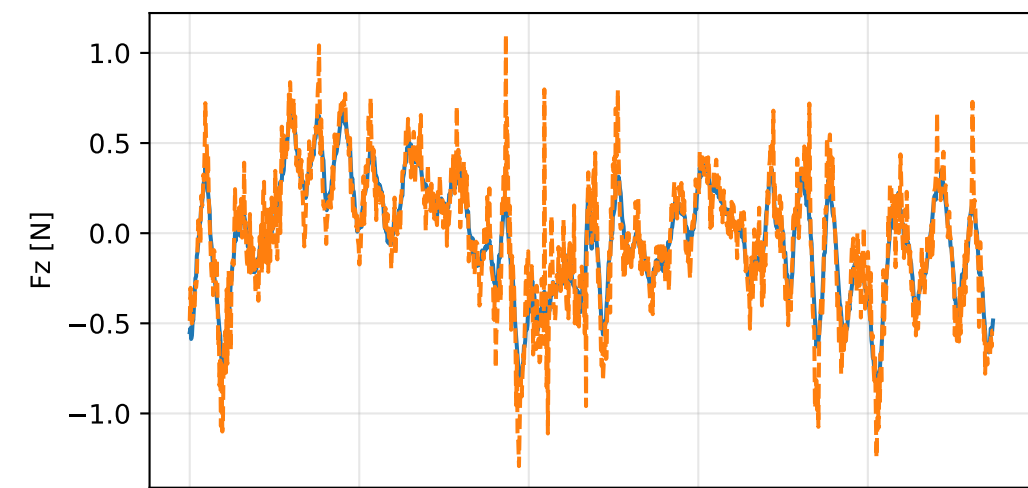


cov_diagonal: trajectory

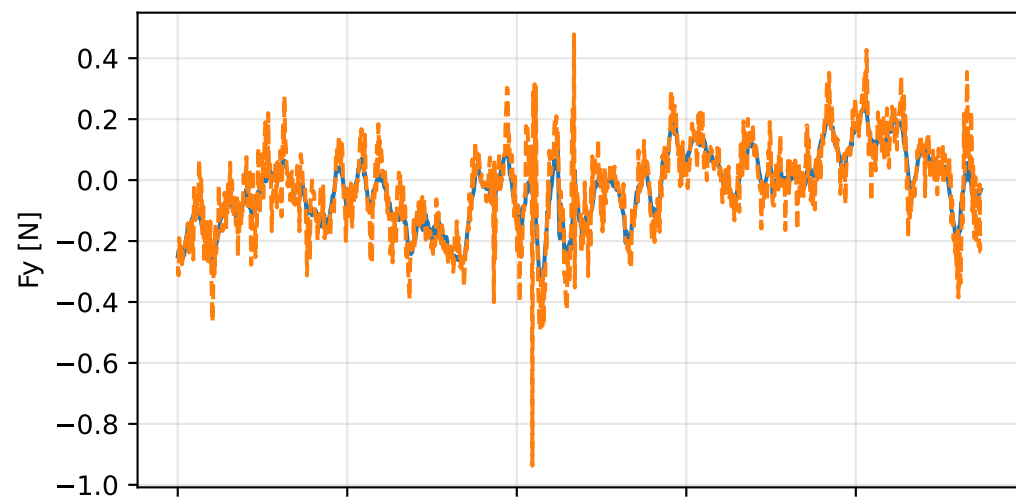


cov_diagonal: residual wrench





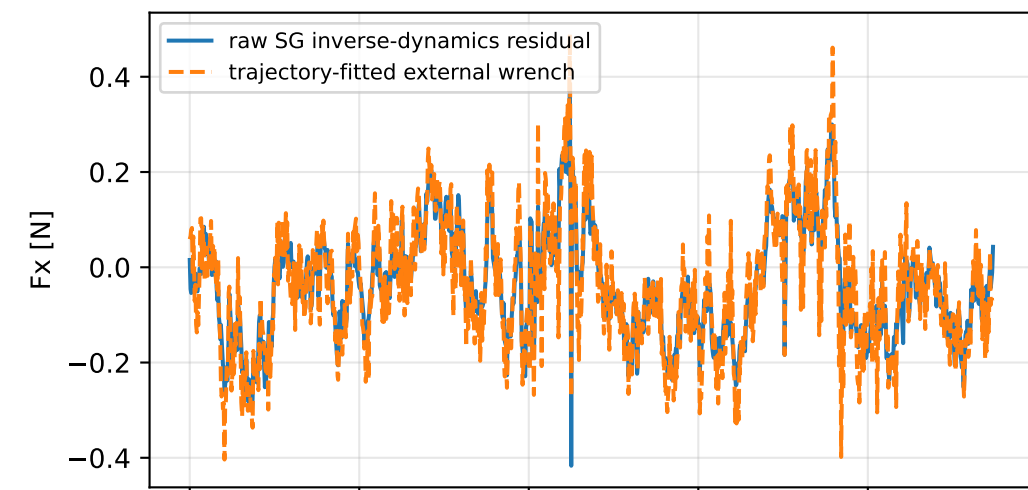


cov_diagonal: measured sensor comparison

gyro

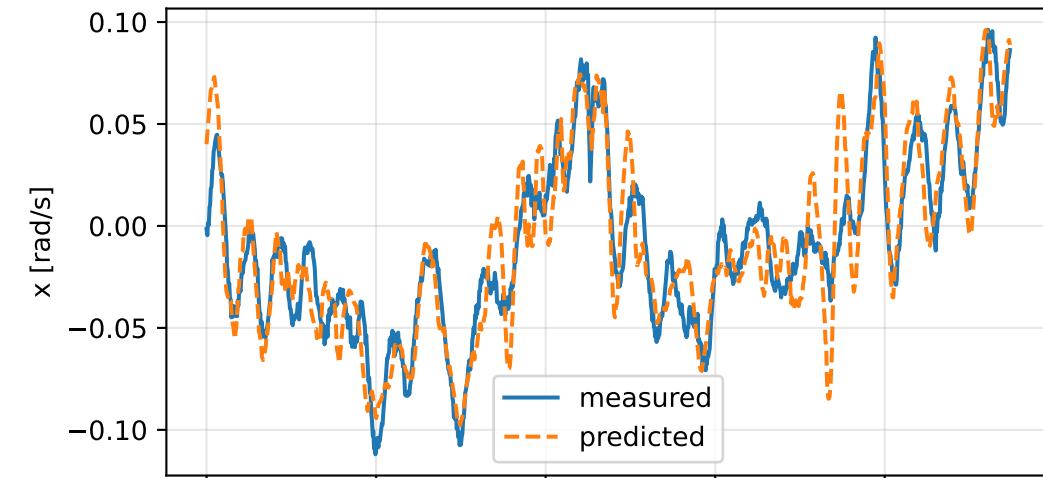

specific force

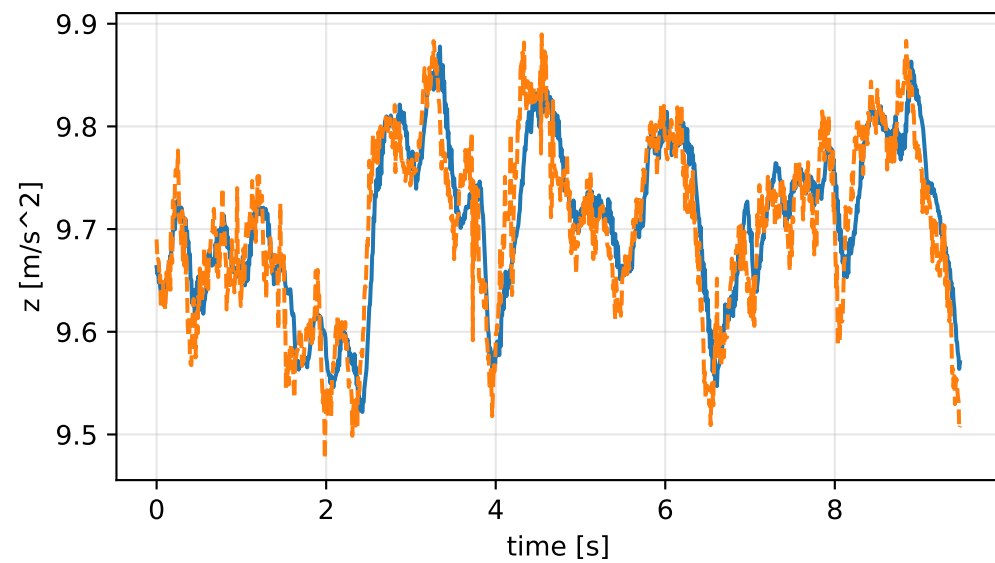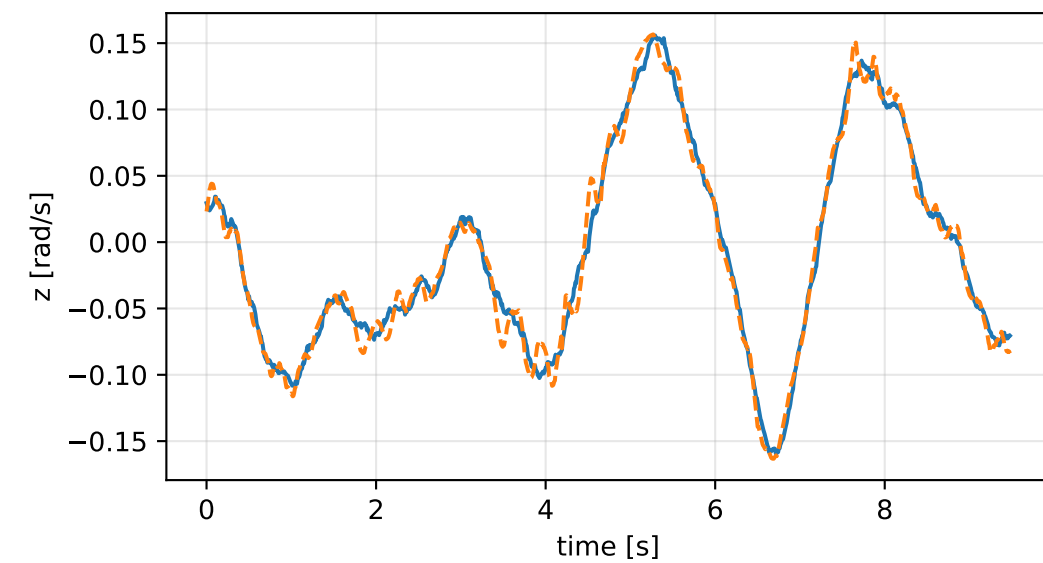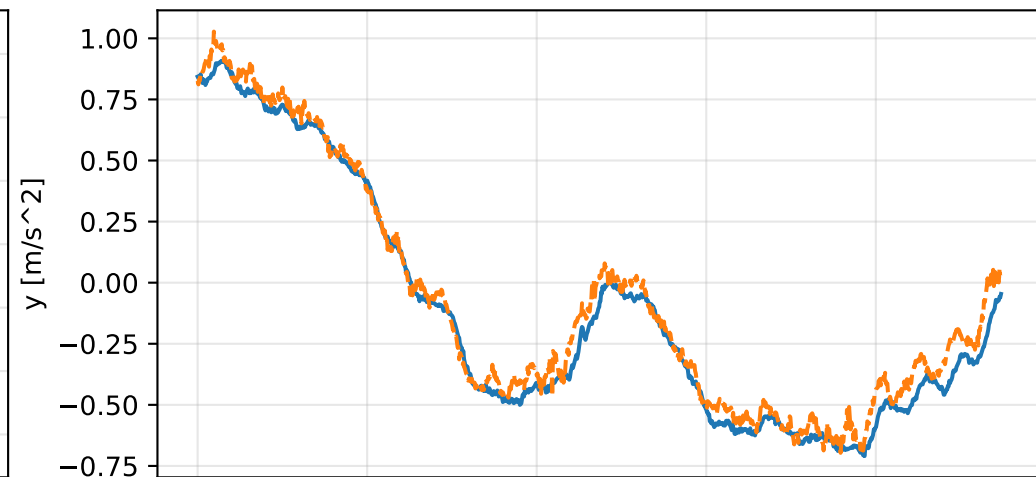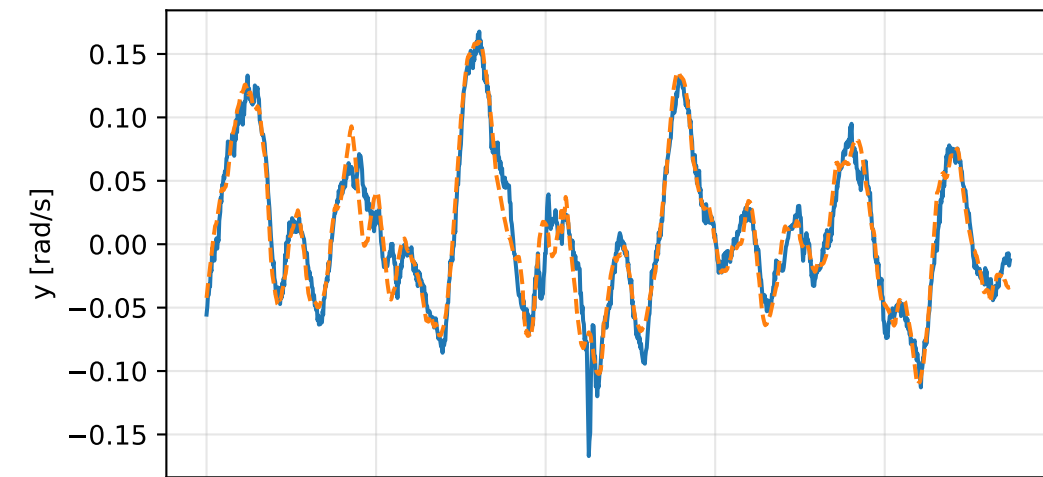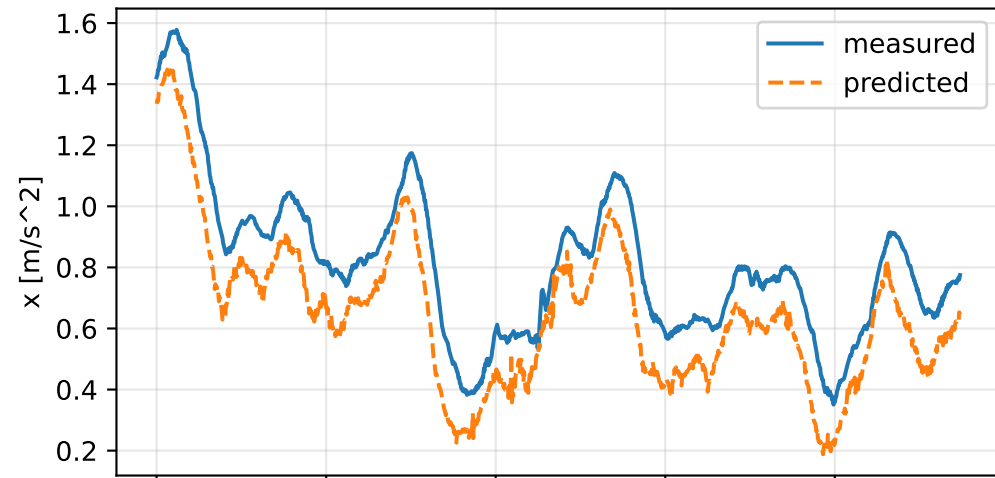

cov_diagonal: nominal -> estimated parameters

Case: cov_diagonal

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 3.18475161 delta 0.833154023

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [0.625665 -1.4690736 -0.209547] d=[0.560665 -1.4690728 -0.209566]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [-1.4690736 3.9736536 -0.1103165] d=[-1.4690728 3.9087009 -0.1103165]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-0.209547 -0.1103165 4.5271792] d=[-0.209566 -0.1103165 4.3981871]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [0.070488 -0.1423479 0.0275393] d=[0.0725127 -0.1423173

rotor force effectiveness

[1. 1. 1. 1.] -> [1.3809224 2.3618683 0.6678132 0.1313704] d=[0.3809224 1.3618683 -0.3321868 -0.8686296]

rotor lag [s] 0.170953897

gimbal lag [s] 0.0460992356