

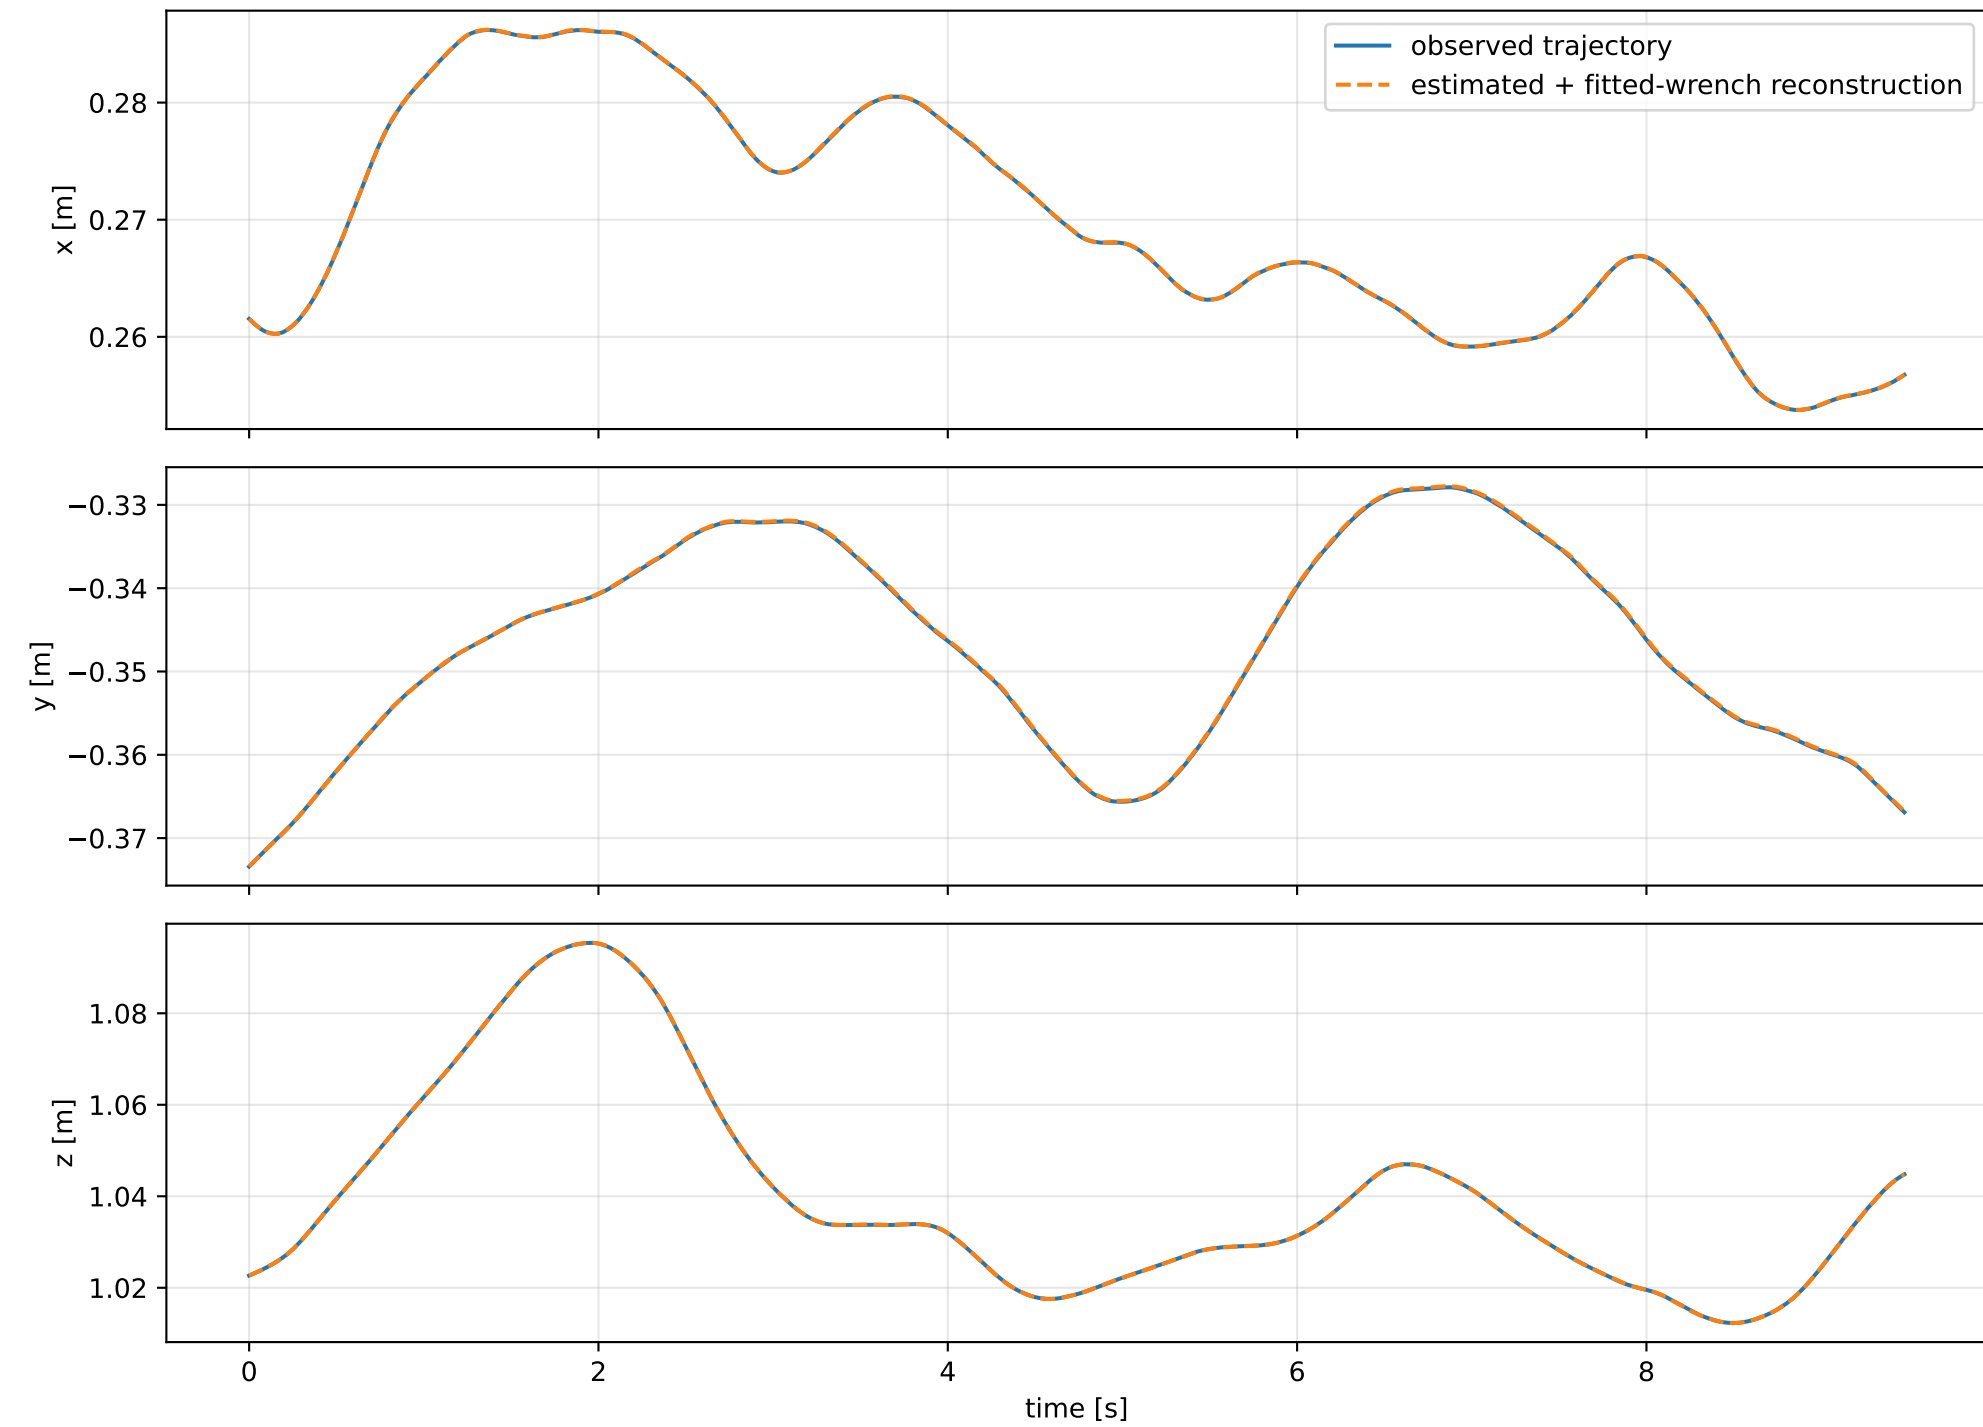
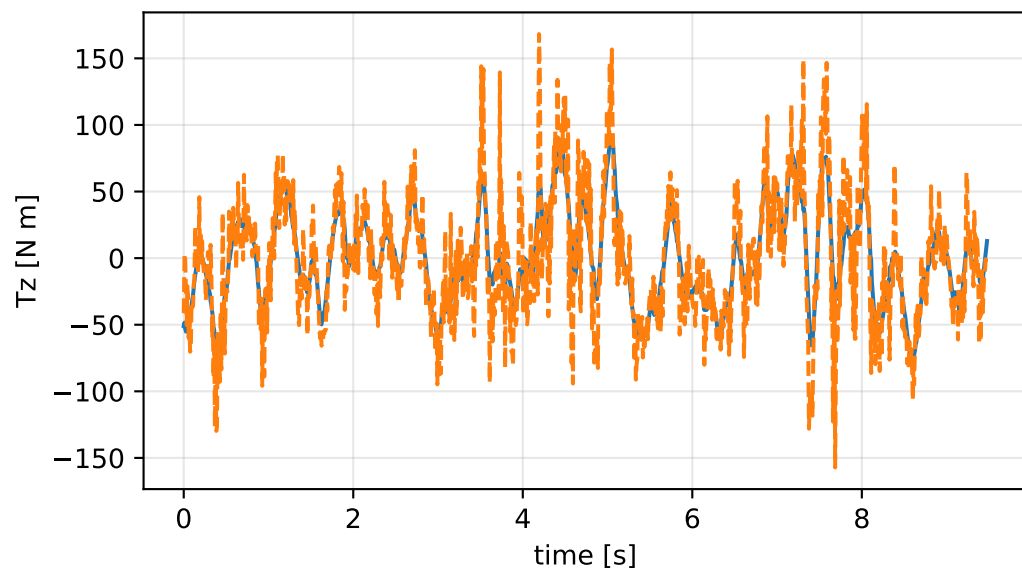
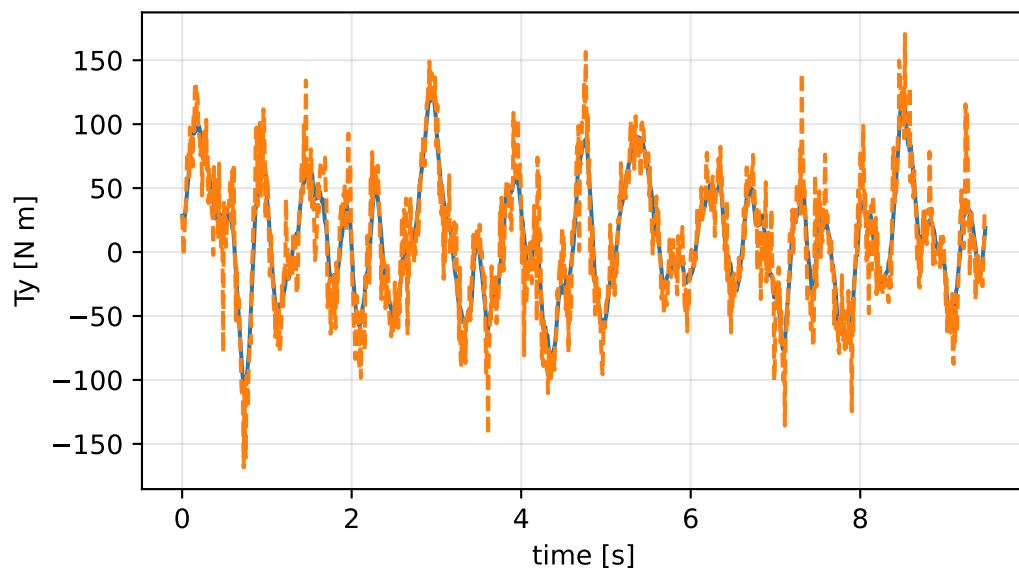
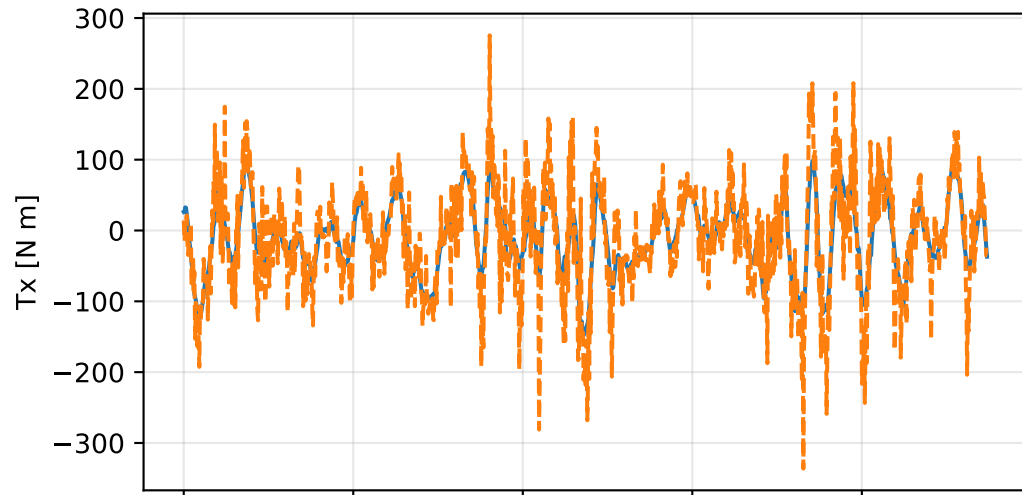
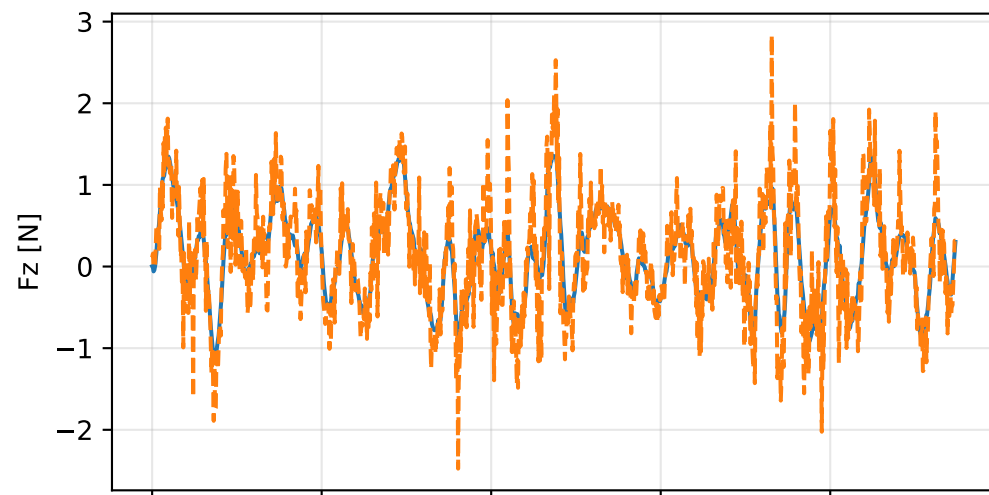


cov\_full\_no\_R\_uncertainty\_in\_s: trajectory

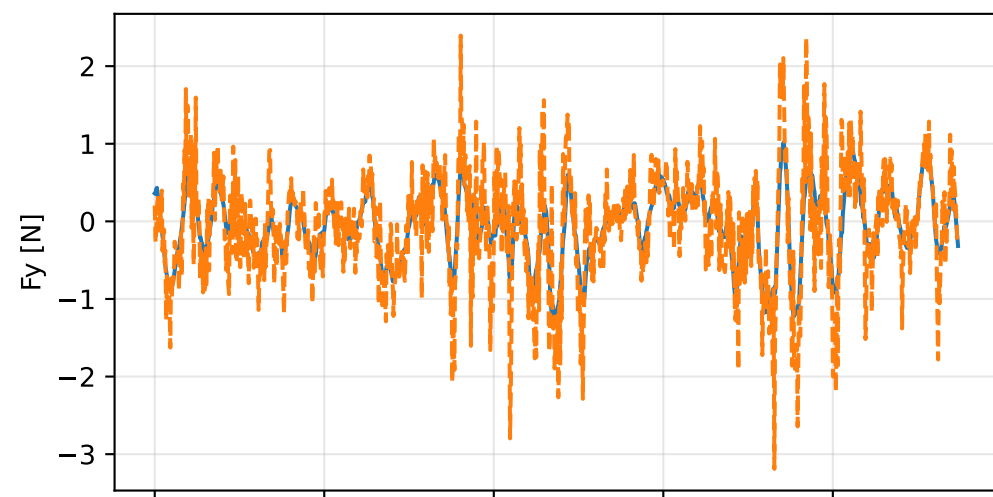


cov\_full\_no\_R\_uncertainty\_in\_s: residual wrench





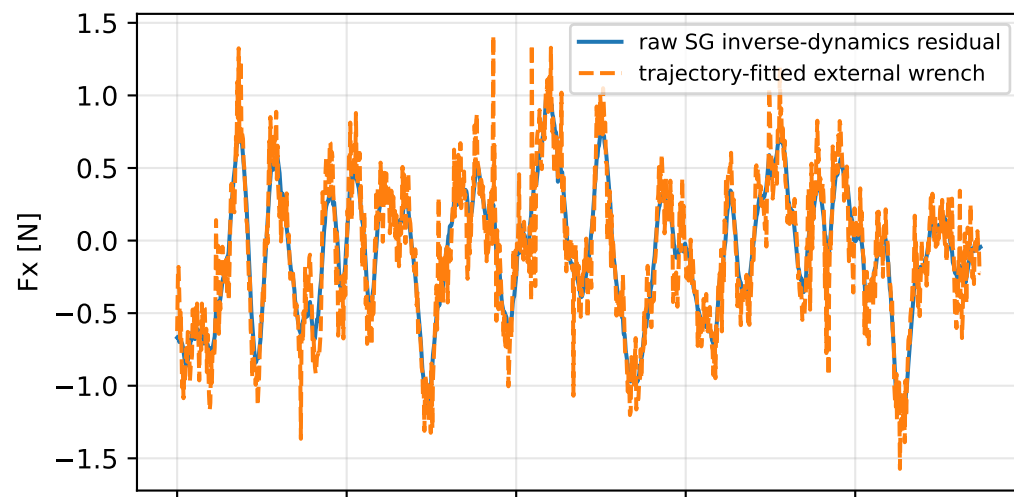


cov\_full\_no\_R\_uncertainty\_in\_s: measured sensor comparison

gyro

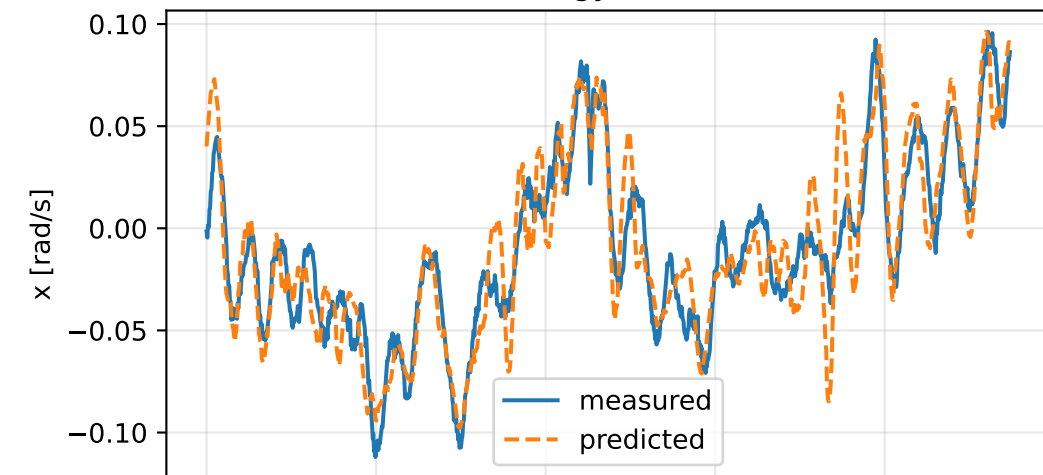

specific force

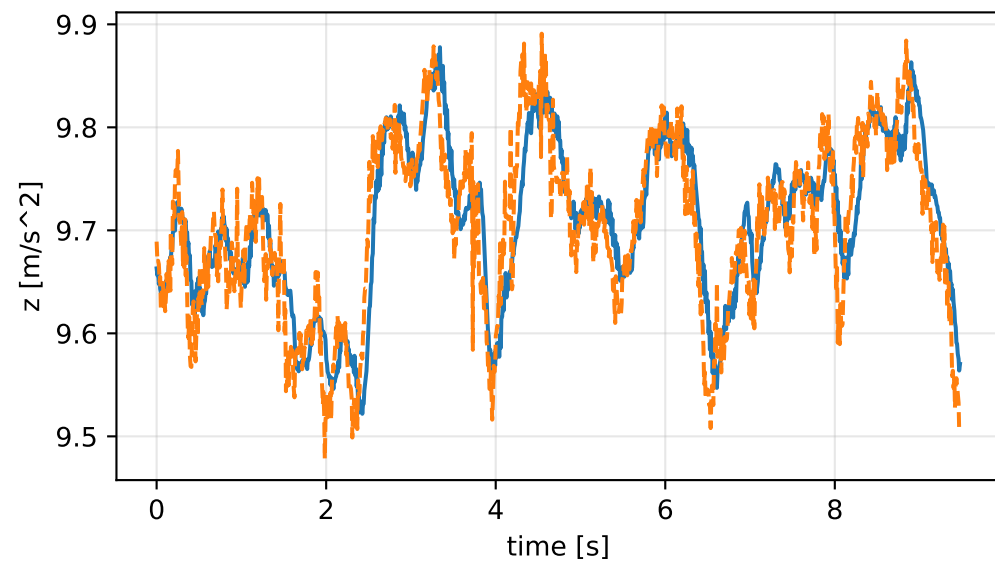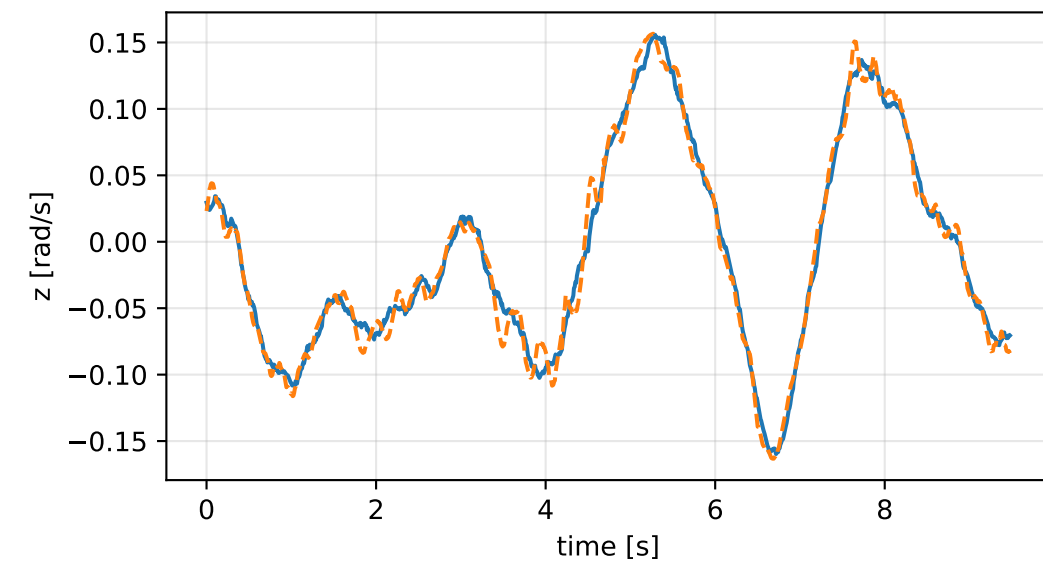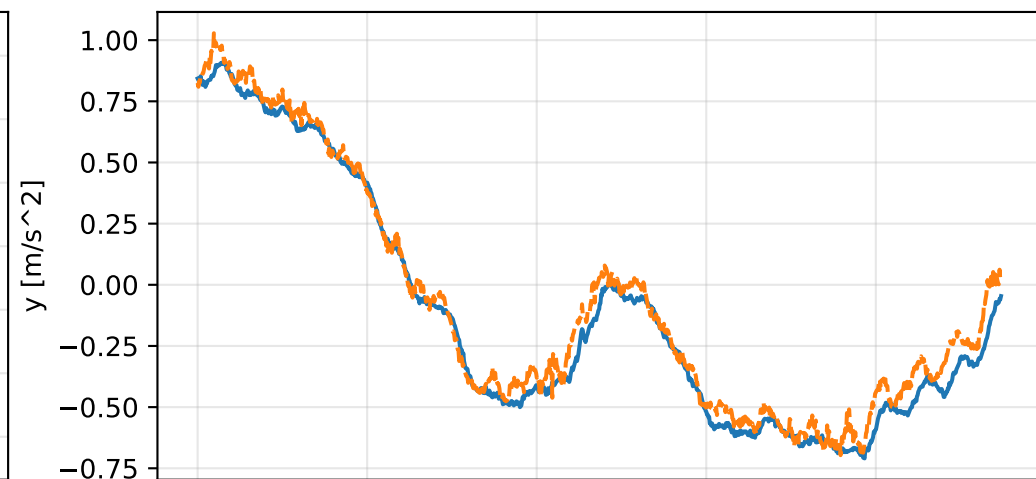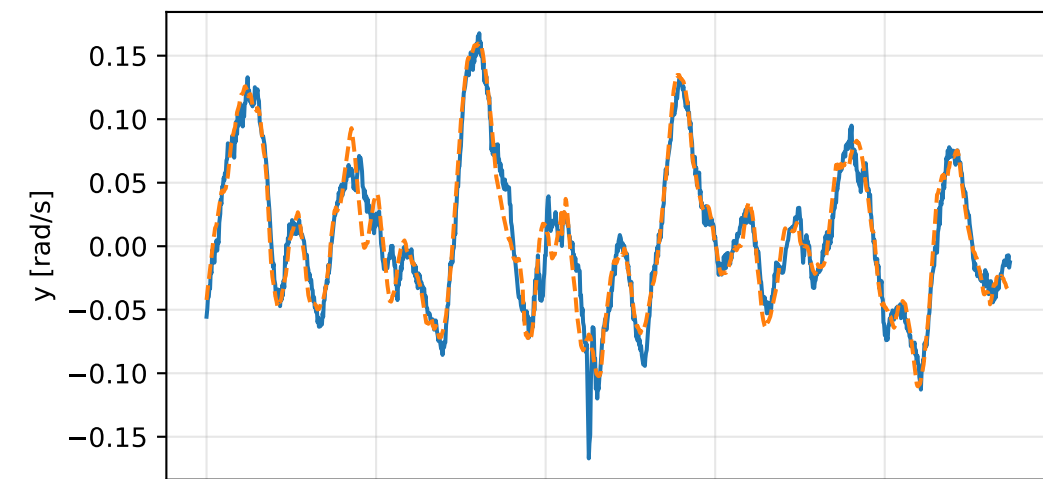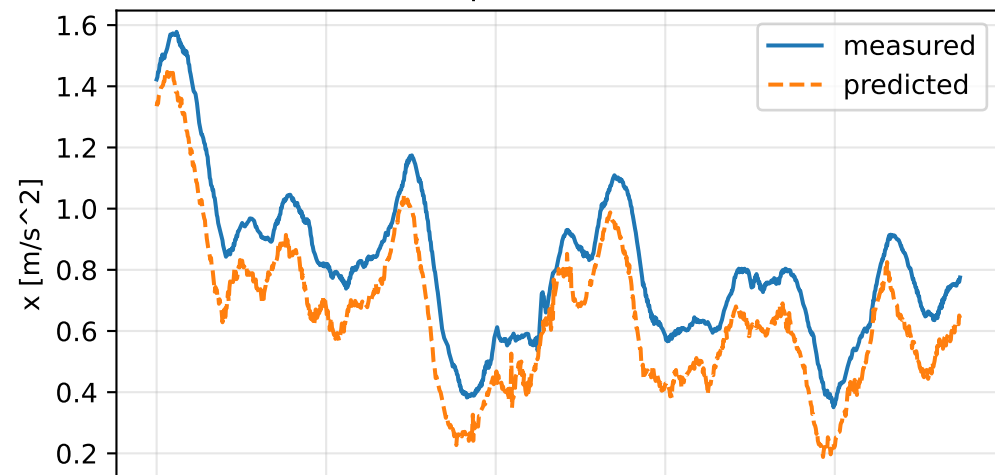

## cov\_full\_no\_R\_uncertainty\_in\_s: nominal -> estimated parameters

Case: cov\_full\_no\_R\_uncertainty\_in\_s  
status: completed (all stages completed)

mass [kg]            nominal 2.35159759    estimated 1.125934    delta -1.22566359

inertia [kg m^2] (nominal -> estimated; delta)

[ 6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [130.9808228 -56.5551315 -55.9715095]    d=[130.9158227 -56.5551307 -55.9715095]  
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [-56.5551315 113.2768186 -65.4842101]    d=[-56.5551307 113.211866 -65.4842101]  
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-55.9715095 -65.4842101 114.5791866]    d=[-55.9715285 -65.4842102 114.4501866]

CoG [m]            [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.917619 -0.9877724 -1.0286602]    d=[-0.9155943 -0.9877419 -1.0286602]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.2931924 0.3000758 0.3779924 0.5532776]    d=[-0.7068076 -0.6999242 -0.6220076 -0.4467224]

rotor lag [s] 0.199999999

gimbal lag [s] 0.0365223092