

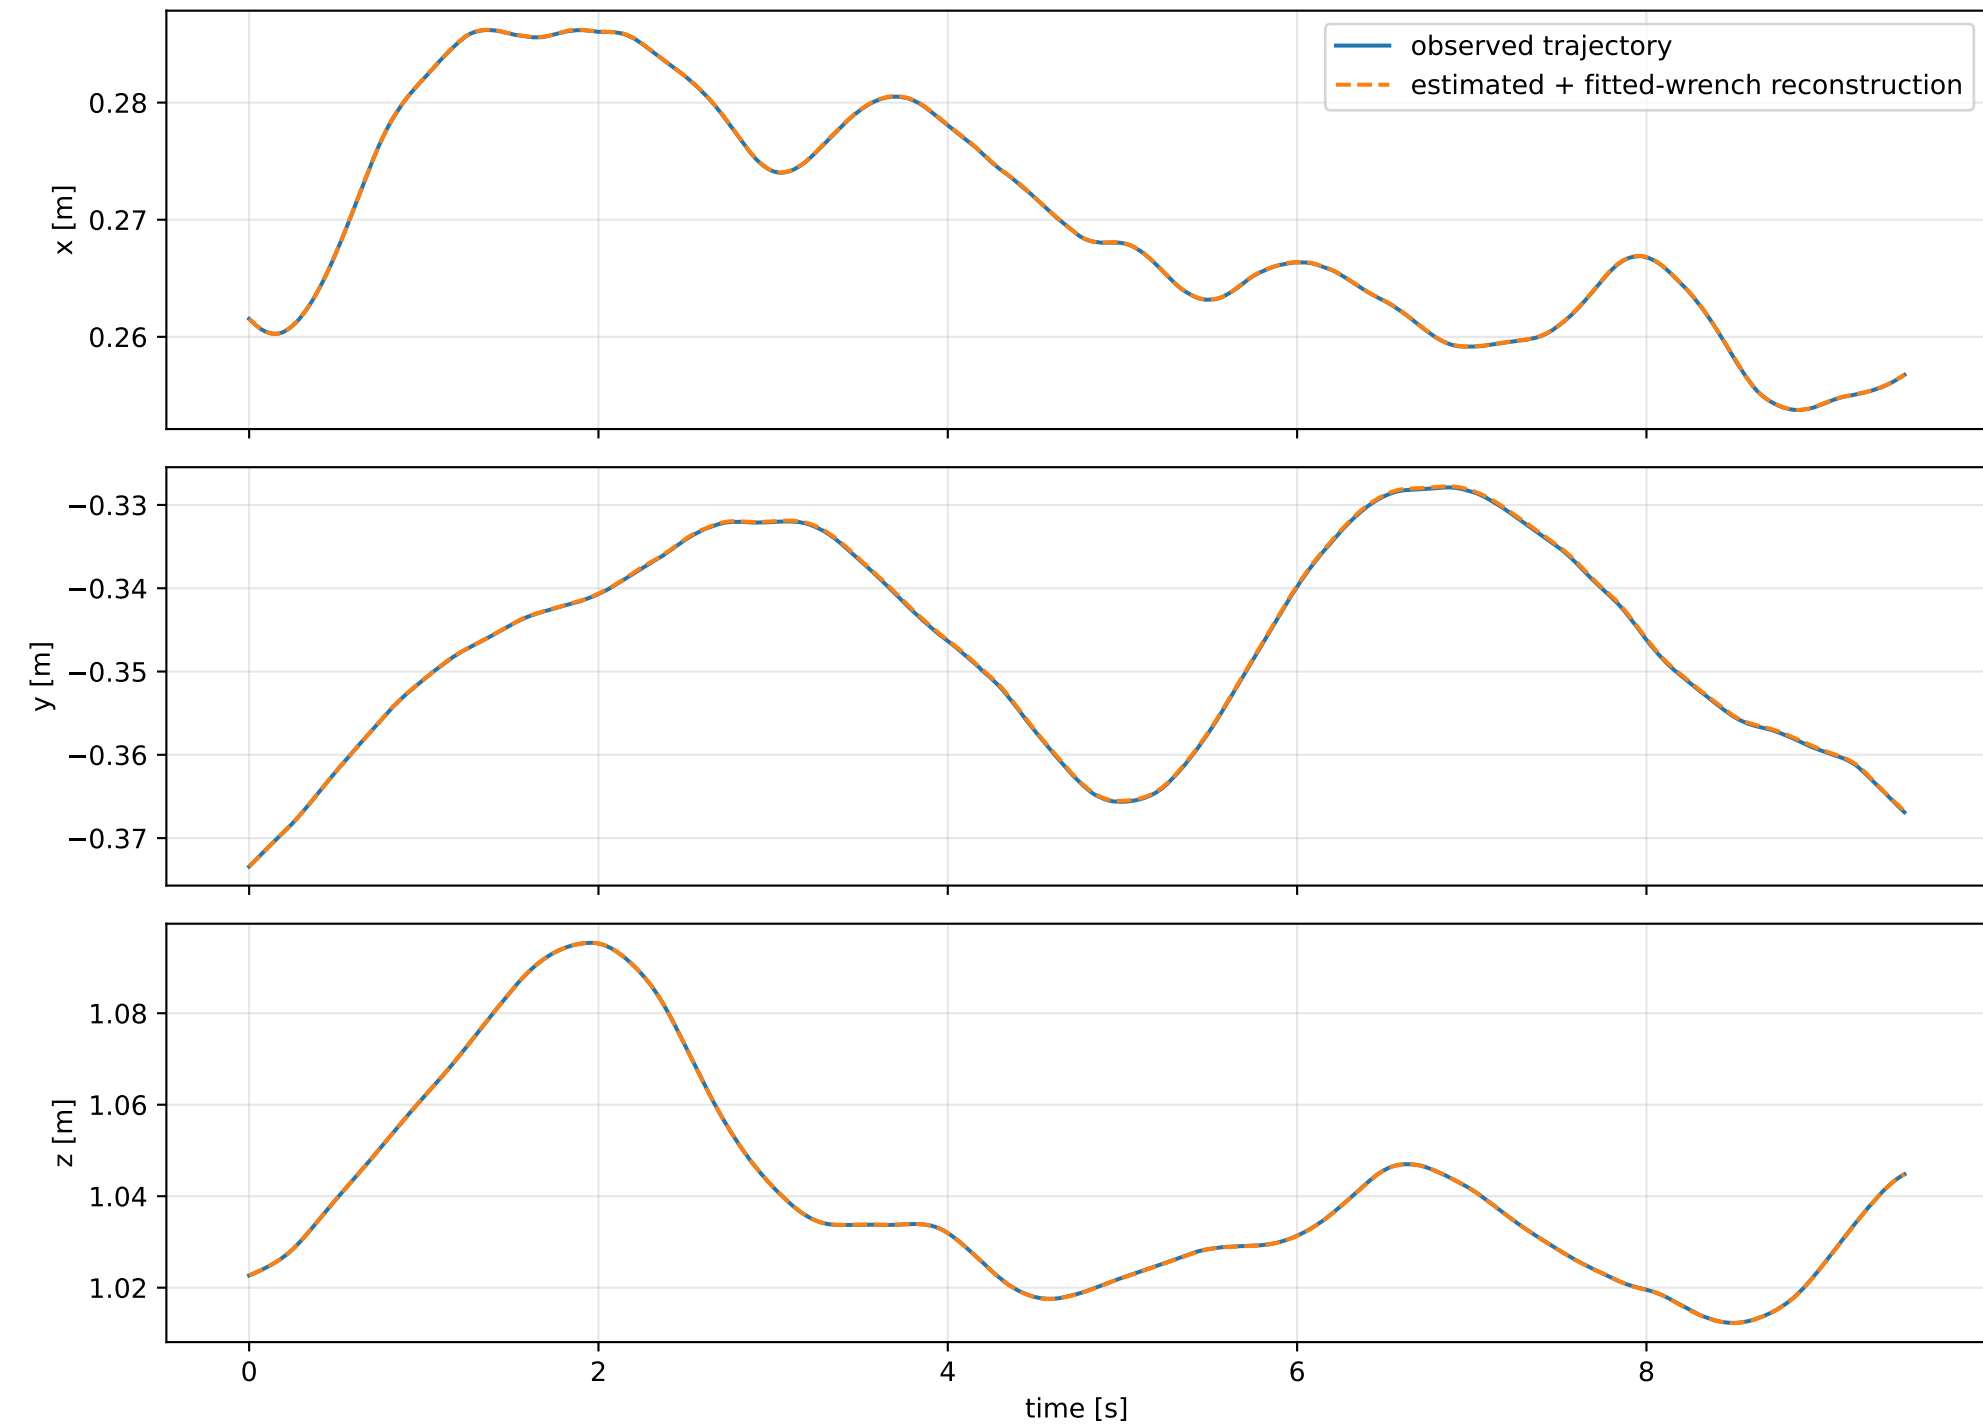
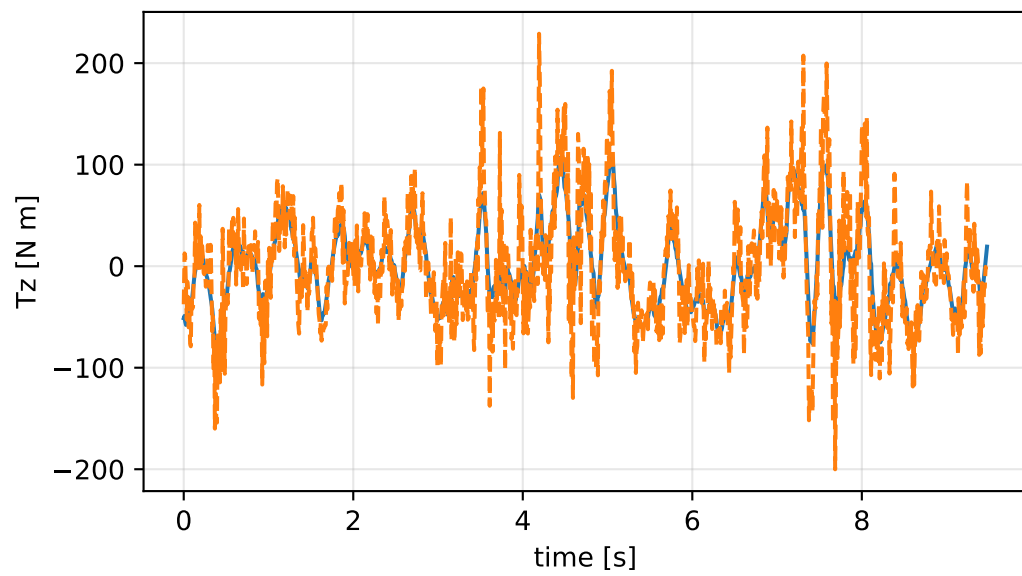
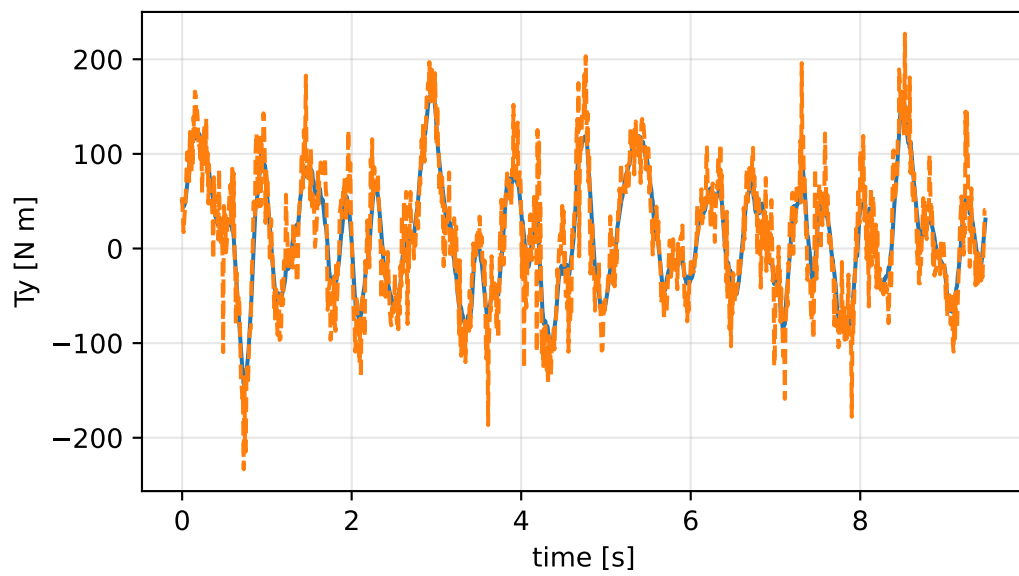
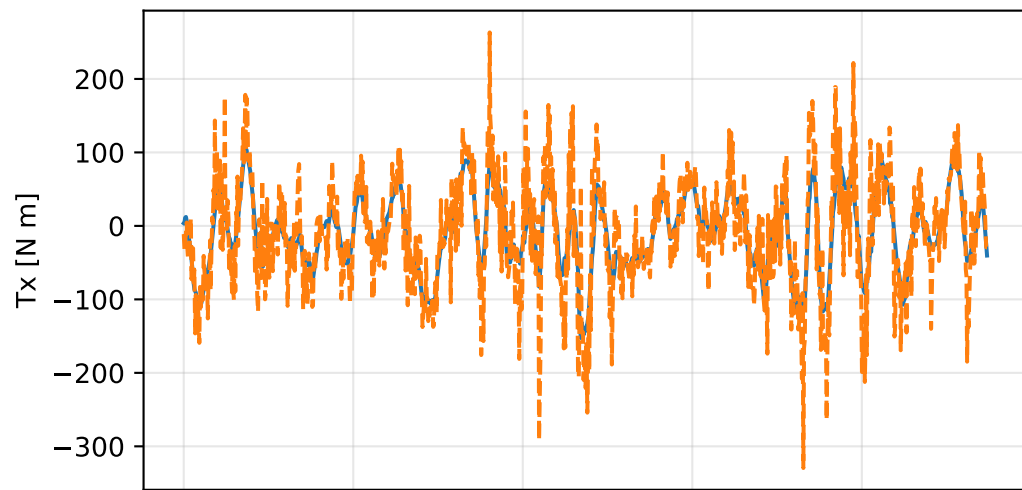
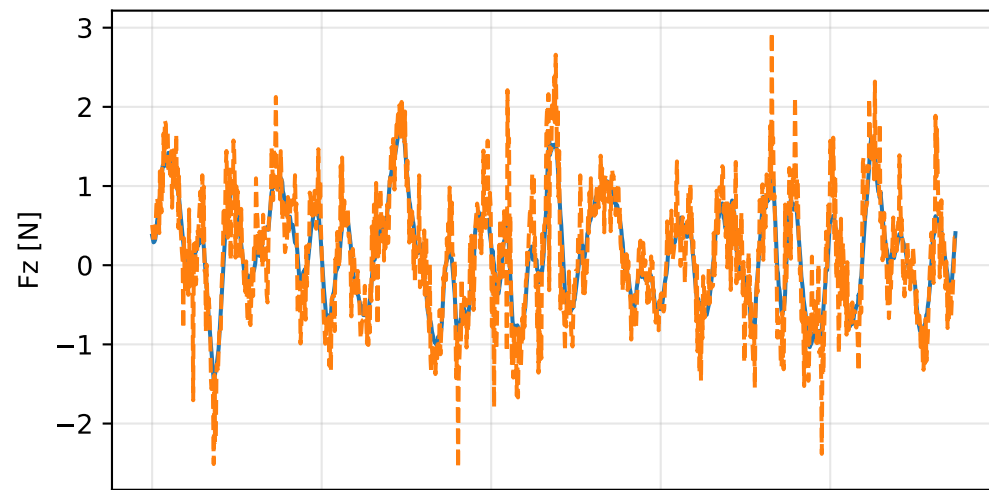



kkt_off_scale_zero: trajectory

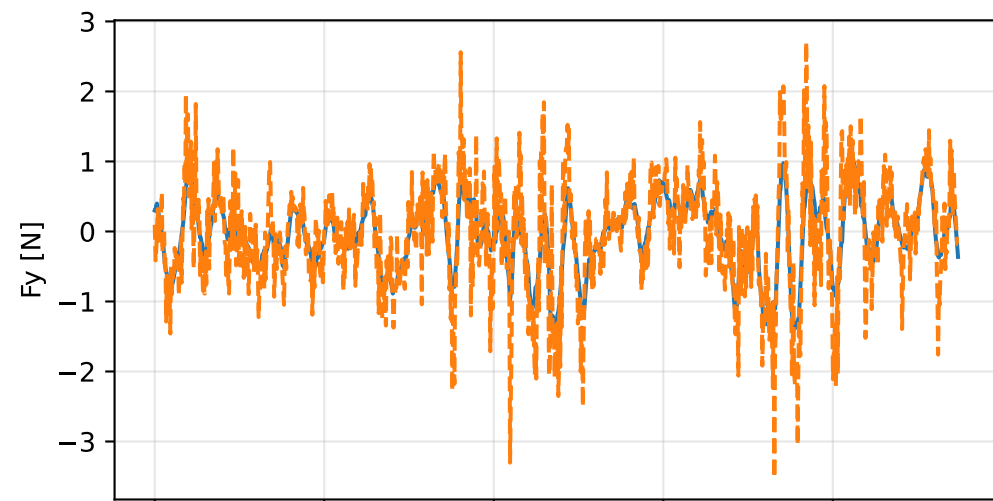

kkt_off_scale_zero:residual wrench

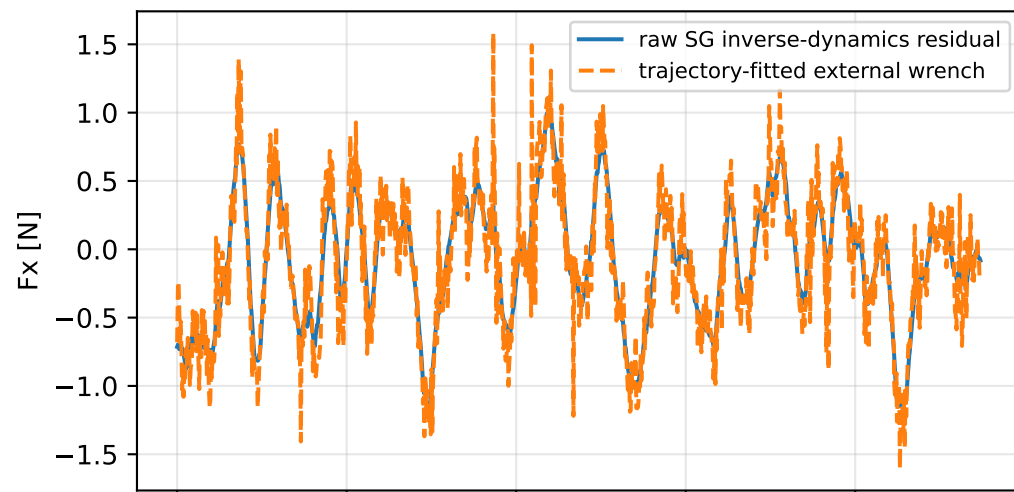

kkt_off_scale_zero: measured sensor comparison

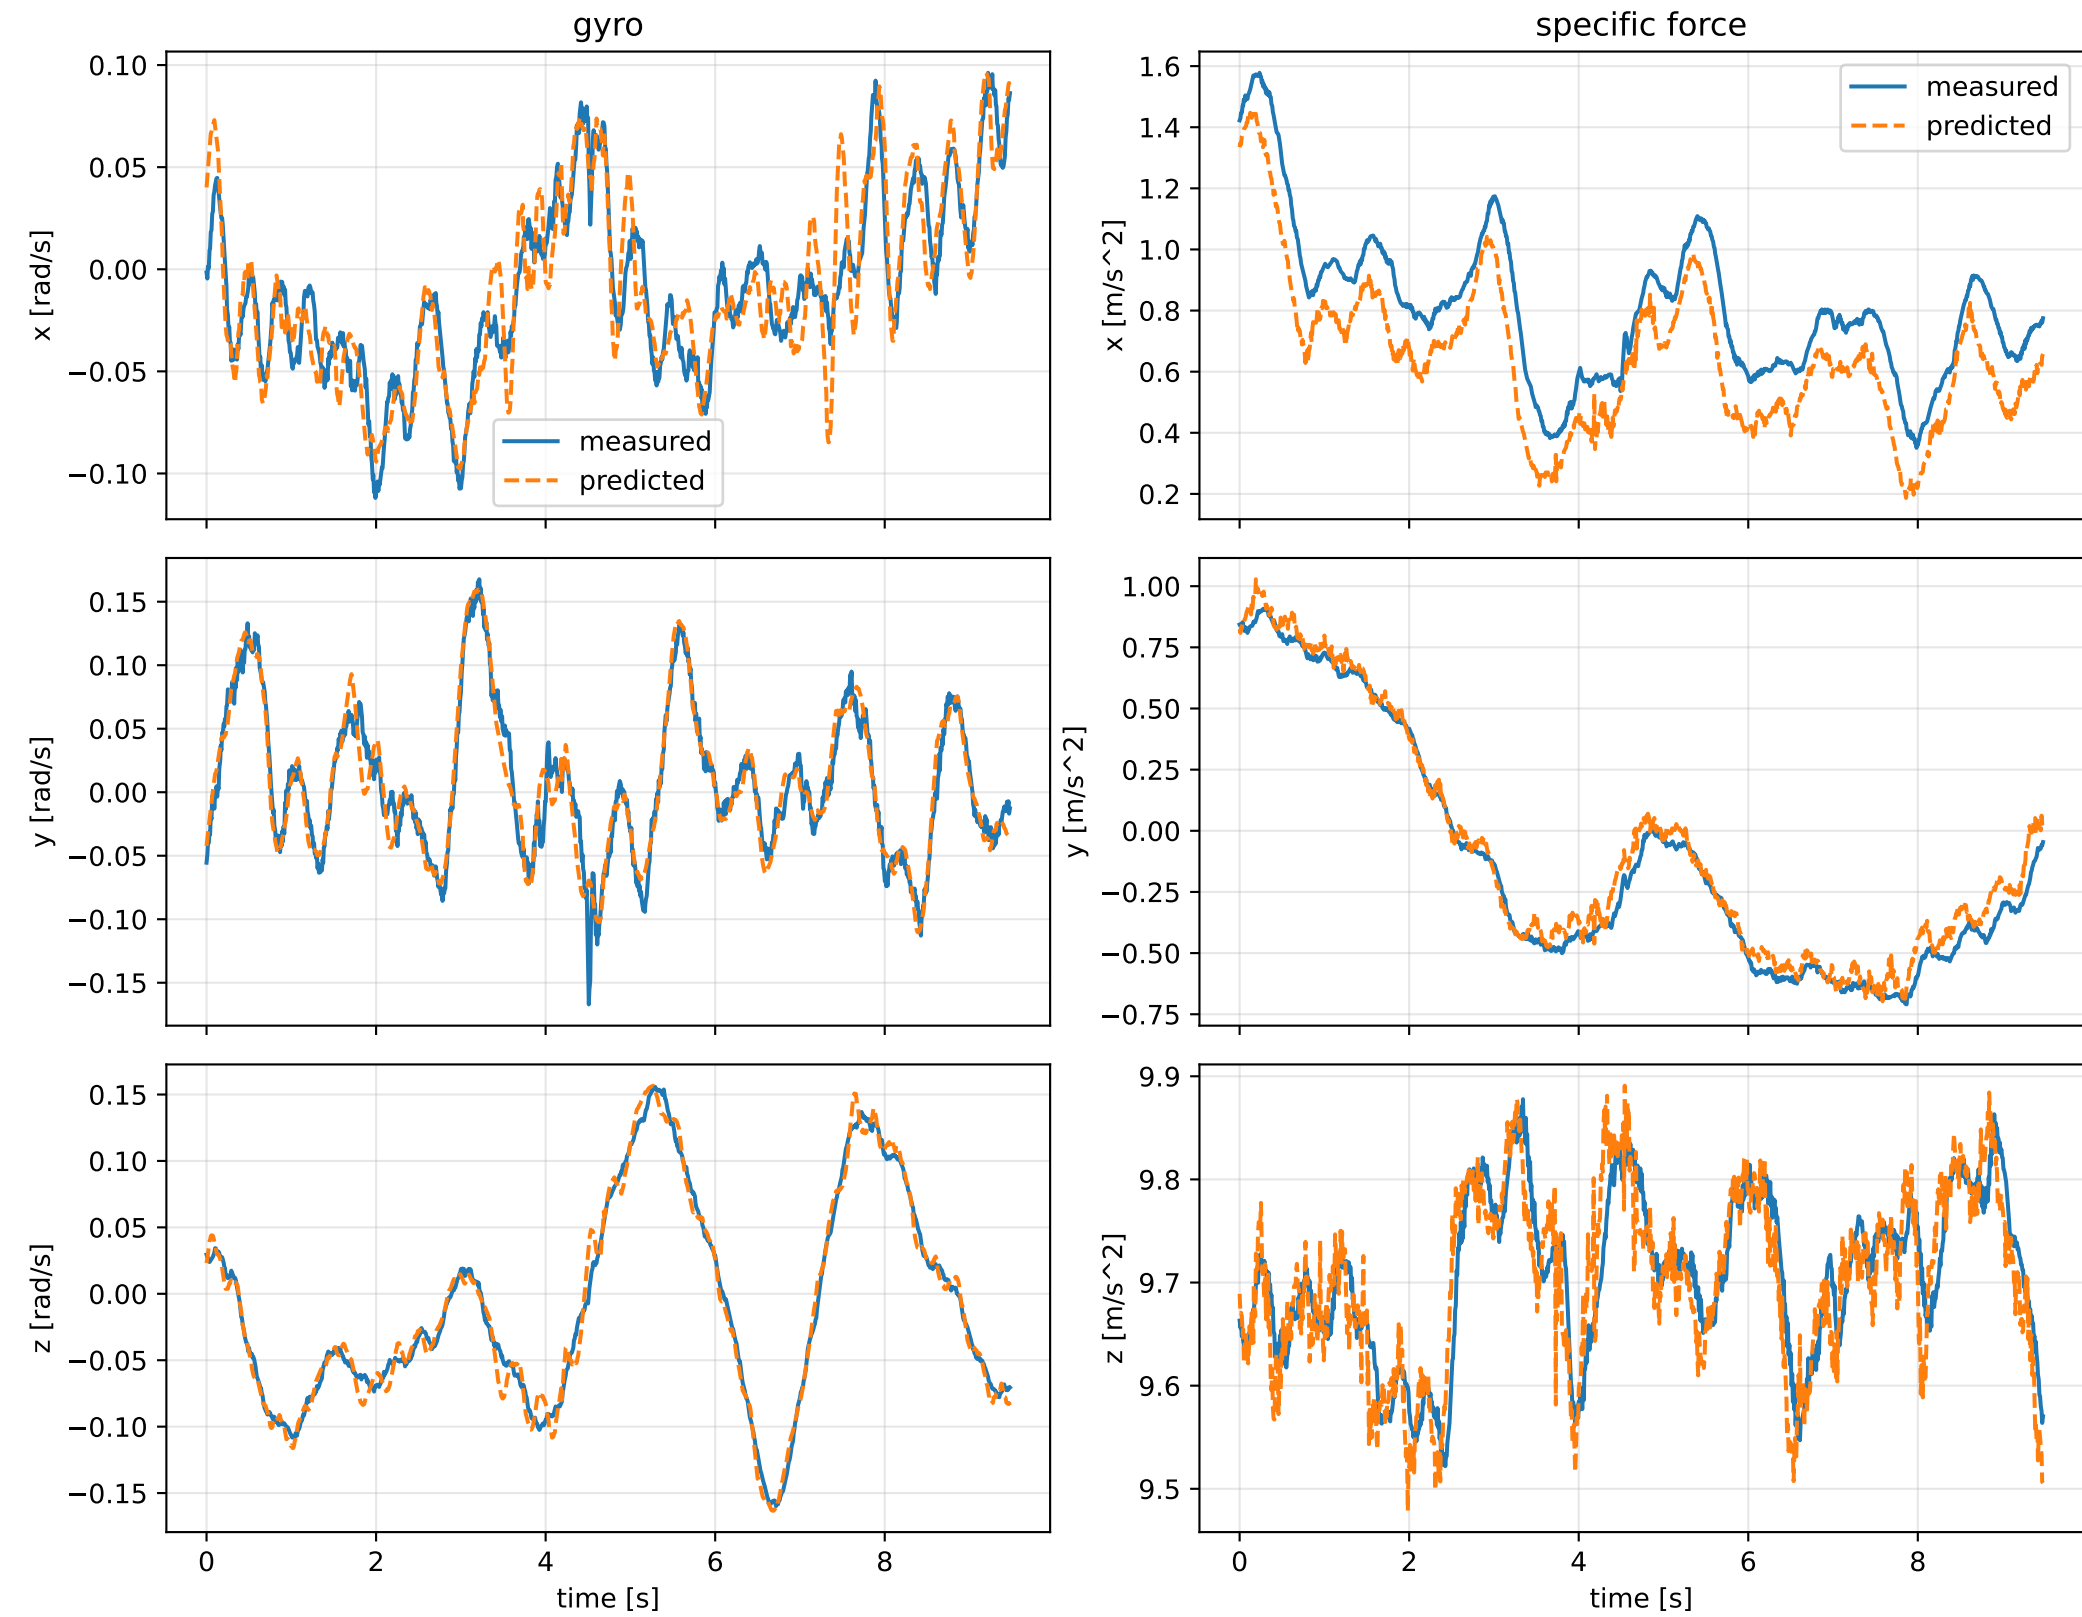

kkt_off_scale_zero: nominal -> estimated parameters

Case: kkt_off_scale_zero

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 1.07795273 delta -1.27364486

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [117.1072841 -69.5380591 -73.7812953] d=[117.042284 -69.5380583 -73.7812953]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [-69.5380591 149.8375079 -58.3750884] d=[-69.5380583 149.7725553 -58.3750884]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-73.7812953 -58.3750884 142.9393625] d=[-73.7813143 -58.3750885 142.8103625]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-1.3324326 -0.9585076 -1.1045125] d=[-1.3304079 -0.9584771 9.5097496e-03]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.2327591 0.2460669 0.4124717 0.5627114] d=[-0.7672409 -0.7539331 -0.5875283 -0.4372886]

rotor lag [s] 0.199999857

gimbal lag [s] 0.0503390711