

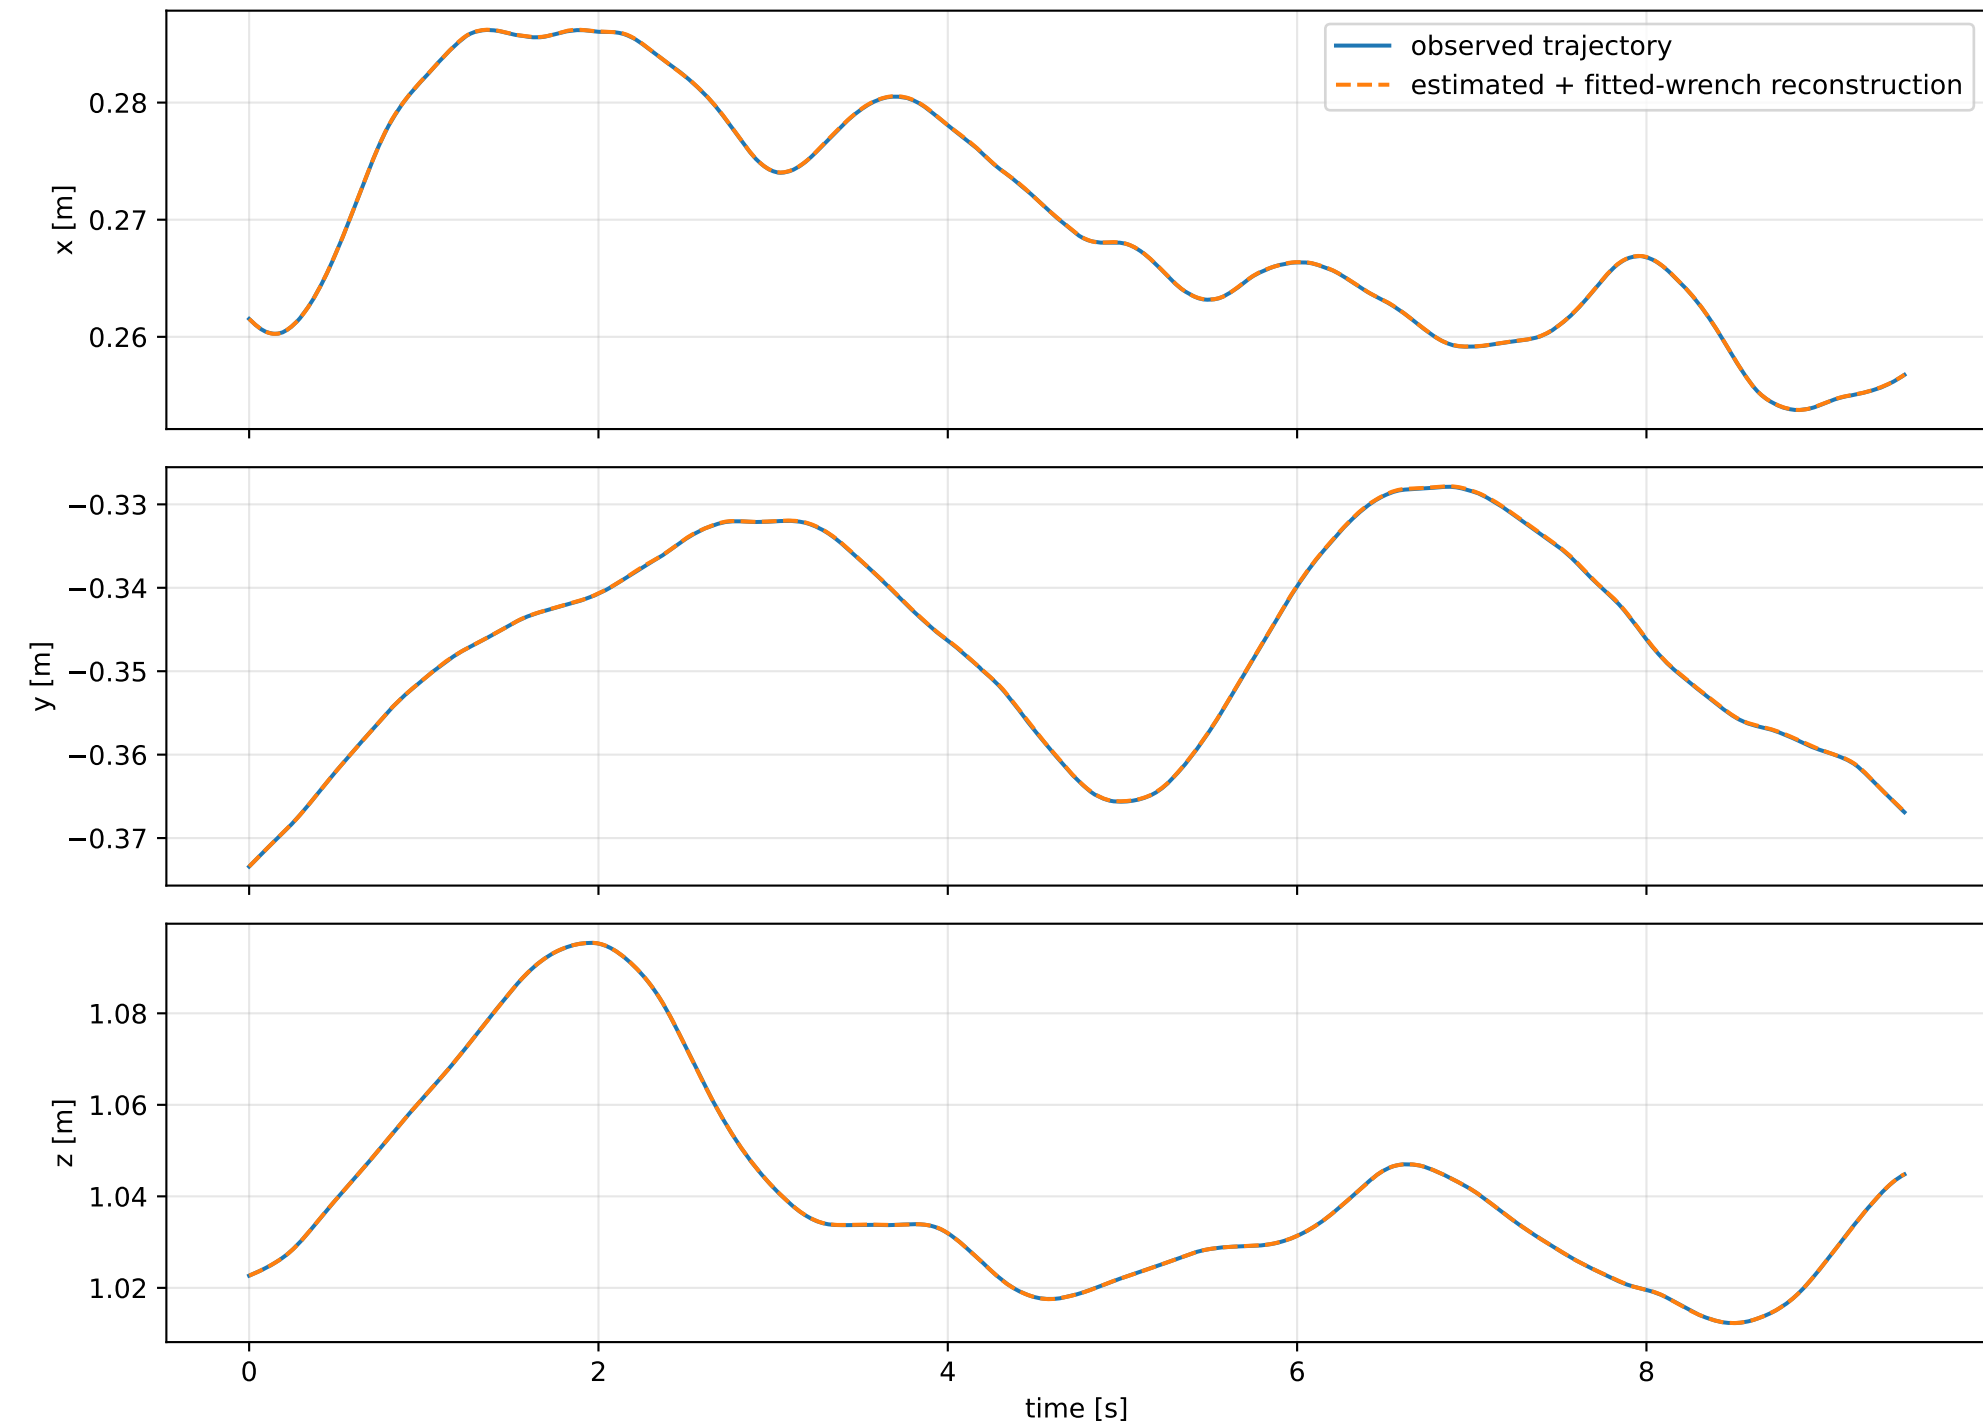
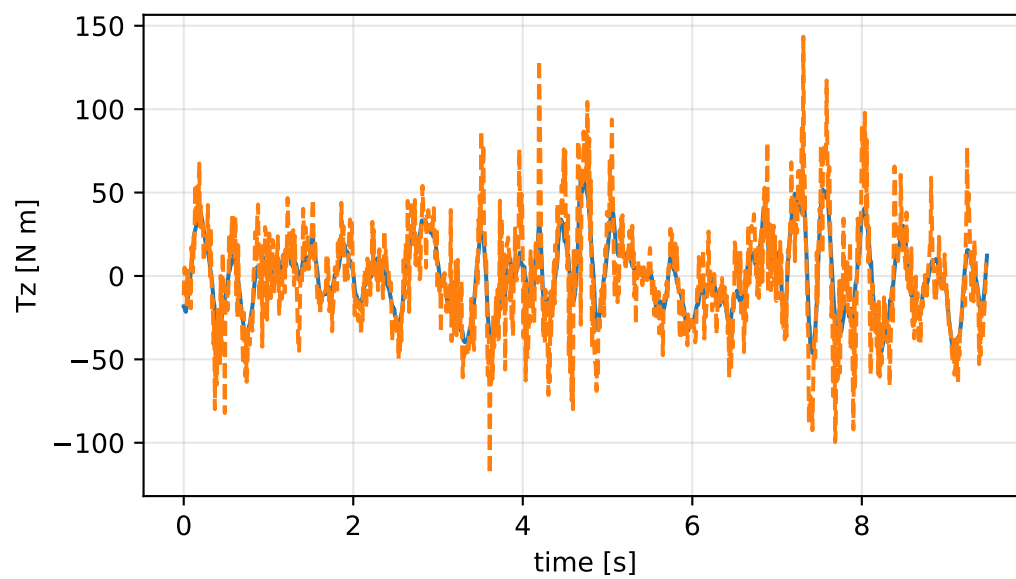
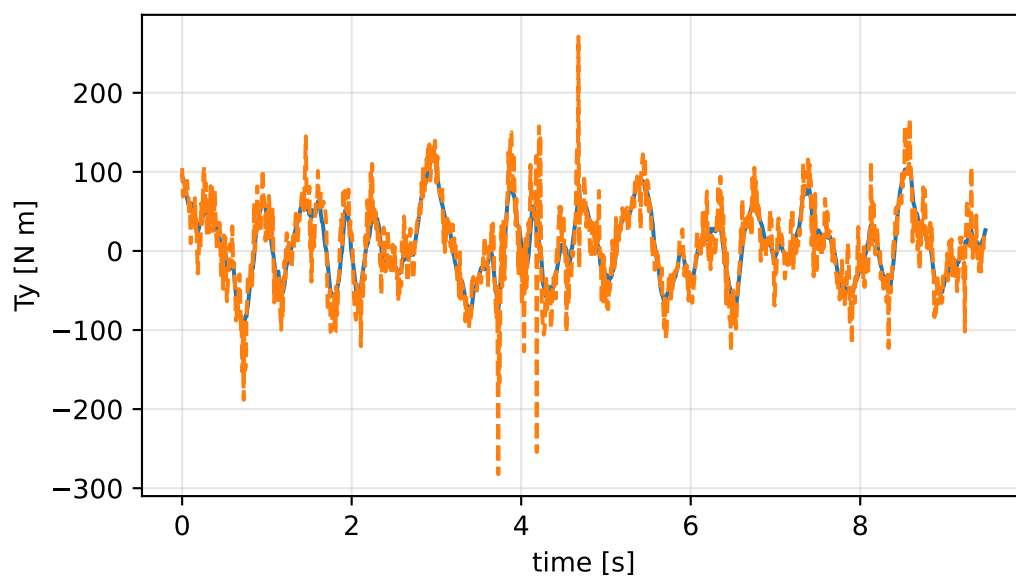
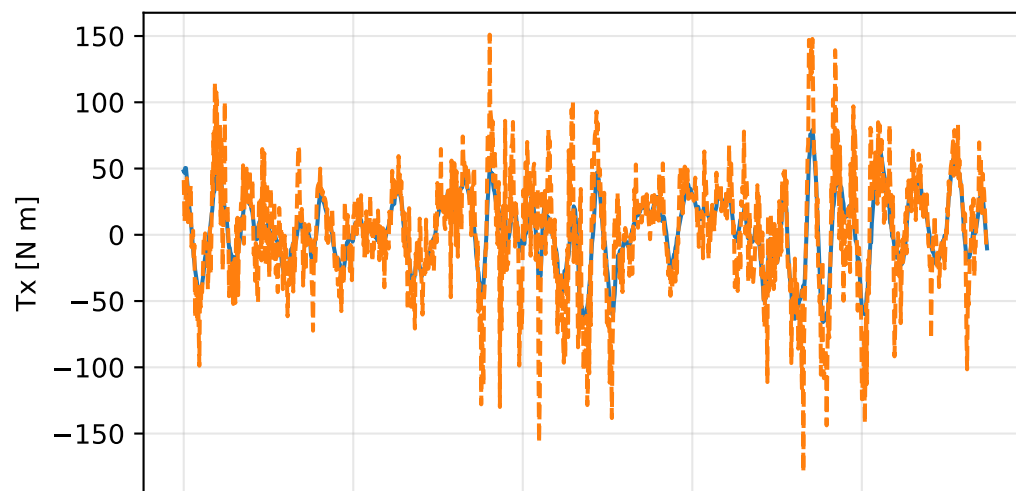
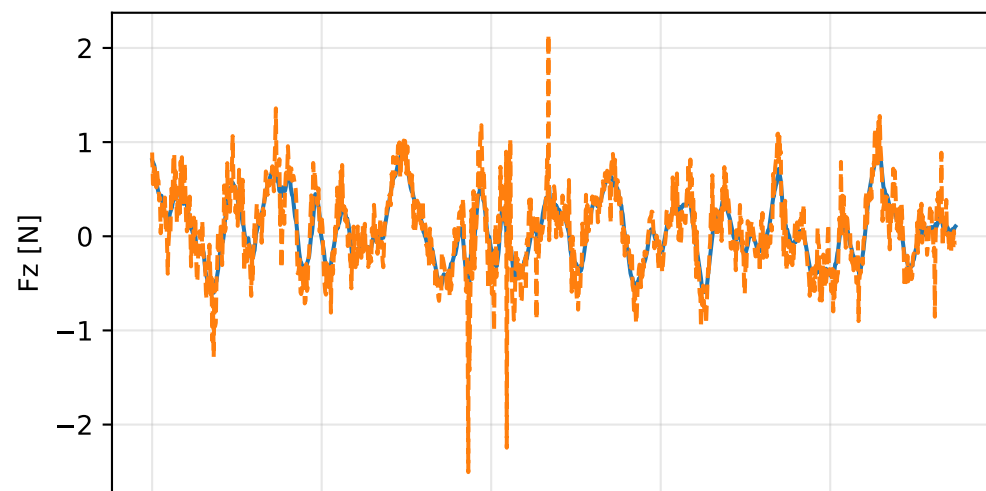


lag_fixed: trajectory

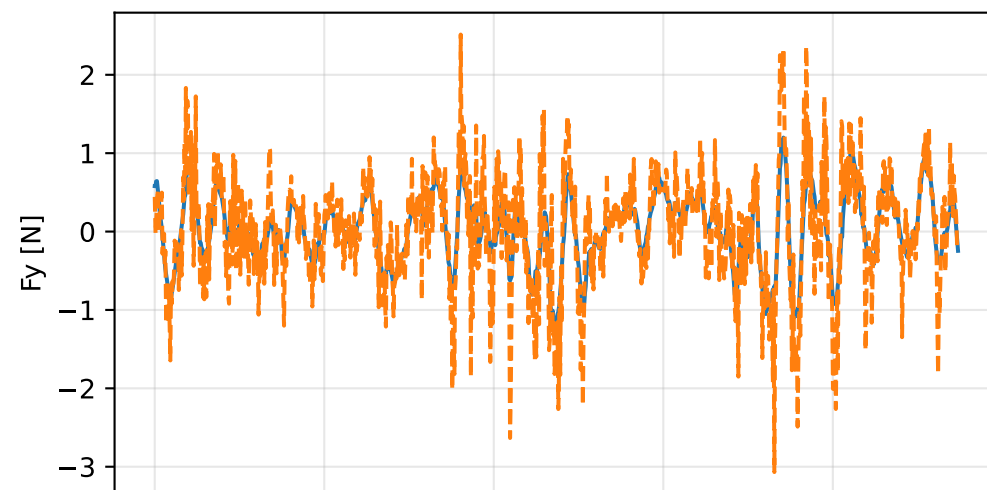


lag_fixed: residual wrench





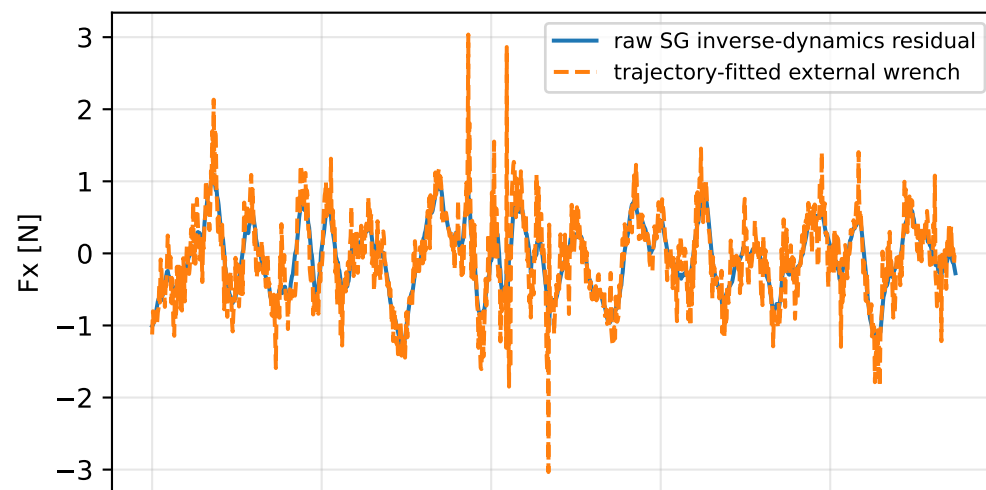


lag_fixed: measured sensor comparison

gyro

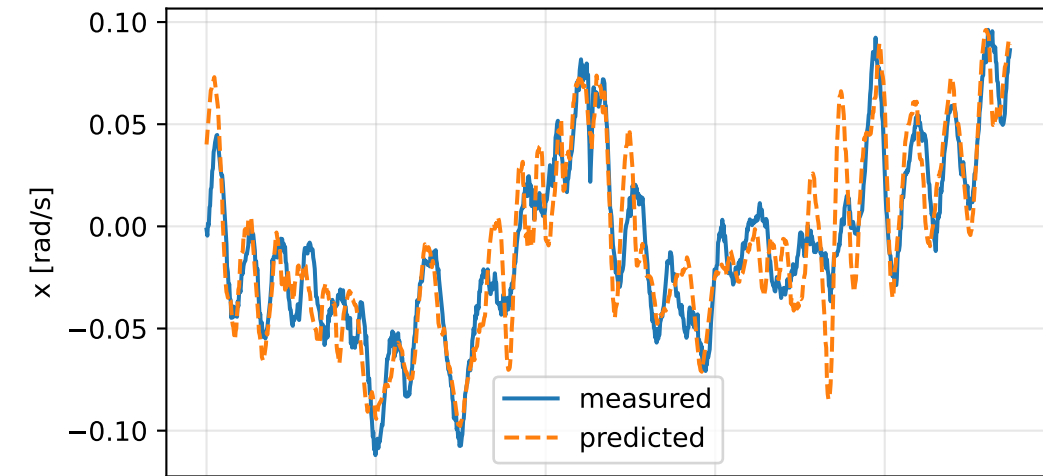

specific force

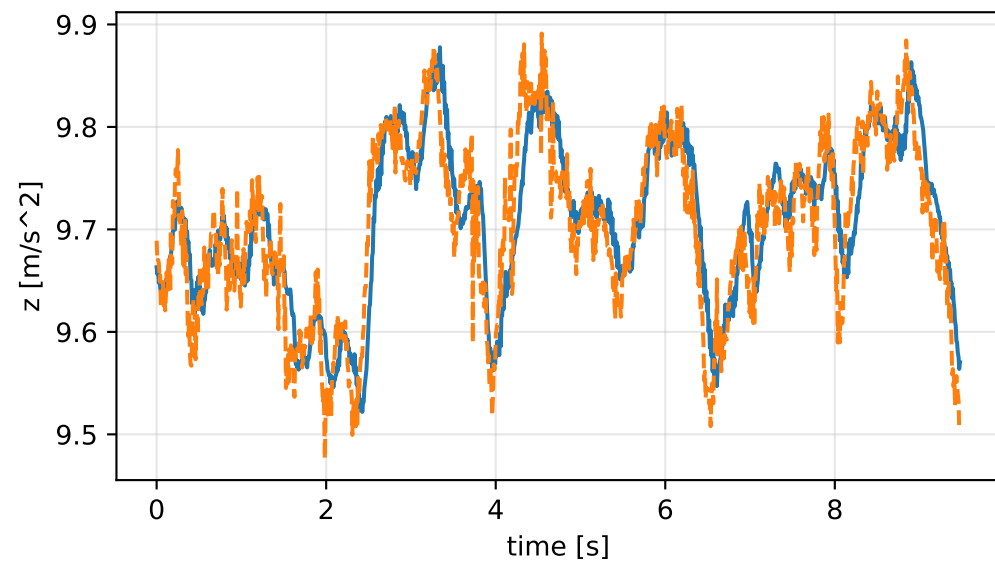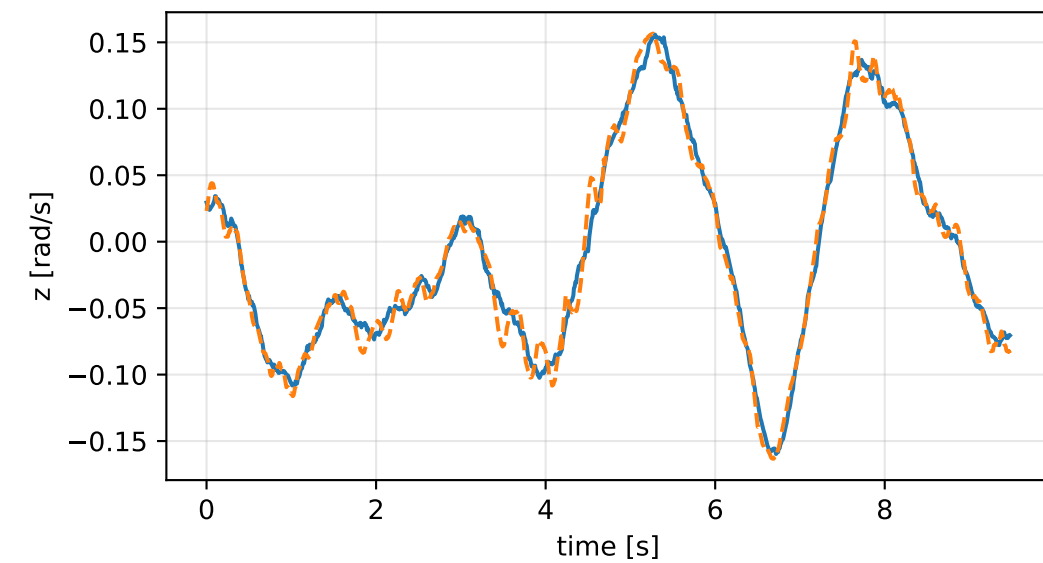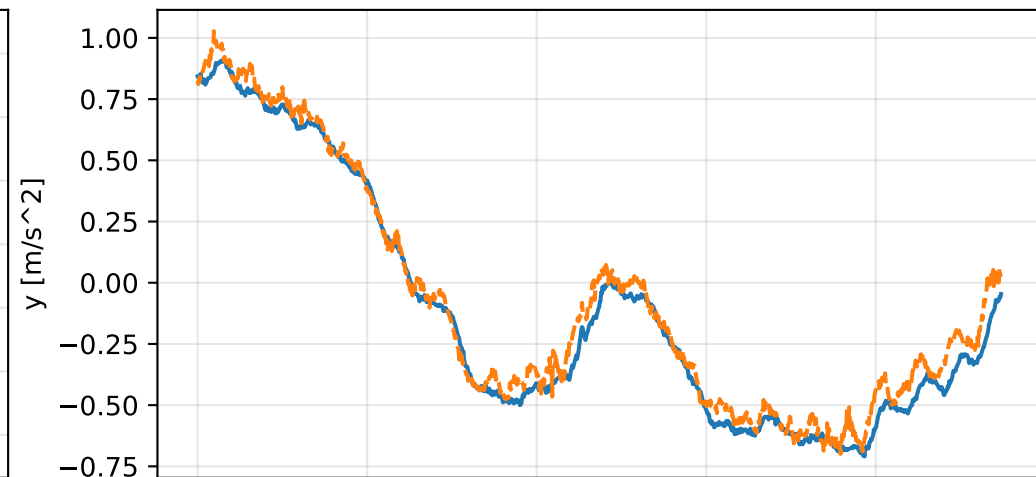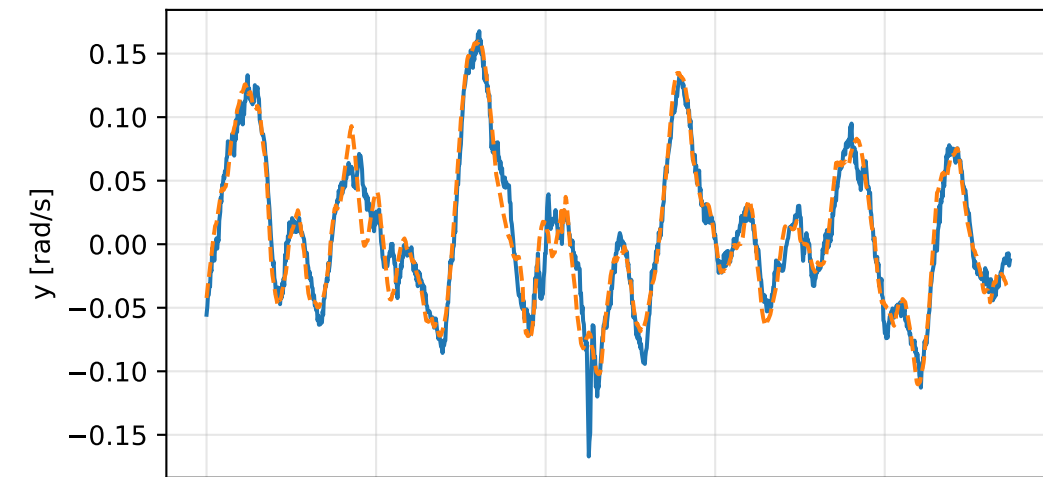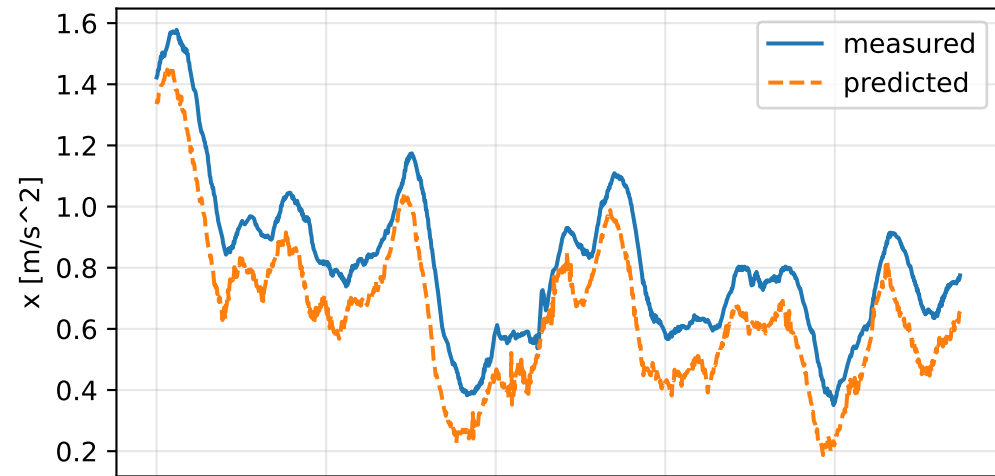

lag_fixed: nominal -> estimated parameters

Case: lag_fixed

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 1.06739832 delta -1.28419927

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [77.2226903 9.7600362 -54.8857915] d=[77.1576903 9.760037 -54.8857915]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [9.7600362 115.1719892 13.2379508] d=[9.760037 115.1070366 13.2379508]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-54.8857915 13.2379508 42.7030962] d=[-54.8858105 13.2379508 42.574105]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-0.8135084 0.22106 -1.1355292] d=[-0.8114837 0.2210905]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.2558135 0.3970887 0.4479657 0.3756991] d=[-0.7441865 -0.6029113 -0.5520343 -0.6243009]

rotor lag [s] 0.0100001097

gimbal lag [s] 0.0100001097