

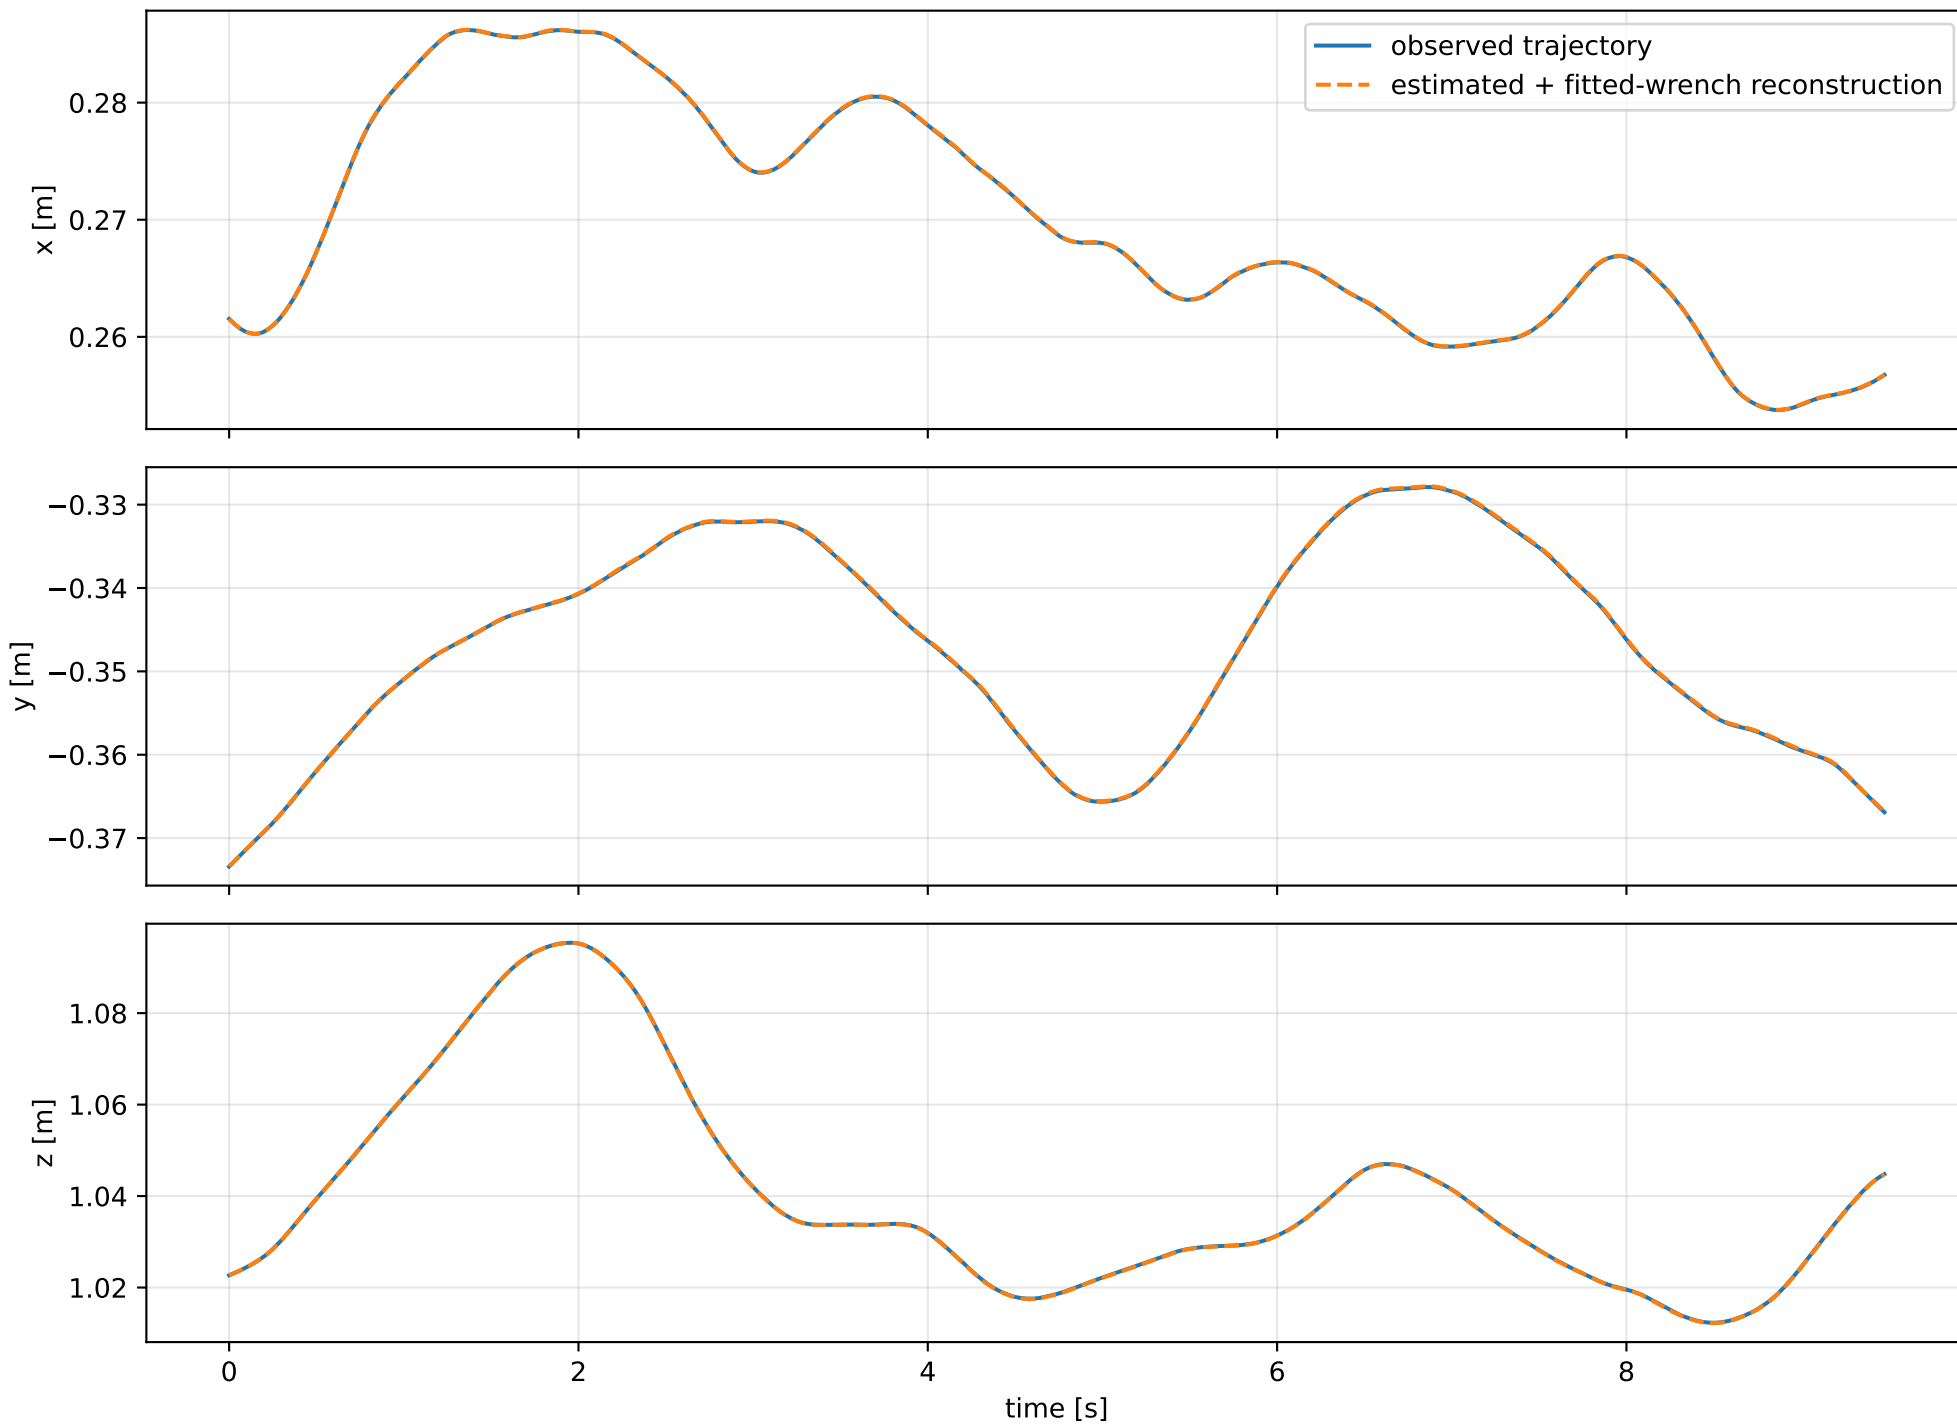
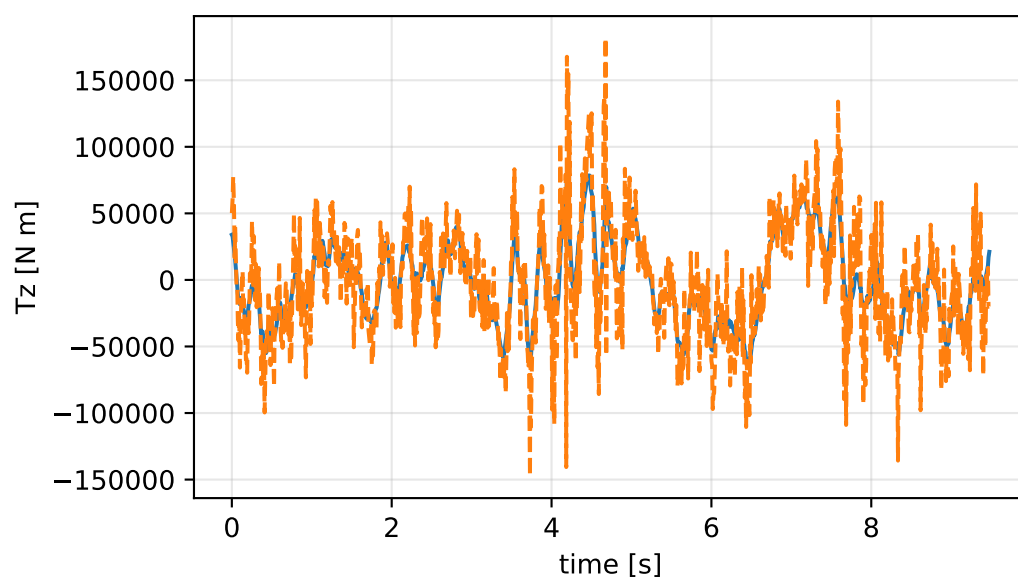
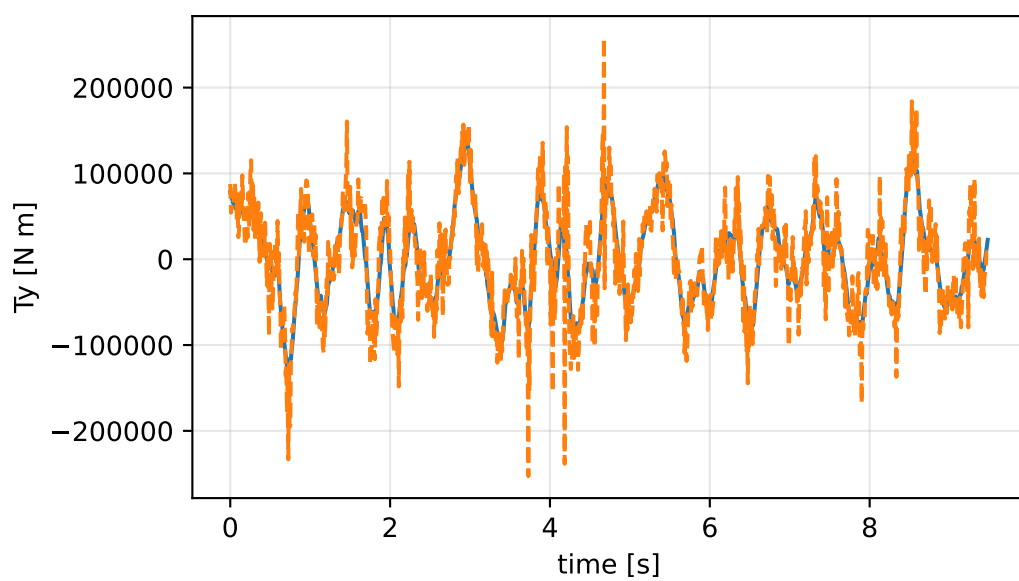
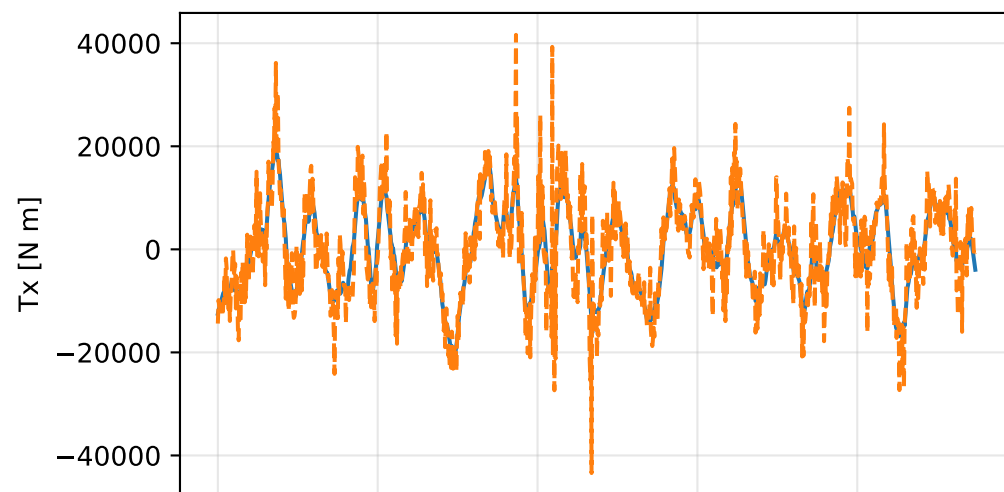
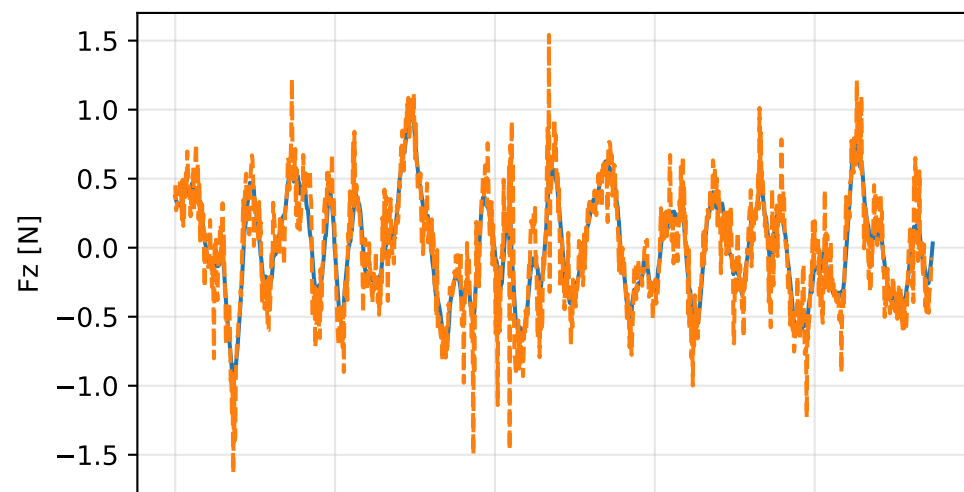


lag_split_strict_only: trajectory

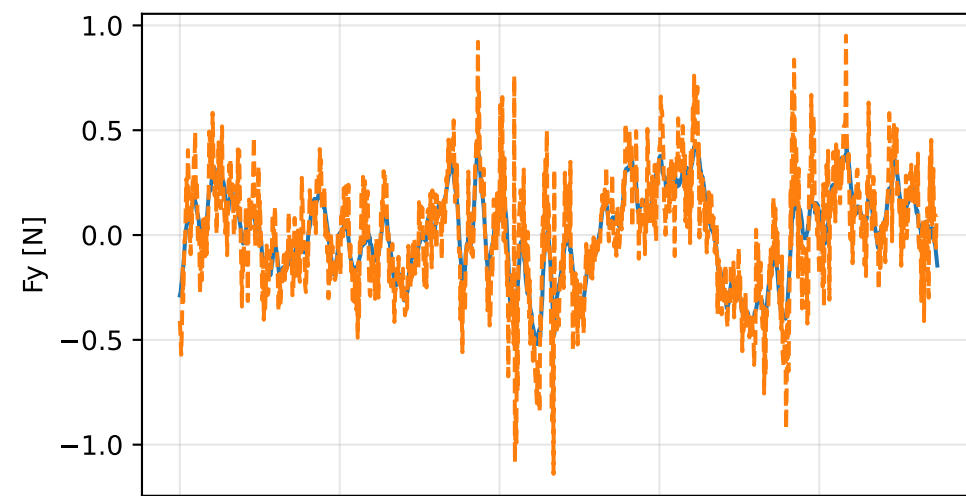


lag_split_strict_only: residual wrench





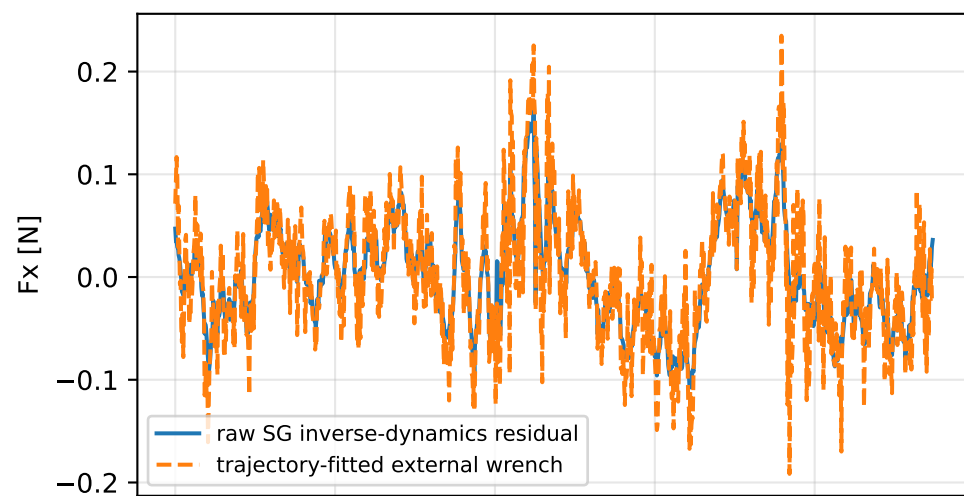


lag_split_strict_only: measured sensor comparison

gyro

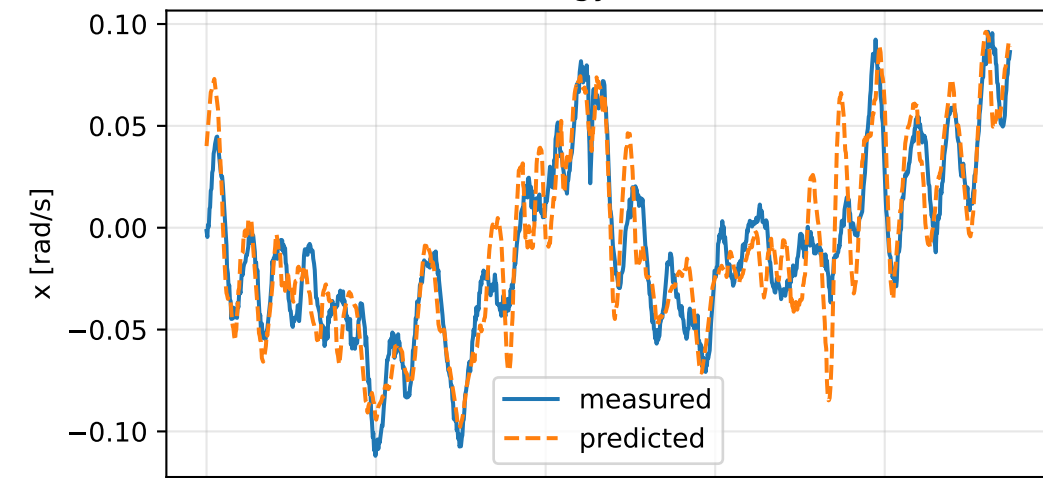

specific force

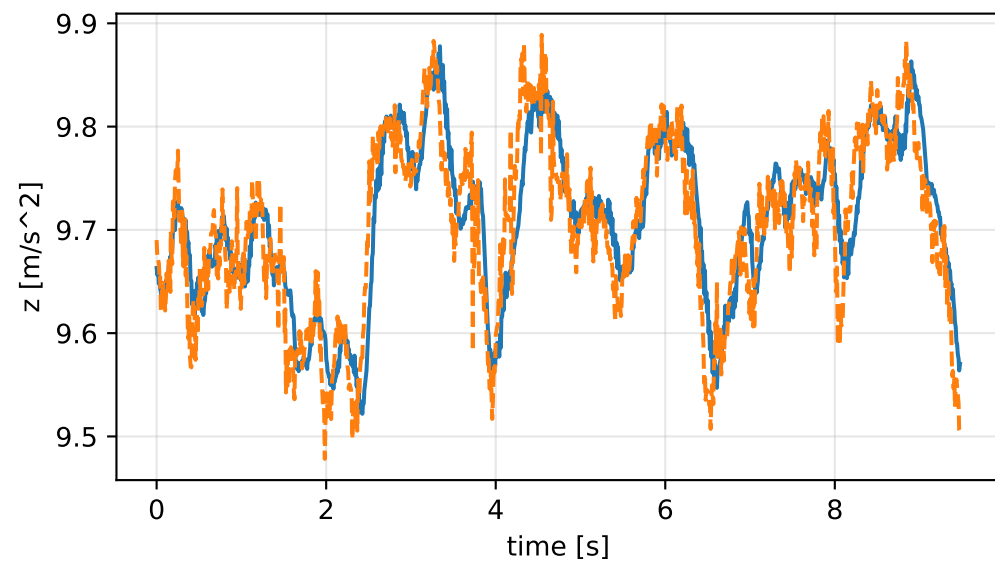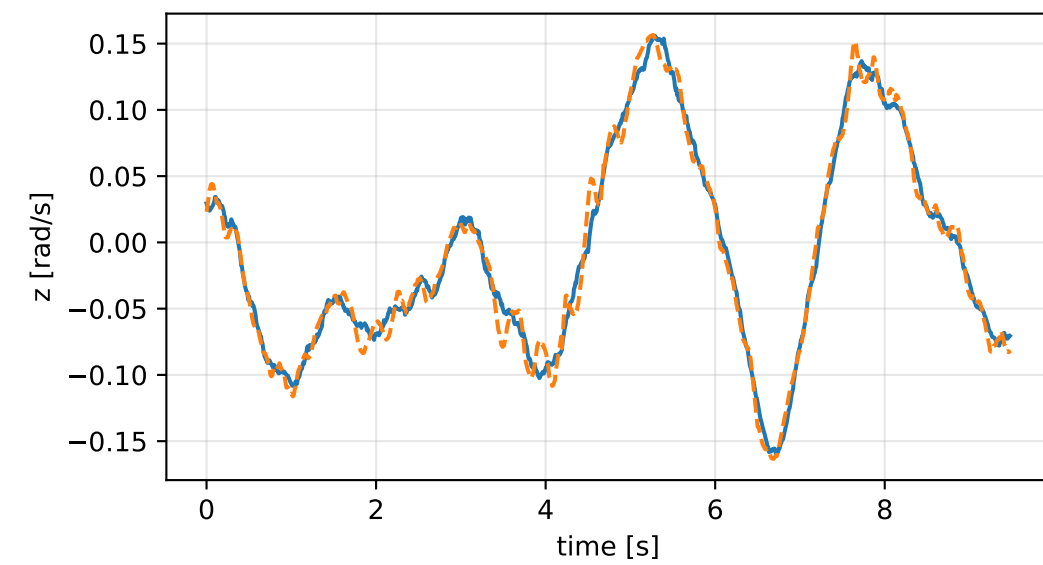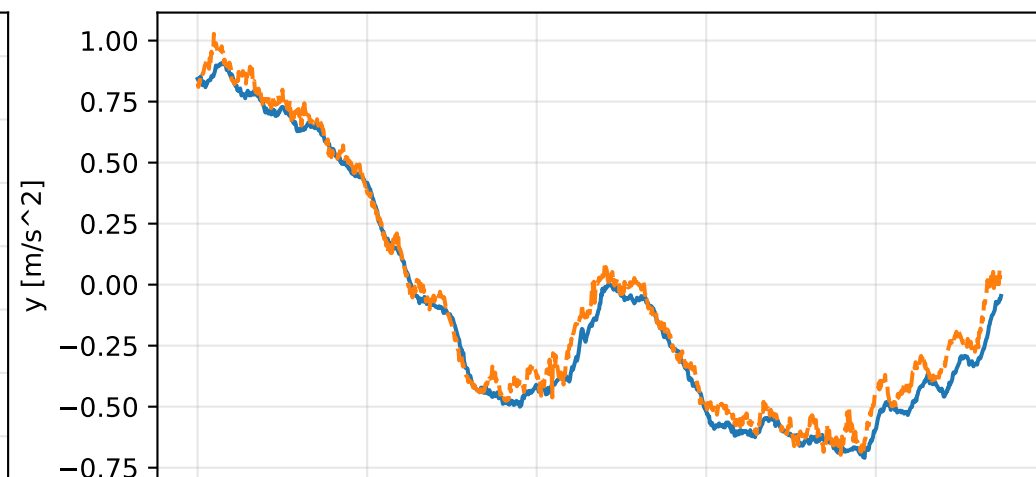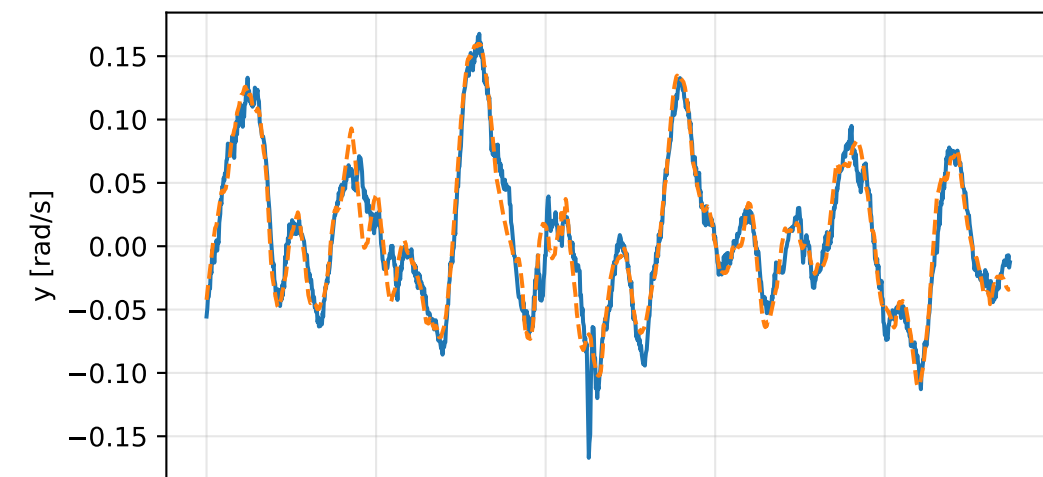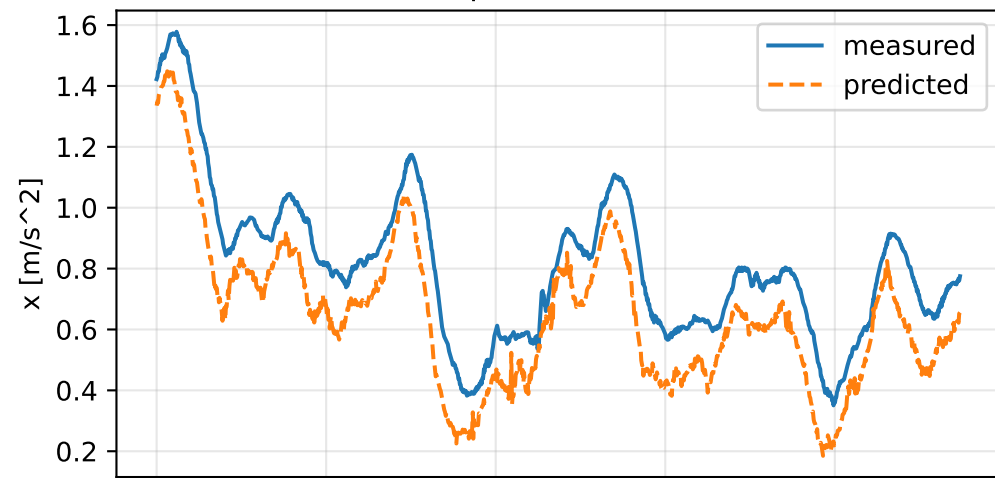

lag_split_strict_only: nominal -> estimated parameters

Case: lag_split_strict_only

status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 0.7678713 delta -1.58372629

inertia [kg m²] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [3041.0511299 -19858.5388814 -4179.346969] d=[3040.9861299 -19858.5388814 -4179.346969]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [-19858.5388814 135552.6808207 -612.8653714] d=[-19858.5388806 135552.6808207 -612.8653714]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-4179.346969 -612.8653714 138335.7661313] d=[-4179.3469881 -612.8653714 138335.7661313]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-1.1724628 -0.3210172 -0.0097059] d=[-1.1704381 -0.3209867 -0.0097059]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.3771408 0.5219344 0.1267076 0.0613536] d=[-0.6228592 -0.4780656 -0.8732924 -0.9386464]

rotor lag [s] 0.2

gimbal lag [s] 0.0500005484