

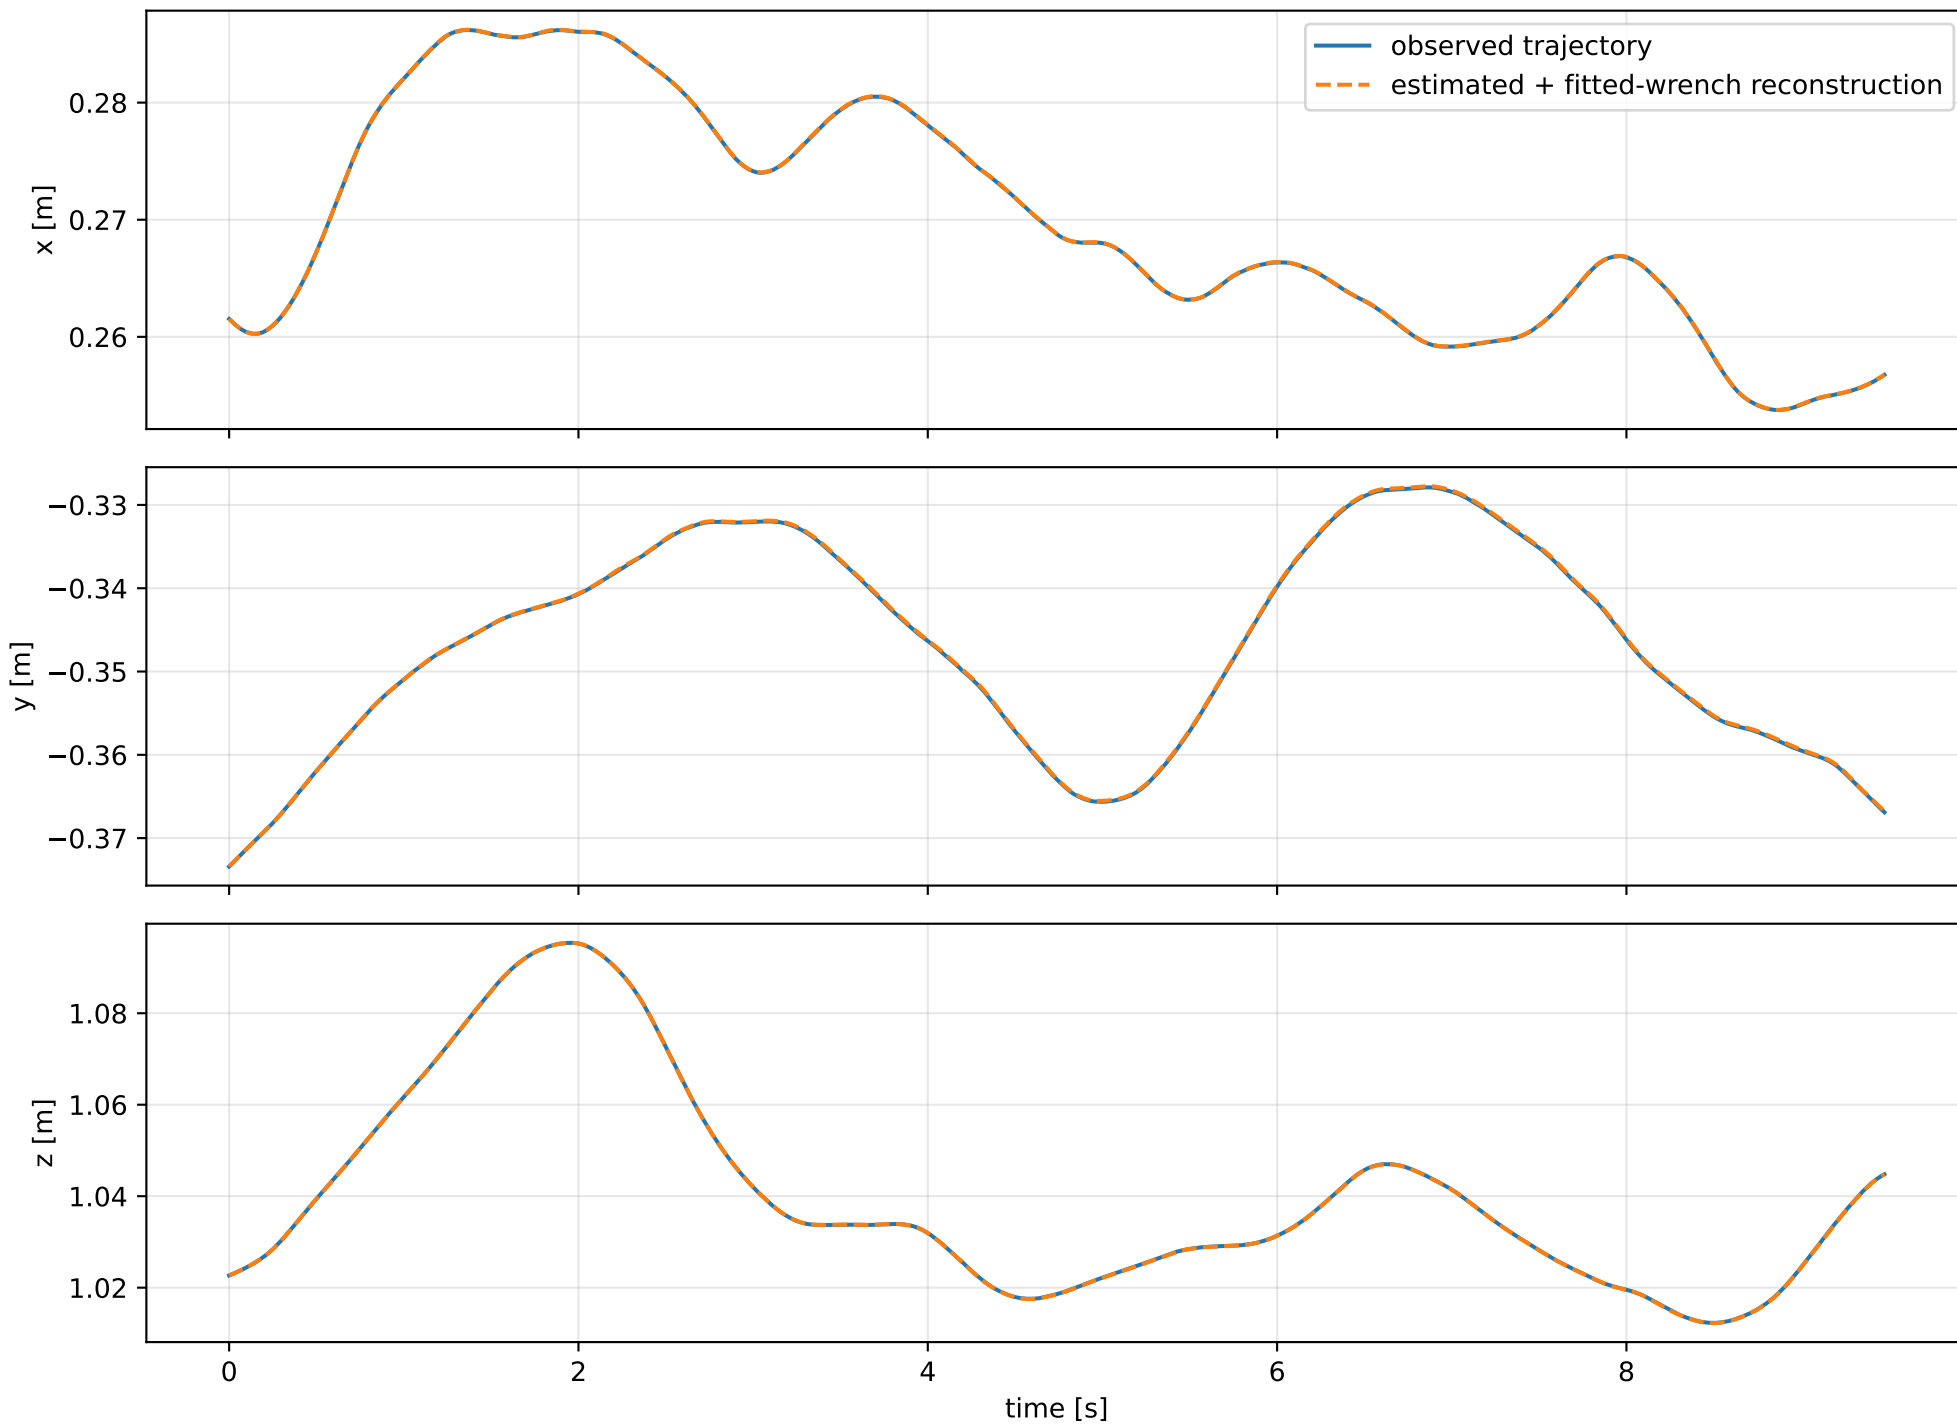
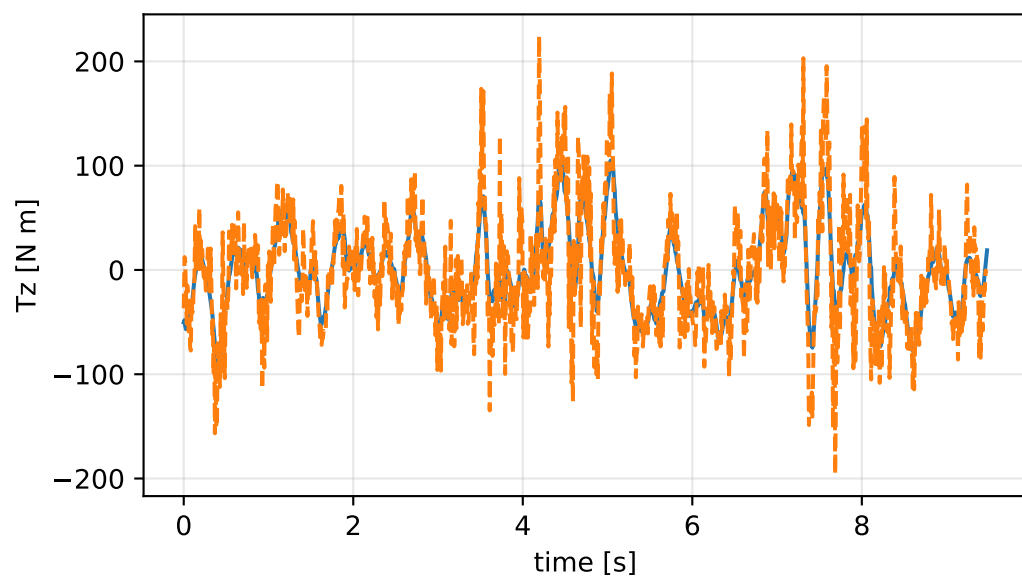
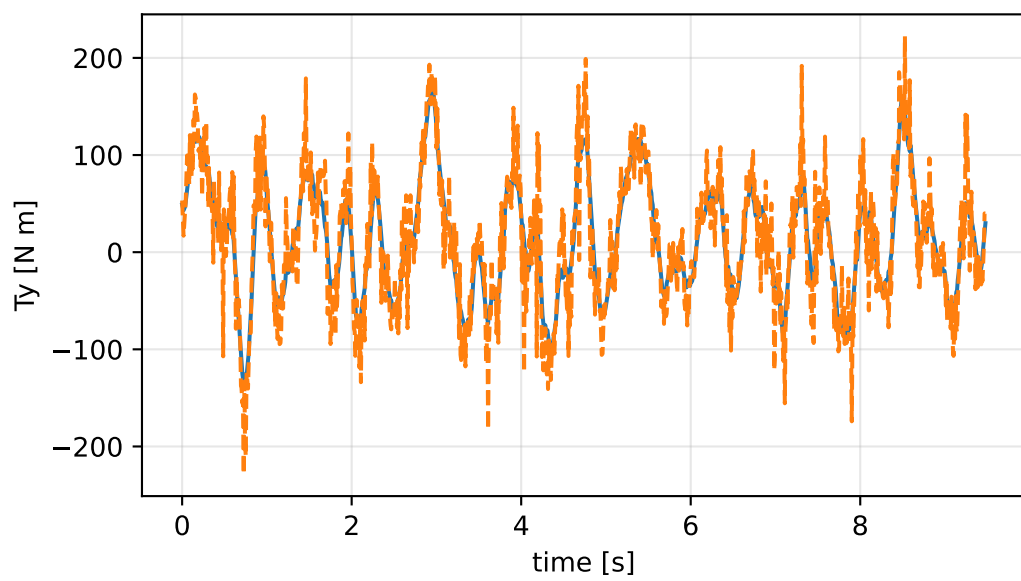
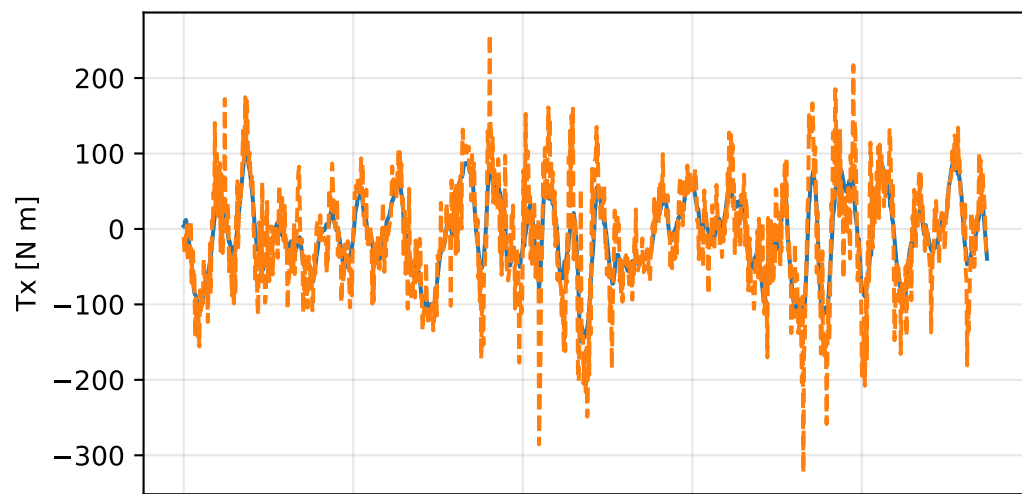
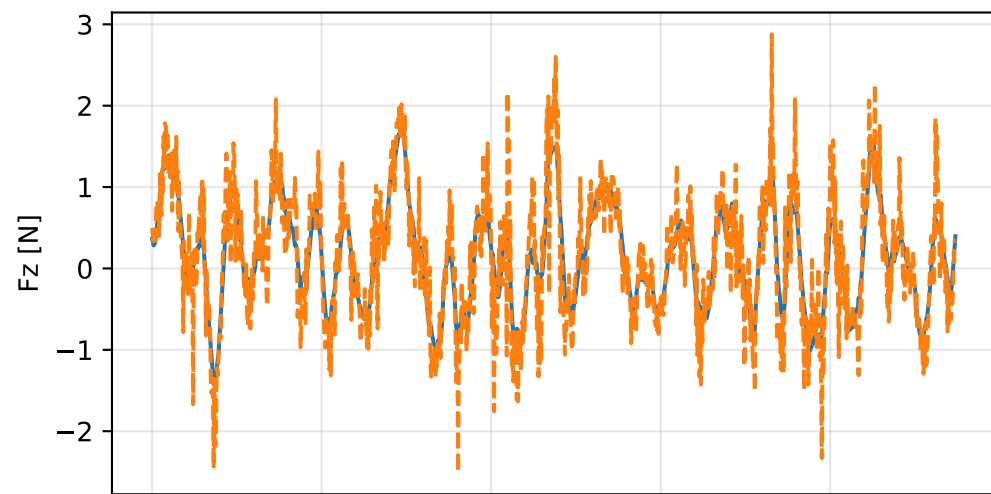


so3_naive_rotation_vector_derivatives: trajectory

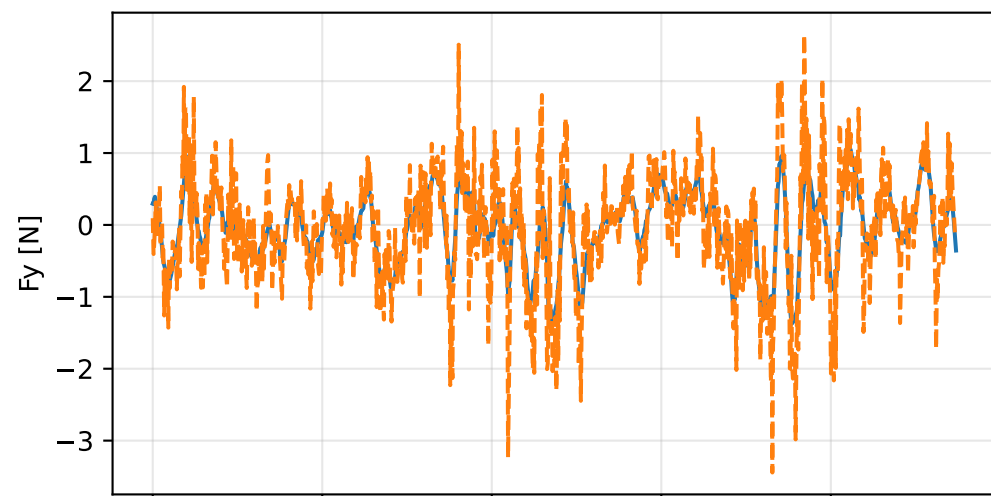


so3_naive_rotation_vector_derivatives: residual wrench





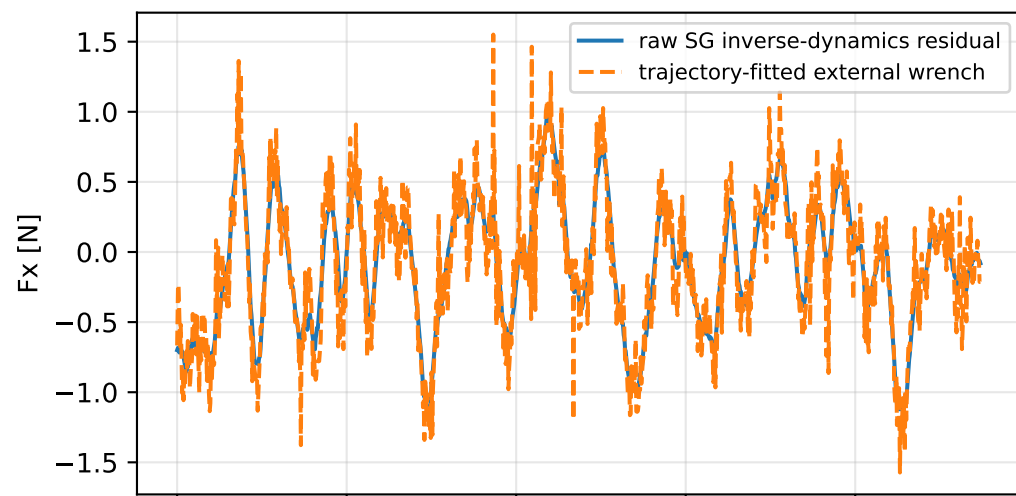


so3_naive_rotation_vector_derivatives: measured sensor comparison

gyro

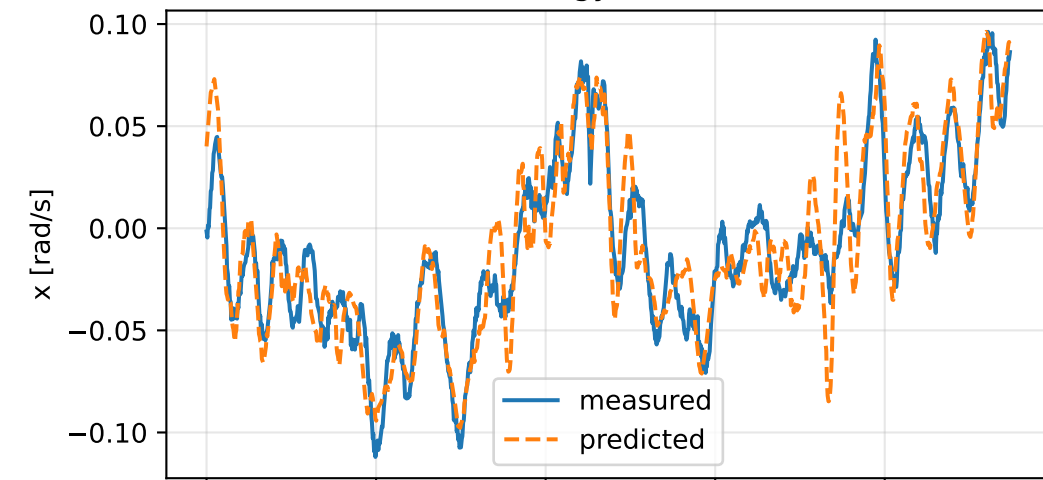

specific force

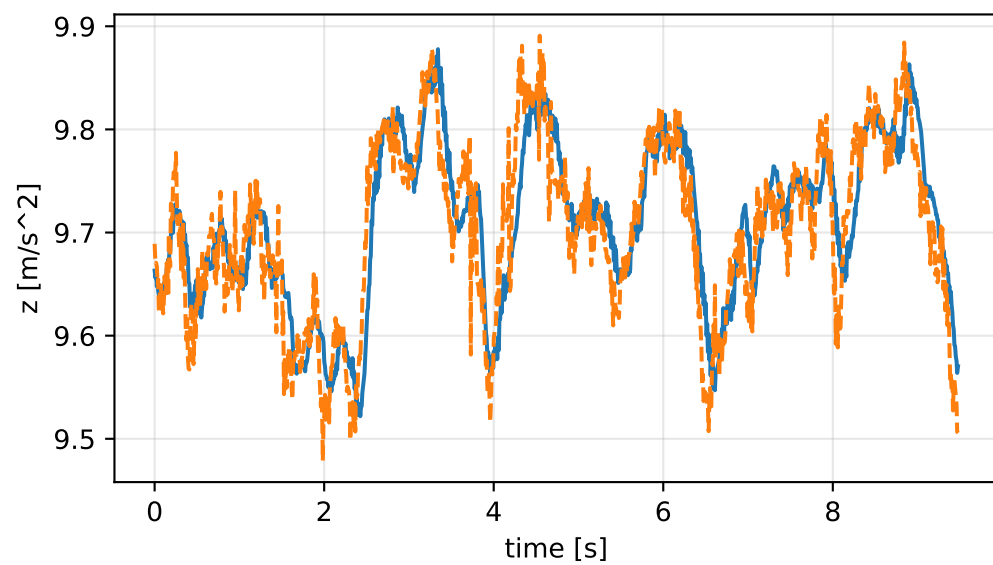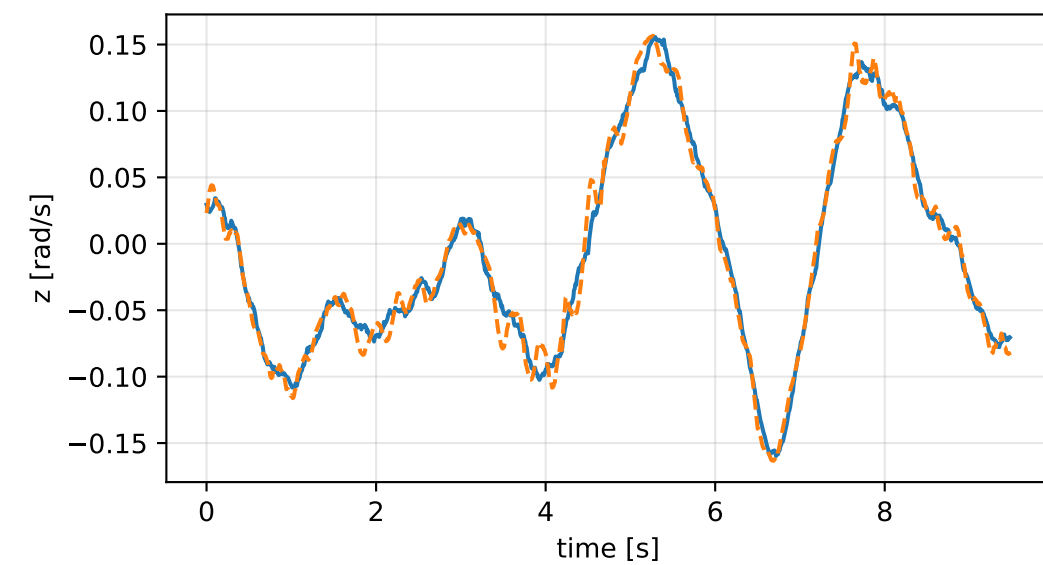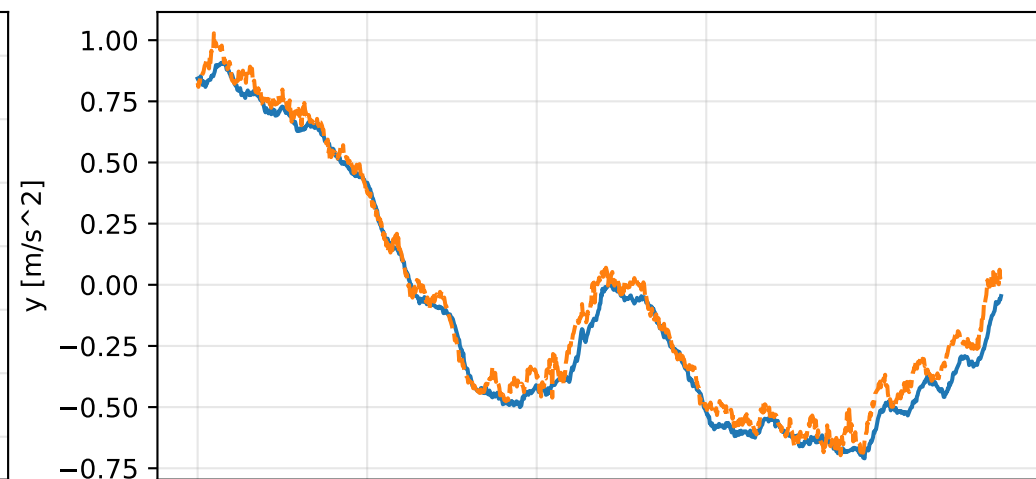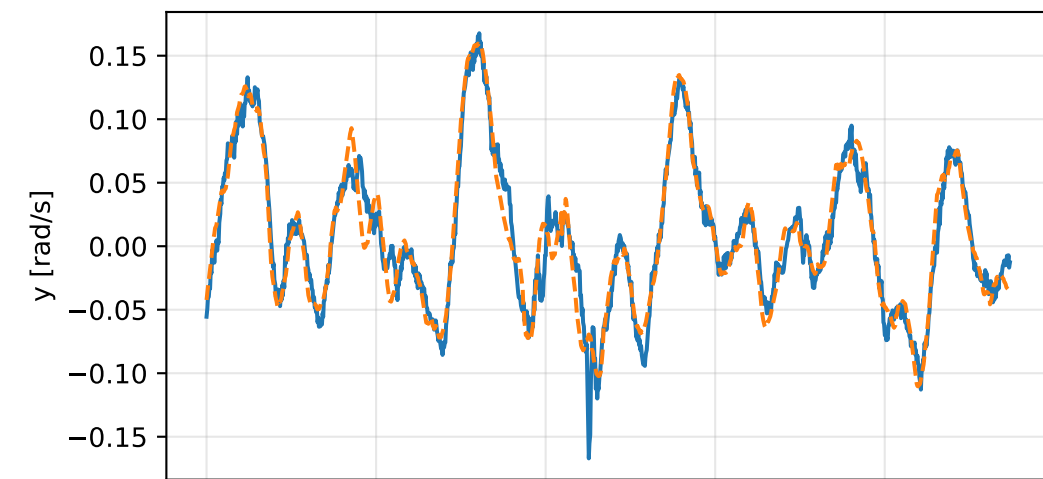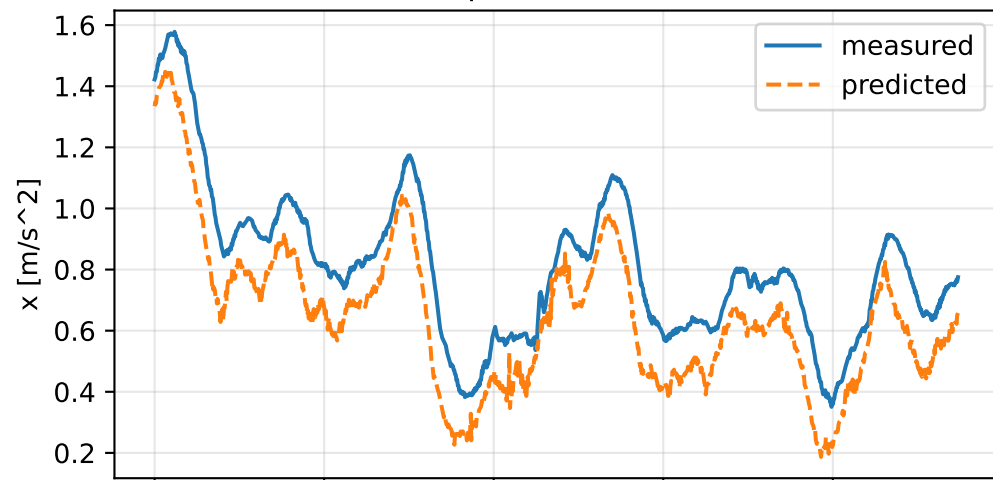

so3_naive_rotation_vector_derivatives: nominal -> estimated parameters

Case: so3_naive_rotation_vector_derivatives
status: completed (all stages completed)

mass [kg] nominal 2.35159759 estimated 1.05477831 delta -1.29681928

inertia [kg m^2] (nominal -> estimated; delta)

[6.5000061e-02 -7.2789925e-07 1.9015080e-05] -> [114.6746528 -68.0230461 -72.275074] d=[114.6096527 -68.0230454 -72.275074]
[-7.2789925e-07 6.4952656e-02 5.9167305e-08] -> [-68.0230461 146.7544643 -57.15777] d=[-68.0230454 146.6895116 -57.15777]
[1.9015080e-05 5.9167305e-08 1.2899211e-01] -> [-72.275074 -57.15777 139.839655] d=[-72.275093 -57.1577701 139.7106629]

CoG [m] [-2.0247086e-03 -3.0526579e-05 9.5097496e-03] -> [-1.3323962 -0.9580733 -1.105483] d=[-1.3303715 -0.9580428 9.5097496e-03]

rotor force effectiveness

[1. 1. 1. 1.] -> [0.2277753 0.2408446 0.4036175 0.5505428] d=[-0.7722247 -0.7591554 -0.5963825 -0.4494572]

rotor lag [s] 0.19999995

gimbal lag [s] 0.0503430566