



QUICK SPEC SHEET

12V 460Ah

ELITE SERIES

LiFePO4 BATTERY

MODEL **C12460A**

V2 | Bluetooth | Victron Ready | Heated | IP67 Waterproof

12.8V NOMINAL

460Ah CAPACITY

5.89kWh ENERGY

230A OUTPUT

IP67 RATED

VOLTAGE CLASS


12V

PARALLEL LIMIT

Max 16

WARRANTY

11 Year

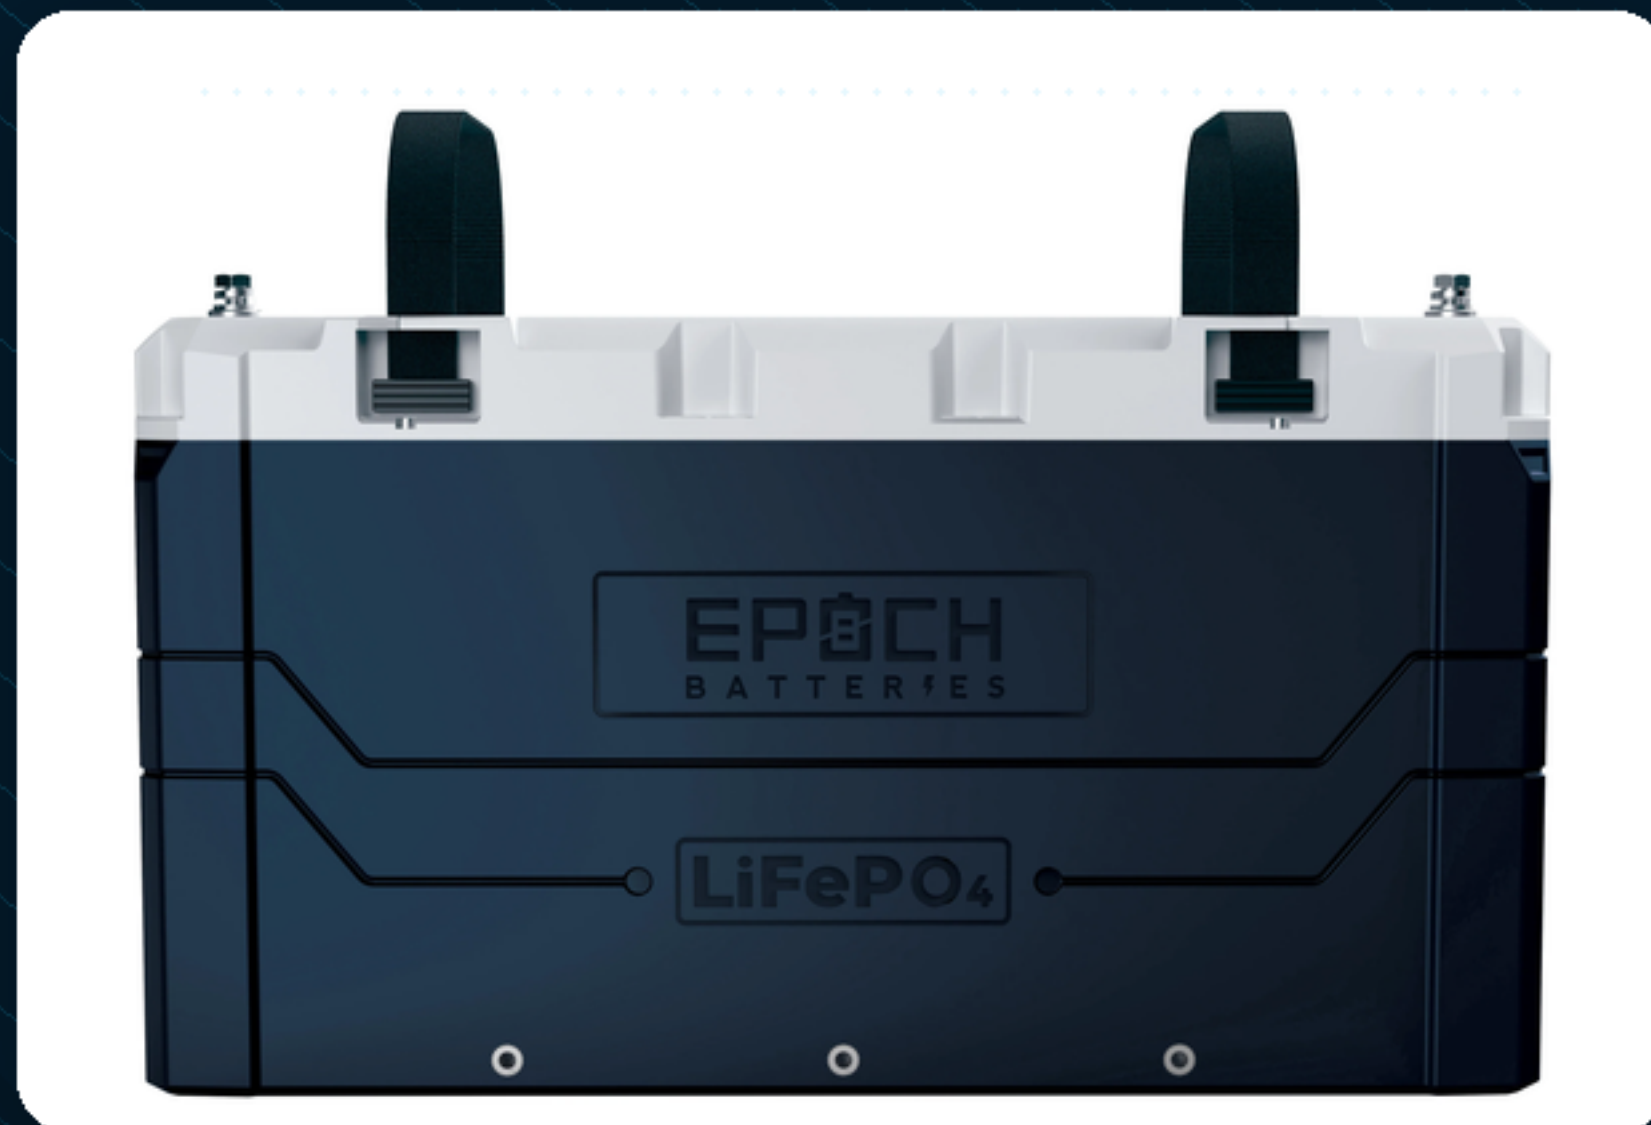

PRODUCT HIGHLIGHTS



11 YEAR
WARRANTY




3500+
CYCLES



BLUETOOTH
APP



VICTRON
READY



ADVANCED
BMS



230A
OUTPUT



SELF
HEATING



IP67
PROTECTION

Quick Specifications

High-priority specifications and LiFePO4 product features, reorganized for fast scanning.

ELECTRICAL & SYSTEM	
Model	C12460A
Series	Elite Series V2
Battery Type	Heated Bluetooth LiFePO4 with Victron Comms
Group Size	Group 8D
Chemistry	LiFePO4
Cell Type	Prismatic LiFePO4
Cell Config.	4S2P
Voltage Class	12V
Nominal Voltage	12.8V
Capacity	460Ah
Energy Stored	5.89kWh
Operating Range	10.0V - 14.6V
Max Charge V	14.6V
System Config.	Max 4 in Series / 16 in Parallel
Self-Heating	Yes

CHARGE SETTINGS	
Max Cont. Charge	230A
Max Charge 5 Sec	400A
Bulk/Absorption	14.2V
Absorption End	15 min max
Float Voltage	13.5V
Re-bulk	13.3V
Temp Comp	0mV/C (none)
Equalization	Disabled
BMS High Cutoff	14.6V
SoC Recal.	14.6V manual / Victron custom

INSTALL NOTE

Confirm charger profile, cabling, overcurrent protection, terminal torque, and temperature limits before installation.

DISCHARGE & TEMPERATURE	
Max Cont. Disch.	230A
Peak Output	500A (30 sec)
Burst Output	1300A (1 sec)
Large Inverters	3000W+ systems when properly designed
Discharge Temp	-20C to 55C / -4F to 131F
Charge Temp	-30C to 55C / -22F to 131F with heat
Cell Charge Temp	0C to 55C / 32F to 131F
Storage <= 1 mo	-20C to 45C / -4F to 113F
Storage <= 1 yr	0C to 35C / 32F to 95F
Low-temp Charge	Self-heating enabled

MECHANICAL & CONNECTIONS	
Dimensions	20.86 x 8.65 x 12.06 in
Metric Size	529.8 x 219.8 x 306.3 mm
Weight	97 lb / approx. 44 kg
Terminal Type	M8
Terminal Torque	8 - 12 Nm
Case Material	ABS & PC blend
Flame Rating	UL94-V0
Enclosure	IP67 waterproof
Cooling	Natural / passive convection

CHARGER NOTE

Use lithium-compatible charging equipment. For Victron systems, configure the communication harness, GX device, and DVCC per the installation manual.

BMS PROTECTIONS	
Smart BMS	Built-in management
Overcharge	Protected
Over-discharge	Protected
Over-current	Protected
Short Circuit	Protected
High / Low Temp	Disconnect protection
Internal Fuse	400A rated; UL60691 certified
Bluetooth	iOS / Android apps
CANbus	500 kbit/s Victron comms
Controls	Power button + gauge included

COMPLIANCE	
Pack Cert.	UL1973
Cell Cert.	UL1642; UL9540A; IEC 62619:2022
Fuse Cert.	UL60691 internal fuse
Compliance	CE, RoHS
Shipping	UN3480, Class 9
Warranty	11 Year Manufacturer

LIFEPO4 FEATURES & SUPPORT	
Cycle / Service Life	3500+ cycles; maintenance-free
Victron Ready	BMS CAN + GX integration
Bluetooth Monitoring	Live app status + OTA support
Parallel Expansion	Max 16 in Parallel
Series Expansion	Max 4 in Series
Outdoor Ready	IP67 dust / waterproof
Cold Charging	Self-heating support
Included Display	Power button + battery gauge
Support	US based technical support



EpochBatteries.com



1-888-501-1846



support@epochbatteries.com



Marietta, GA | San Juan, PR

Specs condensed from Epoch published product resources. Verify final ratings before print release.