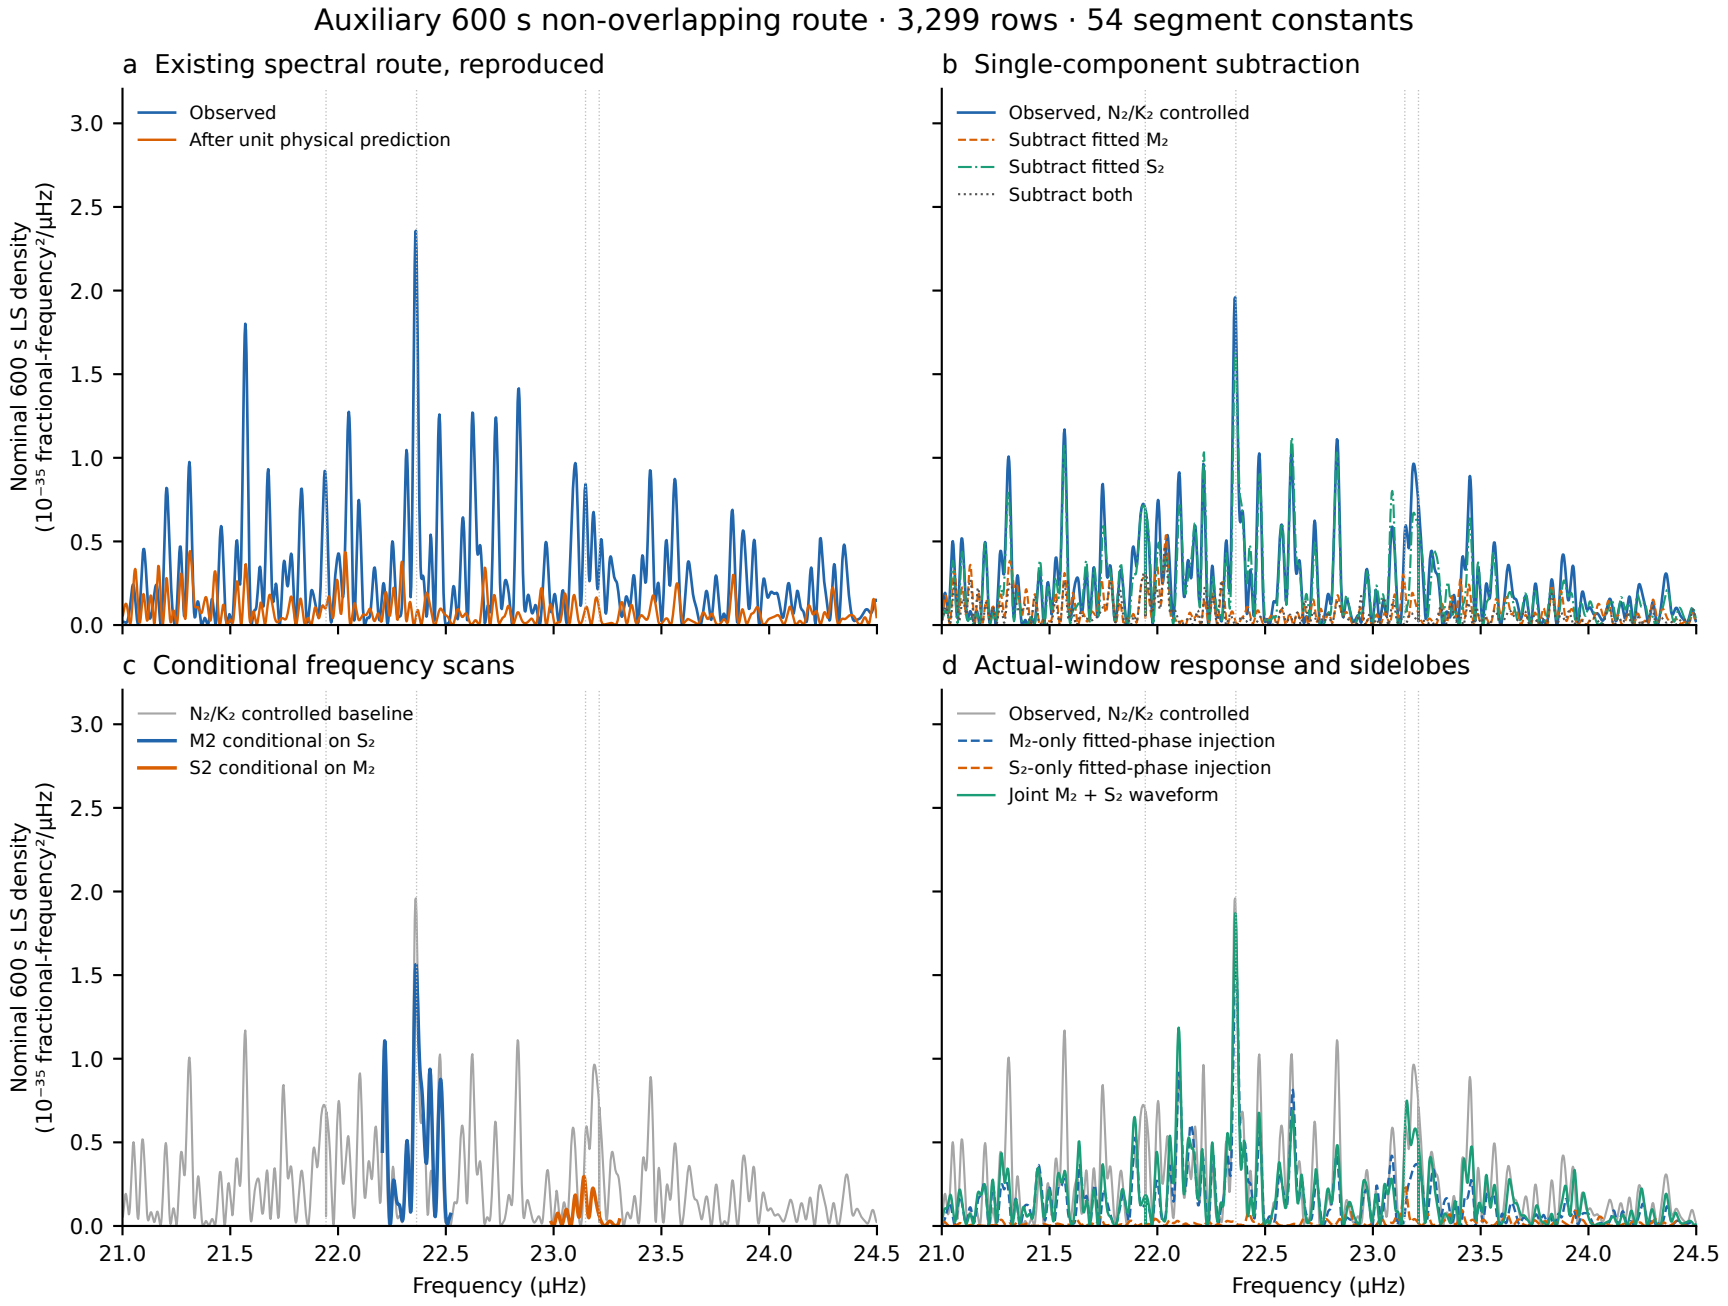

Auxiliary 600 s non-overlapping route · 3,299 rows · 54 segment constants
a Existing spectral route, reproduced
Observed
After unit physical prediction
b Single-component subtraction
Observed, N₂/K₂ controlled
Subtract fitted M₂
Subtract fitted S₂
Subtract both
c Conditional frequency scans
N₂/K₂ controlled baseline
M2 conditional on S₂
S2 conditional on M₂
d Actual-window response and sidelobes
Observed, N₂/K₂ controlled
M₂-only fitted-phase injection
S₂-only fitted-phase injection
Joint M₂ + S₂ waveform
Nominal 600 s LS density
(10⁻³⁵ fractional-frequency²/μHz)
Frequency (μHz)
0.0
0.5
1.0
1.5
2.0
2.5
3.0
21.0
21.5
22.0
22.5
23.0
23.5
24.0
24.5