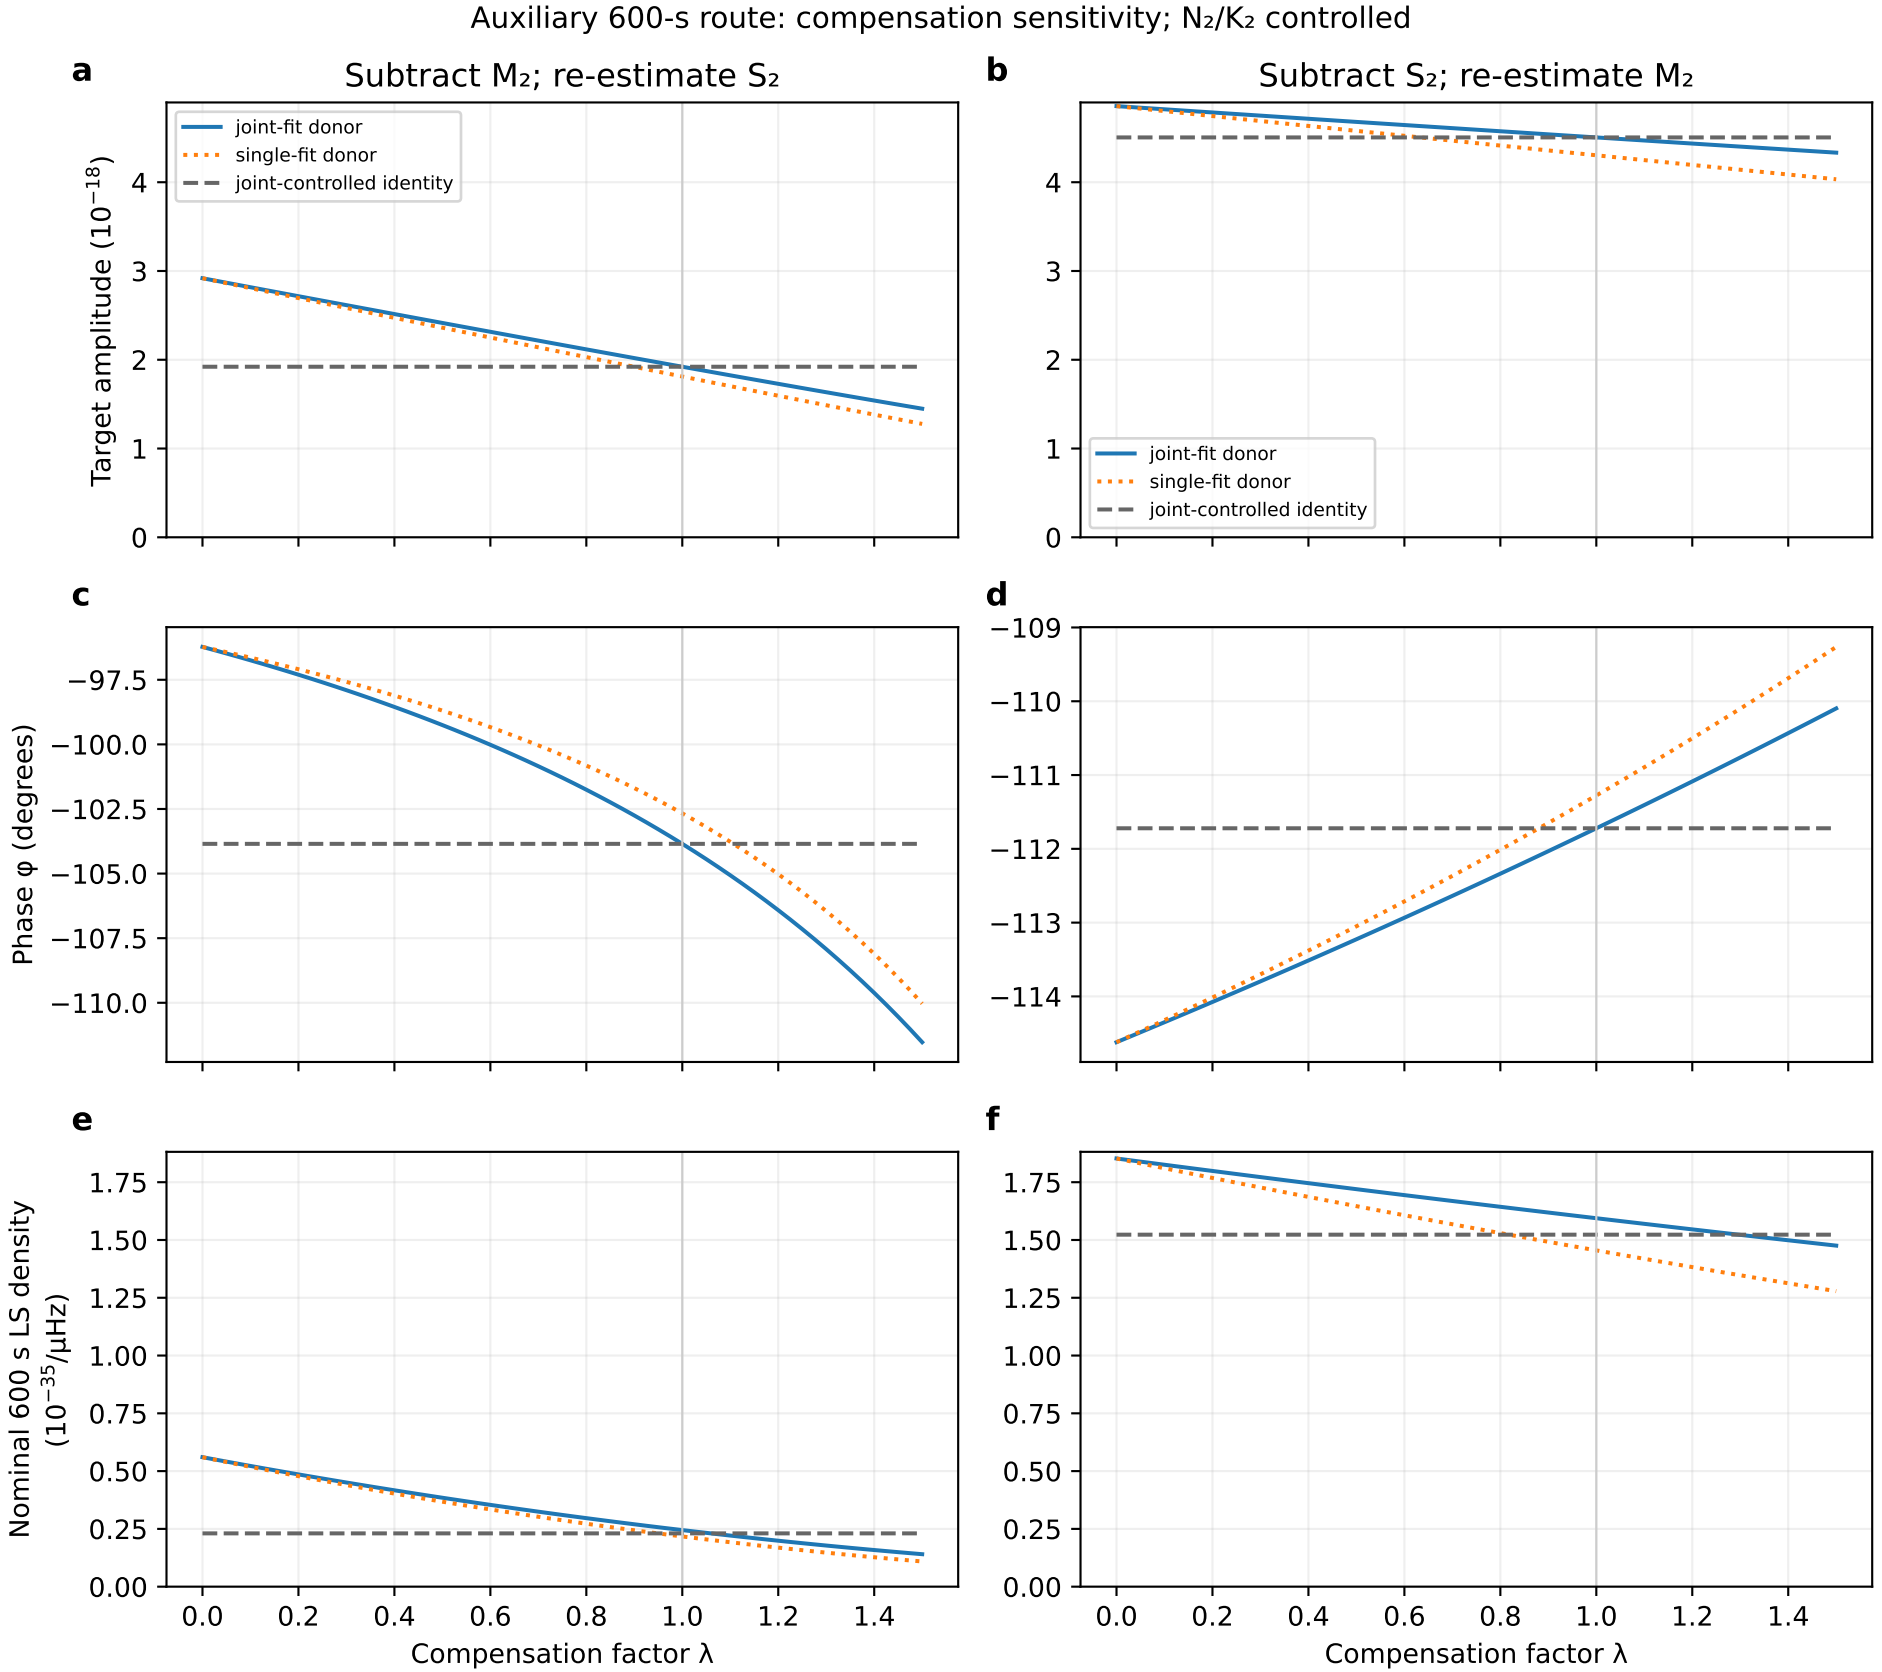
Auxiliary 600-s route: compensation sensitivity; N₂/K₂ controlled
a
Subtract M₂; re-estimate S₂
b
Subtract S₂; re-estimate M₂
joint-fit donor
single-fit donor
joint-controlled identity
Target amplitude (10⁻¹⁸)
c
d
Phase φ (degrees)
e
f
Nominal 600 s LS density (10⁻³⁵/μHz)
Compensation factor λ