



INNOVATIVE
ADAPTABLE
SAFE

- ▶ HIGHLY VISIBLE GATE PROVIDES POSITIVE, VISUAL VEHICLE CONTROL
- ▶ FLAGGER STANDS AT A SAFE LOCATION WHILE CONTROLLING TRAFFIC
- ▶ OPERATOR TRAINING TAKES LESS THAN 5 MINUTES
- ▶ LIGHTWEIGHT DESIGN WITH SMALL FOOTPRINT
- ▶ ONE FLAGGER CAN CONTROL ONE TO FOUR UNITS WITH A CLEAR LINE OF SIGHT
- ▶ QUICK SET UP TIME. CAN BE REPOSITIONED BY HAND AS OPPOSED TO BY TRUCK
- ▶ MULTIPLE SUPPORT OPTIONS REQUIRING ONLY A SINGLE TOWING VEHICLE

 **MADE IN CANADA**
DESIGN • MANUFACTURING • SHIPPING

AUTOMATED FLAGGER ASSISTANCE DEVICE (AFAD)


PHONE : 450.444.0006 | WWW.SIGNAL.CA | E-MAIL : INFO@SIGNAL.CA

- ▶ MAINTAINS A SAFE TRAFFIC FLOW
- ▶ ERGONOMIC AND COMPACT
- ▶ HIGH VISIBILITY ENCOURAGES DRIVERS TO SLOW DOWN
- ▶ HIGH ENERGY EFFICIENT DESIGN
- ▶ UP TO 4 GATES CONTROLLED BY ONE FLAGGER (LORA)
- ▶ ULTRA-BRIGHT LED LIGHTS

NEW
SLIM PROFILE
TRAFFIC LIGHTS
+ HIGHLY VISIBLE
+ EASY TO HANDLE
+ EASY TO STORE



**8" SLIM
PROFIL HEAD**

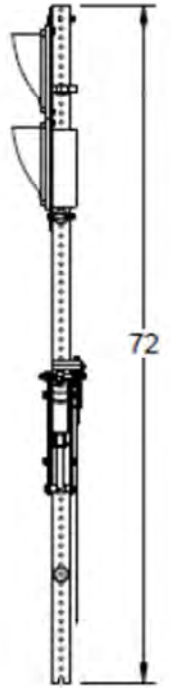

COMPATIBLE WITH THE EFFIA SYSTEM

AUTOMATED FLAGGER ON MOBILE BATTERY BOX

MOBILE BOX - FOR BATTERY
(RSS44 | RSS46)



AUTOMATED FLAGGER ON AGILE TRAILER

MULTI-PURPOSE TRAILER
(RSS60)



AUTOMATED FLAGGER ON HITCH

SLIDING BRACKET FOR HITCH
WITH 7-PIN CONNECTOR (RSS80)



PHONE : 450.444.0006 | WWW.SIGNAL.CA | E-MAIL : INFO@SIGNAL.CA

MECHANICAL FEATURES


- Traffic lights with 8" (200mm) or 12" (300mm)
- Gate arm fitted with signal flag and retro-reflective strips, conforms to Volume V

OVERALL DIMENSIONS

HEIGHT: 72" (1829MM)

GATE ARM LENGTH: 96" (2440MM)

WEIGHT: 16.6 KG (36.5 LBS)

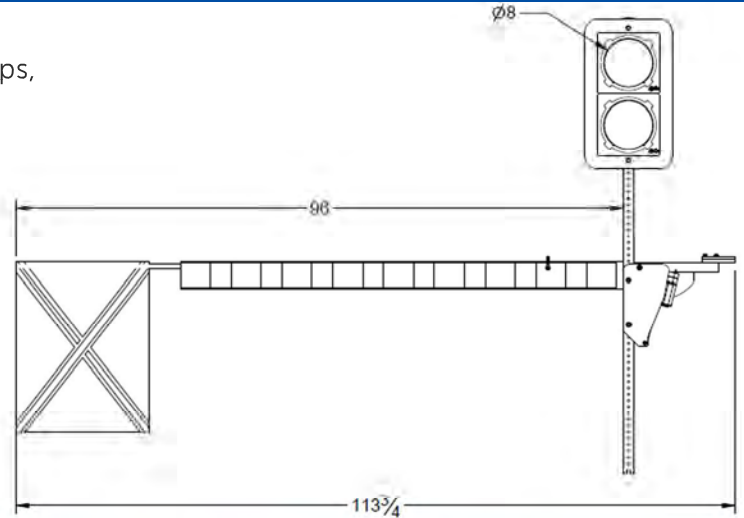

INCLUDED ACTIVATION

- HITCH SYSTEM (RSS80)
- MULTI-PURPOSE TRAILER (RSS60)
- MOBILE BATTERY BOX (RSS44)

INCLUDED ACTIVATION WITH EACH SYSTEM

- ▶ Two (2x) wireless keys included with the system.
- ▶ Weatherproof wired switch, 20' length



ELECTRICAL FEATURES

- GATE ARM PROTECTED AGAINST OBSTACLES IN 2 WAYS
- LOW ENERGY CONSUMPTION LESS THAN 1A @ 12VDC

- ▶ PROTECTION MECHANISM IN CASE OF OBSTACLES



ACTIVATION OPTIONS :

Included options

- Unit activation by wireless key
2 included | FBS1x - FBS1xR
- Unit activation by wired push button
1 included | FBS1x - FBS1xR

Included options

- Unit activation by sipral coil wired switch box
Installed by manufacturer | FBS1x - FBS1xR
- Unit activation by LoRa remote control with 1 km range - Allows the control of up to 4 units
compatible with FBS1xR