


	Product code: BAL15P	
	Product name: Fire Hydrant Marker	
	Created: 06/05/2025	By: Zakaria Khier
	Revised:	By:
Technical sheet	Comment: _____	

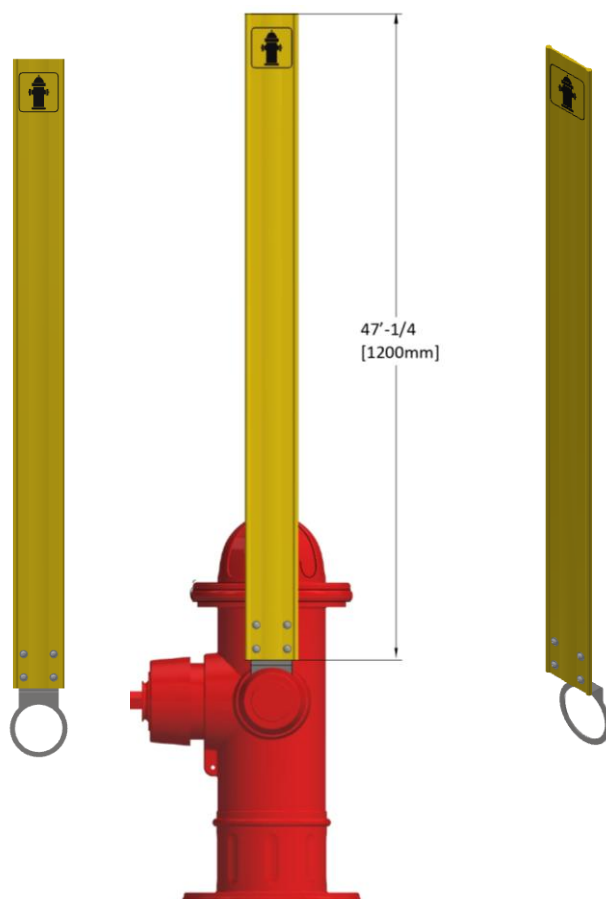

Property	Value
Material	Pultruded fibreglass (FRP)
Length	47'-1/4 po (1200 mm)
Width	3'-7/8 po (9.8 mm)
Colour	Yellow
Approximate weight	~1 kg

Description

Vertical marker designed to make fire hydrants easier to see, especially in bad weather (snow, fog) or when the view is blocked. Its UV varnish coating, used to intensify the yellow colour and strengthen the product's visual impact, also protects against wear. Its distinctive symbol lets emergency services identify the location of the fire hydrant quickly and reliably.

- High visibility: quick to spot, even in bad weather.
- Durable: withstands the elements for a long time.
- Greater safety: quick to locate in an emergency.
- Secure mounting: held firmly by Nylock nuts.
- Strong and light: easy to install, impact resistant (thanks to the FRP).

Applications

- Marking fire hydrants in urban and rural areas.
- Marking hydrants in parking lots, industrial zones and residential complexes.
- Improving overall fire safety.

	Product code: BAL15P	
	Product name: Fire Hydrant Marker	
	Created: 06/05/2025	By: Zakaria Khier
	Revised:	By:
Technical sheet		Comment: _____

Material properties – FRP

Test	Result
Main materials	Fibreglass E-glass Roving / EDR480
	Resin Polyester resin
	Continuous coated Continuous coated fibreglass
Fibreglass content	60%
Tensile strength	≥ 50,000 PSI
Compressive strength	≥ 45,000 PSI
Glass reinforcement weight percentage - Barcol hardness	≥ 45
Impact resistance (using a passenger sedan)	Low-speed impact resistance: 56 km/h
	High-speed impact resistance: 15 km/h
UV resistance	2000h
Fire resistance (during fire)	6 min à 8 min
Operating temperature	-50°C à +60°C
Reflective label visibility	Night or day light