




Product code:	BOLN434Y3	
Product name:	Round black bollard, 1.2m (4') high, 80 mm (3-1/4") dia., 4 yellow HI bands Integral moulded base with 3 holes	
Created:	29/04/2025	By: Zakaria Khier
Revised:		By:
<u>Comment:</u>		

Technical sheet

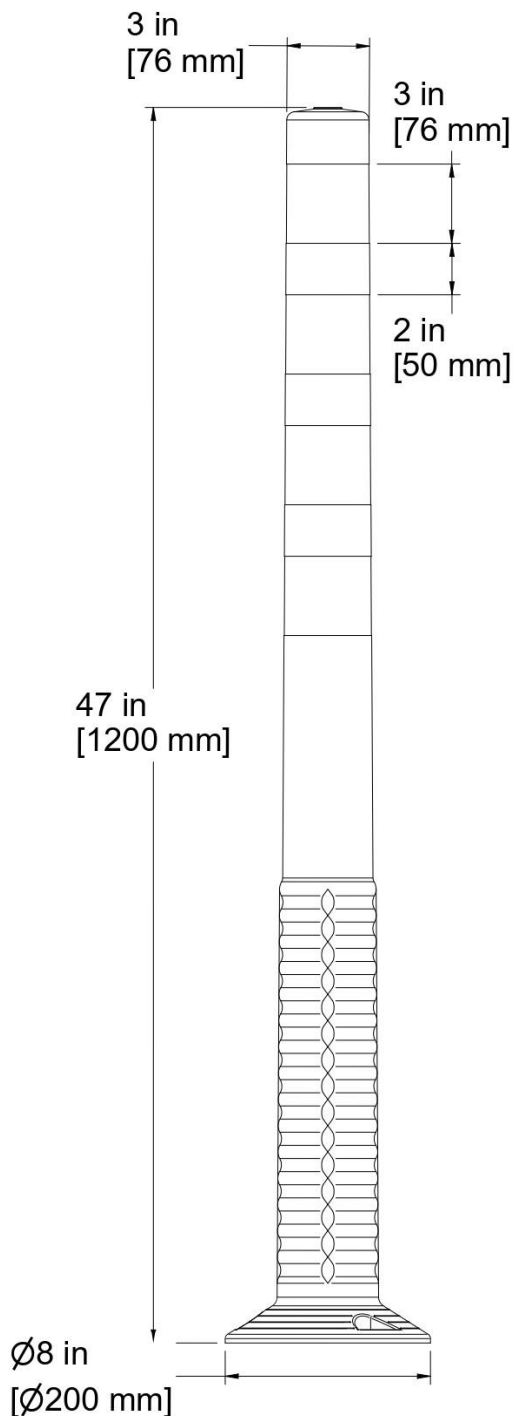

Property

Property	Value
Material	Polyethylene
Length	47 po (1200 mm)
Bollard diameter	3 po (76 mm)
Base diameter	8 po (200 mm)
Colour	Black
Reflective band	High-intensity prismatic ASTM D4956
Approximate weight	2 kg (4.5lb)

Description

Flexible, deformable traffic control and road safety bollard designed to mark out traffic lanes, protect pedestrians and infrastructure, and absorb impacts by **deforming temporarily to minimize damage.**

Its high flexibility lets it bend easily and return to its original shape after a collision. It is also **UV resistant thanks to an anti-UV coating,** giving greater durability under sun exposure and keeping its colour and mechanical properties.

The reflective bands meet the ASTM D4956 standard, ensuring high retroreflection and optimal visibility at night and in low light. The bands are also mechanically protected from tearing off by a slight **recess in the bollard profile.**

Options

- BOLN434Y3: Yellow bands
- BOLN434W3: White bands

	Product code: BOLN434Y3	
	Product name: Round black bollard, 1.2m (4') high, 80 mm (3-1/4") dia., 4 yellow HI bands Integral moulded base with 3 holes	
	Created: 29/04/2025	By: Zakaria Khier
	Revised:	By:
Technical sheet	<u>Comment:</u>	

Benefits

- Customizable: you can add your own logo or preferred signature.
- **High visibility:**
 - Excellent 360° visibility, so drivers and pedestrians see it better.
 - High-intensity reflective film for safety and visibility at night.
- **Durability and strength:**
 - Resists weather, impacts and ageing.
 - Suited to extreme temperatures, from -30°C to 45°C.
 - The polyethylene column resists UV rays
- **Safety and stability:**
 - Non-slip, absorbs impacts and stays stable on uneven surfaces.
 - Quickly returns to its original shape, even after being run over by a heavy vehicle, limiting damage and staying functional.
- **Installation and maintenance:**
 - Easy installation, usually bolted to the ground.
 - Low maintenance: does not need frequent servicing.
- **Cost-effective:**
 - Low replacement and repair costs.

Applications

- Separating and marking traffic lanes (roads, highways, parking lots).
- Protecting pedestrian areas and bike paths.
- Guiding and channelling traffic.
- Marking out work and construction zones.